
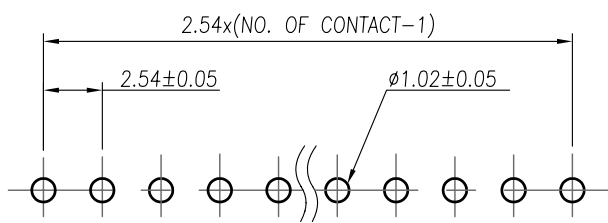



F
E
D
C
B
A

1 2 3 4 5 6 7 8

勝 特 力 材 料 886-3-5753170
勝特力电子(上海) 86-21-54151736
勝特力电子(深圳) 86-755-83298787
Http://www.100y.com.tw

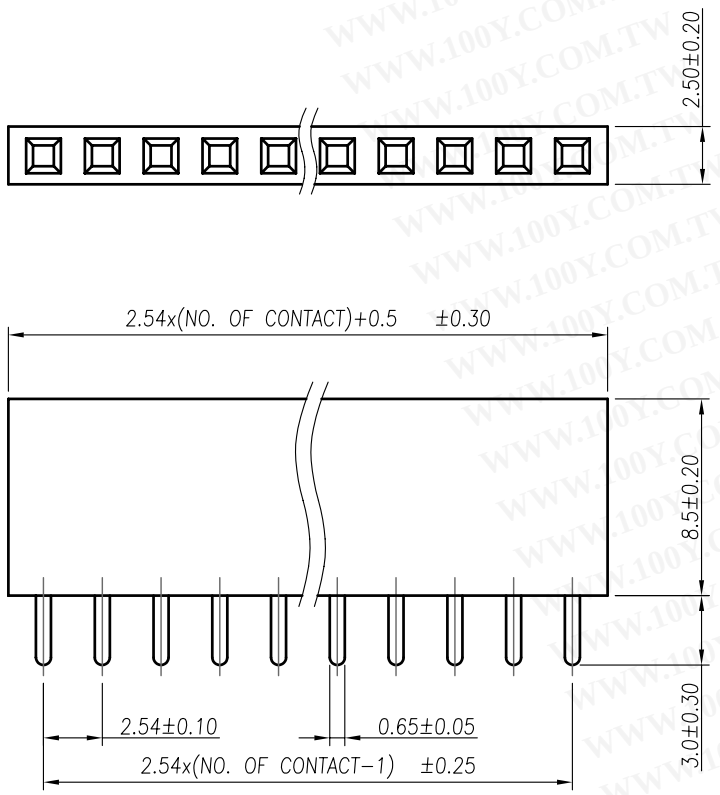

P.C.B. LAYOUT

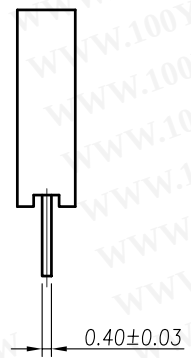

- NOTES:
- SPECIFICATION
- 1.Current Rating: 3A
 - 2.Withstanding Voltage: 500 VAC (1 Minute)
 - 3.Insulation Resistance: 1000 Megohms Min.
 - 4.Contact Resistance: 30 Milliohms Max.
 - 5.Operating Temperature: -40°C to +85°
 - 6.Retention Force: 450g Min.

- MATERIAL
- 1.Contact: Brass
 - 2.Insulator:PBT & 30% G.F.
 - 3.Plated: Gold Flash For All

ORDER INFORMATION

FPHSB-1 XX 01B010

NO. OF CONTACT

DIMENSION IN mm [Inch]		PROD. SPEC.	C	
TOLERANCE UNLESS OTHERWISE SPECIFIED		PKG. SPEC.	TITLE HEADER FEMALE 2.54mm S/R DIP PROFILE=8.50mm	
.X±0.30	X.*± 1°	APPROVE	CUSTOMER DRAWING	
.XX±0.20	.X.*± 0.5°	CHECK	FILE NO.	DWG NO. FPHSB-1XX01B010
.XXX±0.10	.XX.*± 0.25°	DRAW	SIZE A4	PROJ. SHEET 1 / 1
			SCALE 3:1	REV A

F
E
D
C
B
A