

# POWER RELAY

## 1 POLE—5,10 A (CADMIUM FREE CONTACTS TYPE)

## FTR-F2 /H2 SERIES

RoHS compliant

### ■ FEATURES

- HIGH DENSITY MOUNTING  
Saves space by 26% compared to FTR-H1 type.
- HIGH ISOLATION  
Insulation Distance: Minimum 6mm between coil and contact  
Dielectric Strength: 4KV  
Surge Strength: 10KV
- HIGH NOISE RESISTANCE  
Uses card separation for high noise resistance between coil and contact
- HEAT RESISTANCE, FLAMMABILITY  
Class B (130° C) insulation, flammability 94V-0
- CADMIUM FREE CONTACT FOR ECO-PROGRAM
- SAFETY STANDARDS  
UL, CSA, VDE approved, SEMKO (pending)  
UL/CSA TV-5 rating approved
- RoHS compliant since date code: 0437L2  
Please see page 8 for more information



### ■ ORDERING INFORMATION

[Example]      FTR-F2    A   K   012   T   - \*\*  
                   (a)        (b) (c)   (d)   (e)   (f)

|     |                      |                                                                                                  |
|-----|----------------------|--------------------------------------------------------------------------------------------------|
| (a) | Series Name          | FTR-F2 : FTR-F2 Series (5A)<br>FTR-H2 : FTR-H2 Series (10A)                                      |
| (b) | Contact Arrangement  | A : 1 Form A (SPST-NO)                                                                           |
| (c) | Coil Type            | K : Standard (530mW)<br>L : High sensitivity (250mW) FTR-F2/H2<br>A : Sealed type (530mW) FTR-H2 |
| (d) | Coil Nominal Voltage | 005 : 5DC      012 : 12DC<br>006 : 6DC      024 : 24DC<br>009 : 9DC      048 : 48DC              |
| (e) | TV-Rating            | T : TV-5                                                                                         |
| (f) | Custom Designation   | To be assigned custom specification                                                              |

# FTR-F2/H2 Series

## ■ SAFETY STANDARD AND FILE NUMBERS

UL508 (File No. E63614)

C22.2 No.1and No. 14 (File No. LR40304)

VDE 0435, 0860 (File No. 11039-4940-1020)

|        | Nominal voltage | Contact rating                                                                                                                       |
|--------|-----------------|--------------------------------------------------------------------------------------------------------------------------------------|
| FTR-F2 | 5 to 48 VDC     | TV-5 125 VAC<br>1/2 HP 250 VAC 1/6 HP 125 VAC<br>5 A 250 VAC/ 30 VDC resistive<br>2 A 250 VAC inductive (PF=0.4)<br>Pilot duty C 300 |
| FTR-H2 | 5 to 48 VDC     | TV-5 120 VAC<br>1/2 HP 250 VAC 1/6 HP 125 VAC<br>10 A 30 VDC/250 VAC resistive<br>3A 250VAC inductive (PF=0.4)<br>Pilot duty C300    |

勝特力材料 886-3-5753170  
勝特力电子(上海) 86-21-54151736  
勝特力电子(深圳) 86-755-83298787  
[Http://www.100y.com.tw](http://www.100y.com.tw)

## ■ SPECIFICATIONS

| Item       |                                   |                           | FTR-F2 Series                            |           | FTR-H2 Series       |           |
|------------|-----------------------------------|---------------------------|------------------------------------------|-----------|---------------------|-----------|
|            |                                   |                           | Standard                                 | Sensitive | Standard            | Sensitive |
| Contact    | Arrangement                       |                           | 1 Form A (SPST-NO)                       |           |                     |           |
|            | Material                          |                           | Silver Alloy                             |           |                     |           |
|            | Resistance (initial)              |                           | Maximum 100 mohm (at 1A 6VDC)            |           |                     |           |
|            | Rating (resistive)                |                           | 250VAC / 30VDC, 5A                       |           | 250VAC / 30VDC, 10A |           |
|            | Maximum Carrying Current          |                           | 5A                                       |           | 10A                 |           |
|            | Maximum Switching Rating          |                           | 1250VA / 150W                            |           | 2500VA / 300W       |           |
|            | Maximum Switching Voltage         |                           | 400VAC /300DC                            |           |                     |           |
|            | Maximum Switching Current         |                           | 5A                                       |           | 10A                 |           |
|            | Minimum Switching Load            |                           | 100 ma, 5VDC                             |           |                     |           |
|            | Maximum Inrush Current            |                           | 78A, 120VAC (at lamp load)               |           |                     |           |
| Coil       | Nominal Power (at 20° C)          |                           | 530mW                                    | 250mW     | 530mW               | 250mW     |
|            | Operate Power (at 20° C)          |                           | 260mW                                    | 160mW     | 260mW               | 160mW     |
|            | Operating Temperature             |                           | -40° C to +70° C (no frost)              |           |                     |           |
| Time Value | Operate Time (at nominal voltage) |                           | Maximum 15ms                             |           |                     |           |
|            | Release Time (at nominal voltage) |                           | Maximum 5m s                             |           |                     |           |
| Insulation | Resistance (at 500VDC)            |                           | Minimum 1,000 Mohm                       |           |                     |           |
|            | Dielectric Strength               | Between open contacts     | 1,000 VAC 1 minute                       |           |                     |           |
|            |                                   | Between coil and contacts | 4,000 VAC 1 minute                       |           |                     |           |
|            | Surge Strength                    |                           | 10,000V (at 1.2 x 50ms)                  |           |                     |           |
| Life       | Mechanical                        |                           | 2 x 10 <sup>6</sup> operations minimum   |           |                     |           |
|            | Electrical                        | Contact Rating            | 100 x 10 <sup>3</sup> operations minimum |           |                     |           |
|            |                                   | Lamp Load                 | 25 x 10 <sup>3</sup> operations minimum  |           |                     |           |
| Other      | Vibration Resistance              | Misoperation              | 10-55 Hz (double amplitude of 1.5mm)     |           |                     |           |
|            |                                   | Endurance                 | 10-55 Hz (double amplitude of 1.5mm )    |           |                     |           |
|            | Shock Resistance                  | Misoperation              | 200m/s <sup>2</sup> (11±1ms)             |           |                     |           |
|            |                                   | Endurance                 | 1,000m/ s <sup>2</sup> (11±1ms)          |           |                     |           |
|            | Weight                            |                           | Approximately 12g                        |           |                     |           |

# FTR-F2/H2 Series

勝特力材料 886-3-5753170  
 勝特力电子(上海) 86-21-54151736  
 勝特力电子(深圳) 86-755-83298787  
[Http://www.100y.com.tw](http://www.100y.com.tw)

## COIL DATA CHART

Standard Type (530mW)







| MODEL         |               | Nominal Voltage | Coil Resistance<br>( $\pm 10\%$ ) | Must Operate Voltage | Must Release Voltage |
|---------------|---------------|-----------------|-----------------------------------|----------------------|----------------------|
| FTR-F2 Series | FTR-H2 Series |                 |                                   |                      |                      |
| FTR-F2AK005T  | FTR-H2AK005T  | 5VDC            | 47 $\Omega$                       | 3.5VDC               | 0.25VDC              |
| FTR-F2AK006T  | FTR-H2AK006T  | 6VDC            | 68 $\Omega$                       | 4.2VDC               | 0.3VDC               |
| FTR-F2AK009T  | FTR-H2AK009T  | 9VDC            | 155 $\Omega$                      | 6.3VDC               | 0.45VDC              |
| FTR-F2AK012T  | FTR-H2AK012T  | 12VDC           | 270 $\Omega$                      | 8.4VDC               | 0.6VDC               |
| FTR-F2AK024T  | FTR-H2AK024T  | 24VDC           | 1,100 $\Omega$                    | 16.8VDC              | 1.2VDC               |
| FTR-F2AK048T  | FTR-H2AK048T  | 48VDC           | 4,400 $\Omega$                    | 33.6VDC              | 2.4VDC               |

Sensitive Type (250mW)








| MODEL         |               | Nominal Voltage | Coil Resistance<br>( $\pm 10\%$ ) | Must Operate Voltage | Must Release Voltage |
|---------------|---------------|-----------------|-----------------------------------|----------------------|----------------------|
| FTR-F2 Series | FTR-H2 Series |                 |                                   |                      |                      |
| FTR-F2AL005T  | FTR-H2AL005T  | 5VDC            | 100 $\Omega$                      | 4.0VDC               | 0.25VDC              |
| FTR-F2AL006T  | FTR-H2AL006T  | 6VDC            | 145 $\Omega$                      | 4.8VDC               | 0.30VDC              |
| FTR-F2AL009T  | FTR-H2AL009T  | 9VDC            | 325 $\Omega$                      | 7.2VDC               | 0.45VDC              |
| FTR-F2AL012T  | FTR-H2AL012T  | 12VDC           | 575 $\Omega$                      | 9.6VDC               | 0.60VDC              |
| FTR-F2AL024T  | FTR-H2AL024T  | 24VDC           | 2,310 $\Omega$                    | 19.2VDC              | 1.20VDC              |

Note: All values in the table are measured at 20°C.

## CHARACTERISTIC DATA

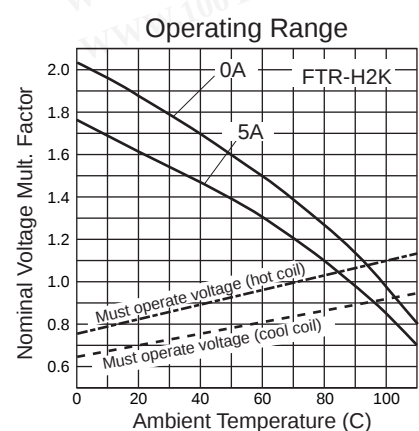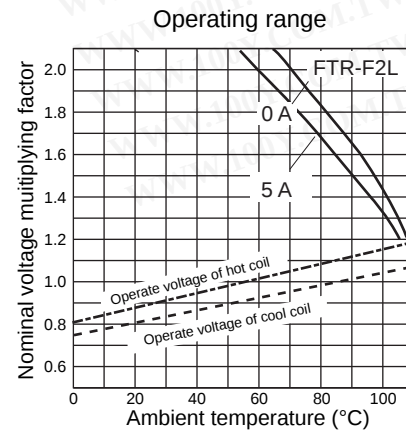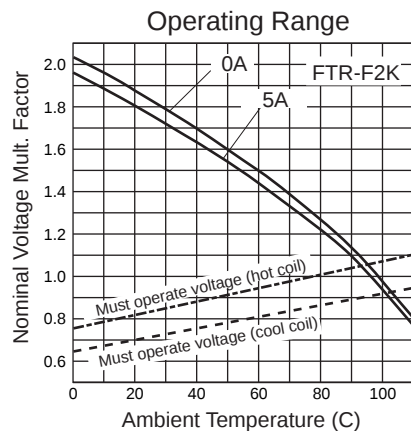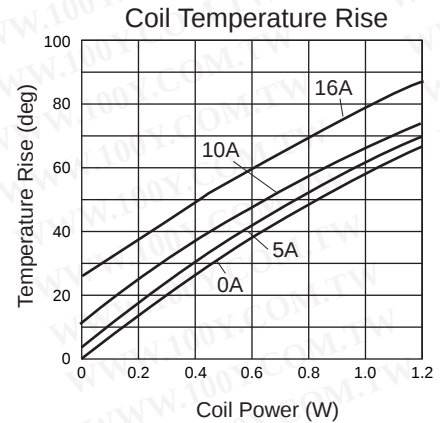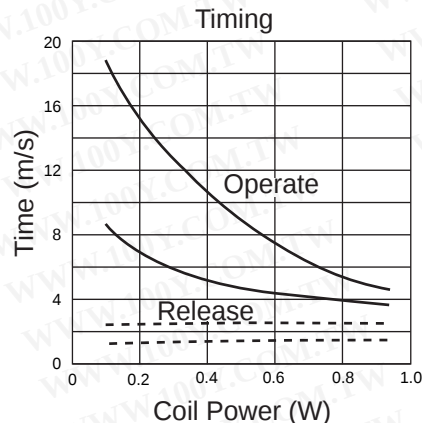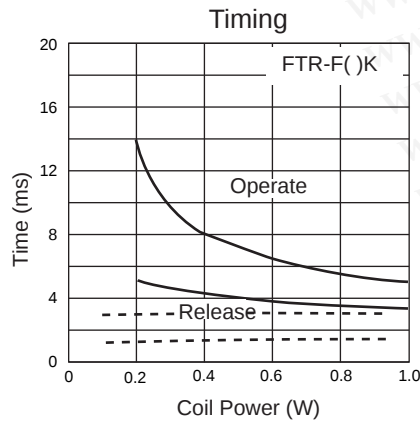


# FTR-F2/H2 Series

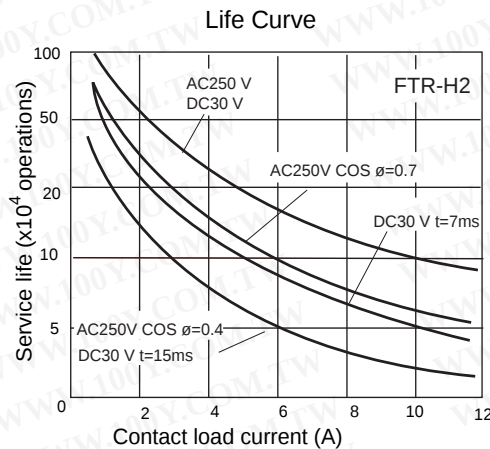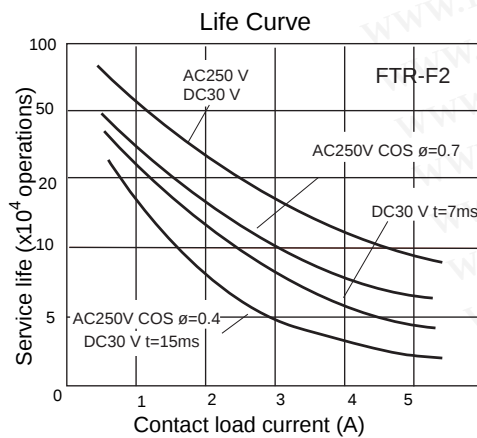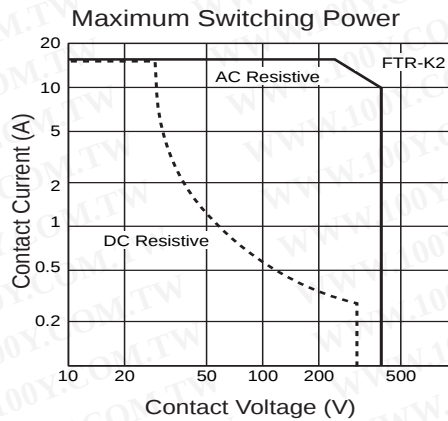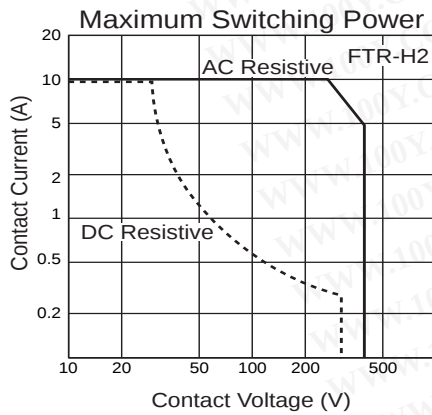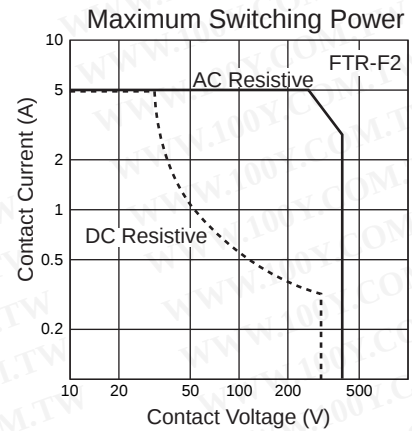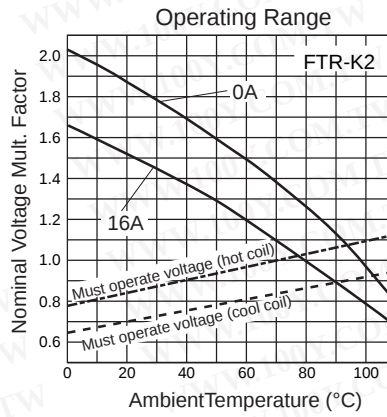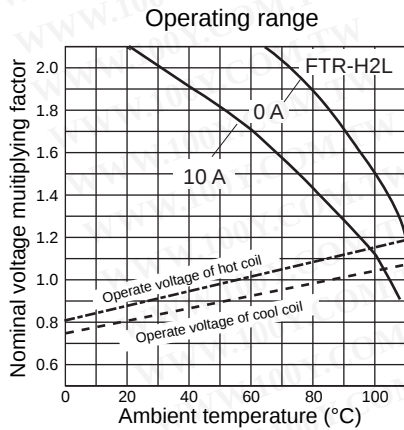


## REFERENCE DATA


Distribution of Operate & Release Voltage

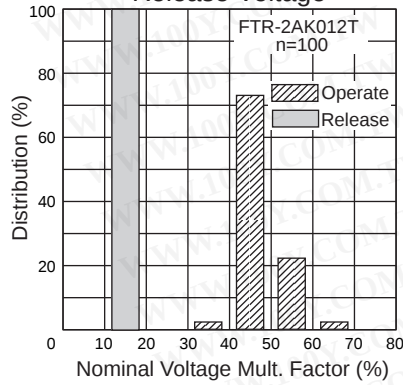


Distribution of Operate & Release Time

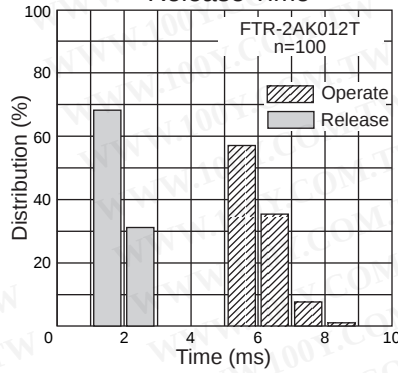


Distribution of Contact Resistance

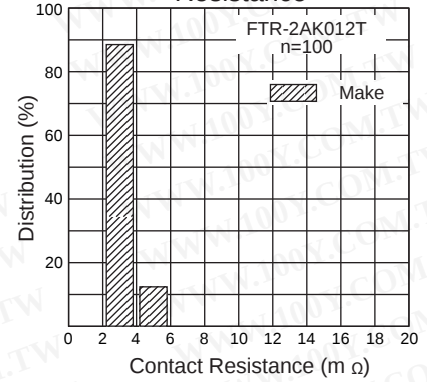


Mechanical Life Test

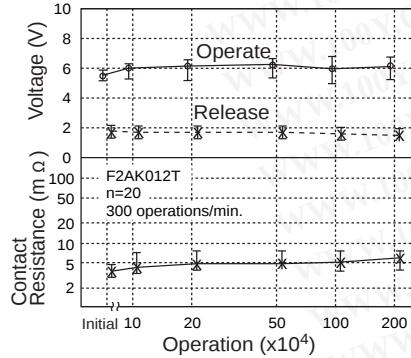


Electrical Life Test

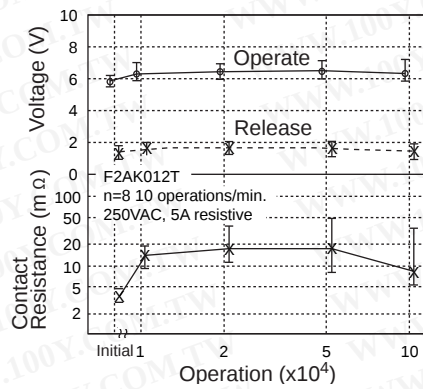


Electrical Life Test

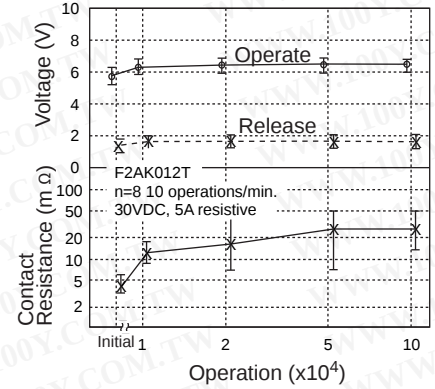


Mechanical Life Test

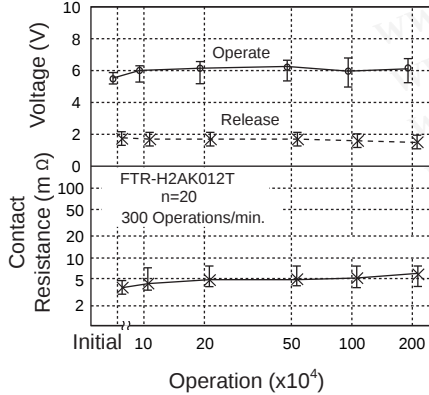


Electrical Life Test

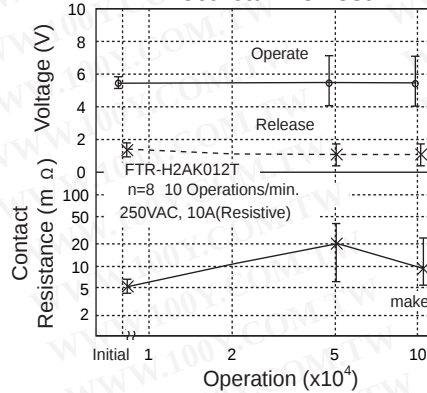


Electrical Life Test

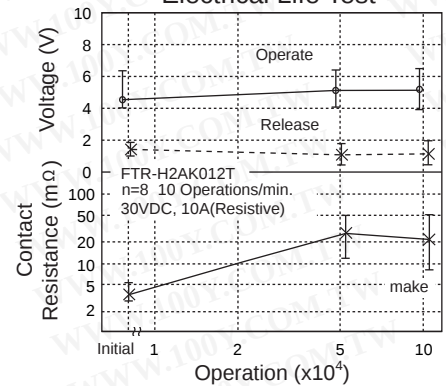


Mechanical Life Test

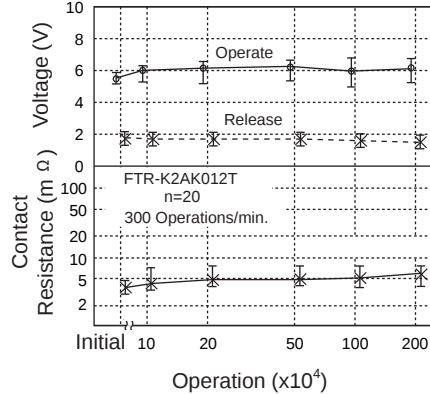

Electrical Life Test

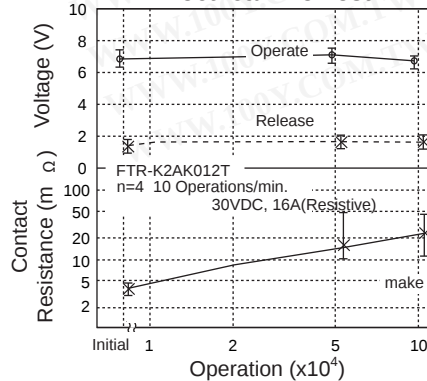


Electrical Life Test

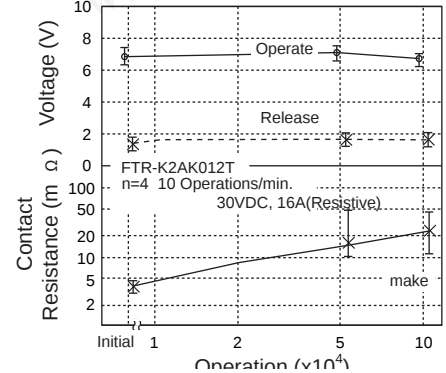


# FTR-F2/H2 Series

## ■ DIMENSIONS


### ● Dimensions

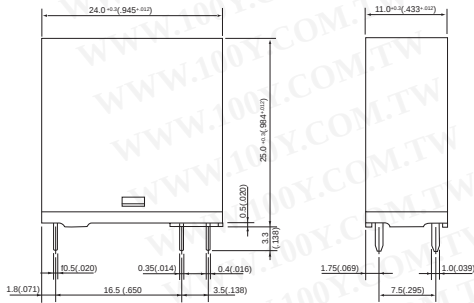

### ● Schematics (BOTTOM VIEW)



### ● PC board mounting hole layout (BOTTOM VIEW)

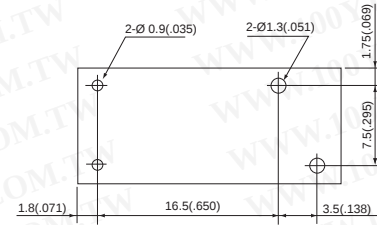

Unit: mm (in.)

勝特力材料 886-3-5753170  
 勝特力电子(上海) 86-21-54151736  
 勝特力电子(深圳) 86-755-83298787  
[Http://www.100y.com.tw](http://www.100y.com.tw)

## RoHS Compliance and Lead Free Relay Information

### 1. General Information

- Relays produced after the specific date code that is indicated on each data sheet are lead-free now. Most of our signal and power relays are lead-free. Please refer to Lead-Free Status Info. (<http://www.fujitsu.com/us/downloads/MICRO/fcai/relays/lead-free-letter.pdf>)
- Lead free solder paste currently used in relays is Sn-3.0Ag-0.5Cu.
- All signal and most power relays also comply with RoHS. Please refer to individual data sheets. Relays that are RoHS compliant do not contain the 5 hazardous materials that are restricted by RoHS directive (lead, mercury, chromium IV, PBB, PBDE).
- It has been verified that using lead-free relays in leaded assembly process will not cause any problems (compatible).
- "LF" is marked on each outer and inner carton. (No marking on individual relays).
- To avoid leaded relays (for lead-free sample, etc.) please consult with area sales office.
- We will ship leaded relays as long as the leaded relay inventory exists.

Note: Cadmium was exempted from RoHS on October 21, 2005. (Amendment to Directive 2002/95/EC)

### 2. Recommended Lead Free Solder Profile

- Recommended solder paste Sn-3.0Ag-0.5Cu.

#### Reflow Solder condition

##### Flow Solder condition:

Pre-heating: maximum 120°C  
Soldering: dip within 5 sec. at  
260°C solder bath

勝特力材料 886-3-5753170  
勝特力电子(上海) 86-21-54151736  
勝特力电子(深圳) 86-755-83298787  
[Http://www.100y.com.tw](http://www.100y.com.tw)

##### Solder by Soldering Iron:

Soldering Iron  
Temperature: maximum 360°C  
Duration: maximum 3 sec.

**We highly recommend that you confirm your actual solder conditions**

### 3. Moisture Sensitivity

- Moisture Sensitivity Level standard is not applicable to electromechanical relays.

### 4. Tin Whisker

- Dipped SnAgCu solder is known as low risk tin whisker. No considerable length whisker was found by our in house test.