

GBPC50005GT/W THRU GBPC5010GT/W


SINGLE PHASE GLASS PASSIVATED BRIDGE RECTIFIERS

FEATURES:

- Integrally molded heat sink provide low thermal resistance for max. heat dissipation
- High surge current capability
- Void-free junction soldering by using vacuum soldering
- Universal 3-way terminals : snap on, wire-around, or P.C. board mounting
- High temperature soldering guaranteed : 260° C/10 seconds at 5lbs. (2.3kg)tension
- AI plate plastic case

勝特力材料 886-3-5753170
勝特力电子(上海) 86-21-54151736
勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

GBPC-W

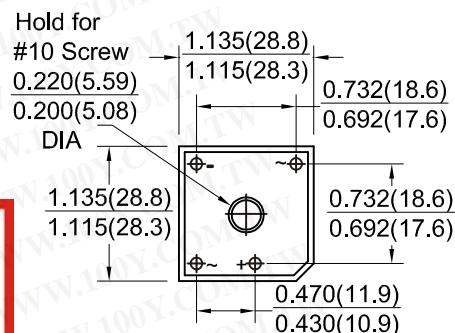

MECHANICAL DATA

Case : Molded plastic with heat-sink integrally mounted in the bridge encapsulation

Terminals : Either nickel plated 0.25"(6.35mm). Faston lugs or plated copper leads 0.040"(1.02mm)diameter suffix letter"W" or "L" added to indicate lead


Polarity : Polarity symbols marked on body

Mounting Position : Bolt down on heat-sink with silicone thermal compound between bridge and mounting surface for max. heat transfer efficiency

Weight : 19 grams or 0.67 ounce

Mounting Torque : 20 in.-lb. max

GBPC-T

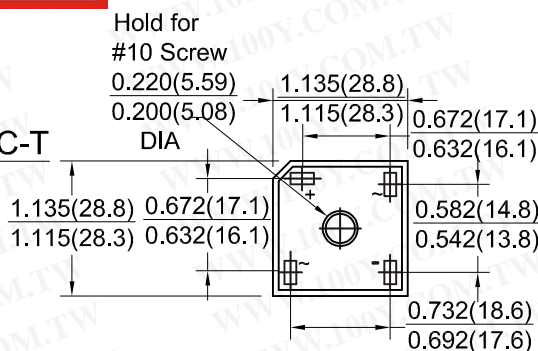

Dimensions in inches and (millimeters)

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Rating at 25° C ambient temp. unless otherwise specified.


Single phase, half sine wave, 60 Hz, resistive or inductive load.

For capacitive load, derate current by 20%.


Characteristic	Symbol	GBPC								Units
		50005 GT/W GBPC 50005G	5001 GT/W GBPC 5001G	5002 GT/W GBPC 5002G	5004 GT/W GBPC 5004G	5006 GT/W GBPC 5006G	5008 GT/W GBPC 5008G	5010 GT/W GBPC 5010G		
Maximum recurrent peak reverse voltage	V _{RRM}	50	100	200	400	600	800	1000	Volts	
Maximum RMS voltage	V _{RMS}	35	70	140	280	420	560	700	Volts	
Maximum DC blocking voltage	V _{DC}	50	100	200	400	600	800	1000	Volts	
Maximum average forward rectified current at TC=50° C	I _O	50.0								Amps
Peak forward surge current, single sine-wave on rated load(JEDEC Method)	I _{FSM}	400.0								Amps
Rating for fusing(1ms<tm<8.3ms)	I ² t	1200								A ² sec
Maximum instantaneous forward voltage drop per leg at 25A	V _F	1.2								Volts
Maximum DC reverse current at rated DC blocking voltage per leg Ta=25° C Ta=125° C	I _R	5.0 500								μ A
RMS isolated voltage from case to leads	V _{ISO}	2500								Volts
Typical junction capacitance	C _j	360								pF
Typical thermal resistance	R _{th-JC}	1.2								° C/W
Operating junction and storage temperature range	T _j , T _{stg}	-55 to +150								° C

Notes : 1. Measured 1MHz and applied reverse voltage of 4.0V DC

勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-54151736
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

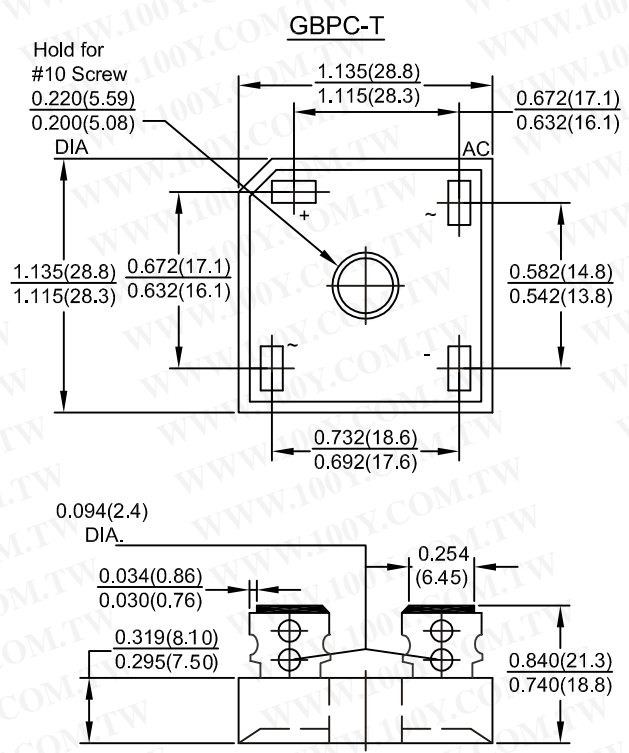

Dimensions in Inches and (millimeters)

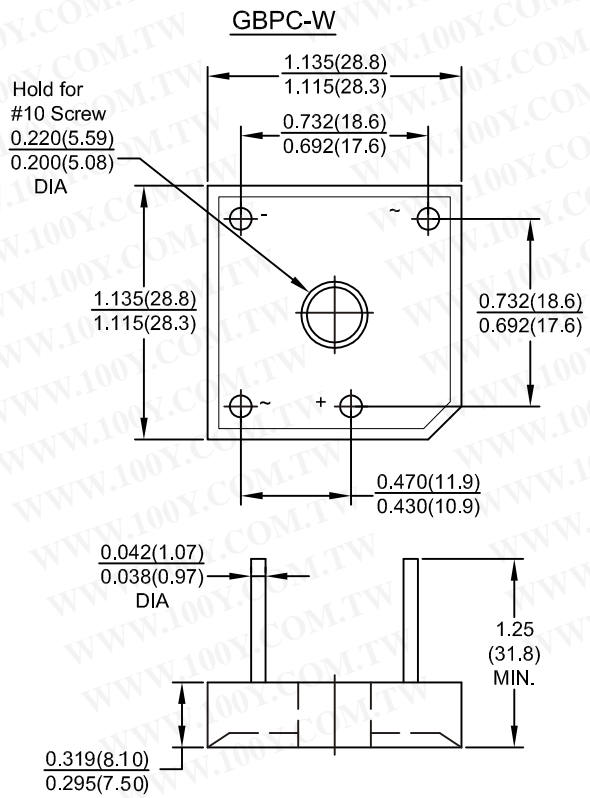

Dimensions in Inches and (millimeters)

FIG.1-MAXIMUM OUTPUT RECTIFIED CURRENT

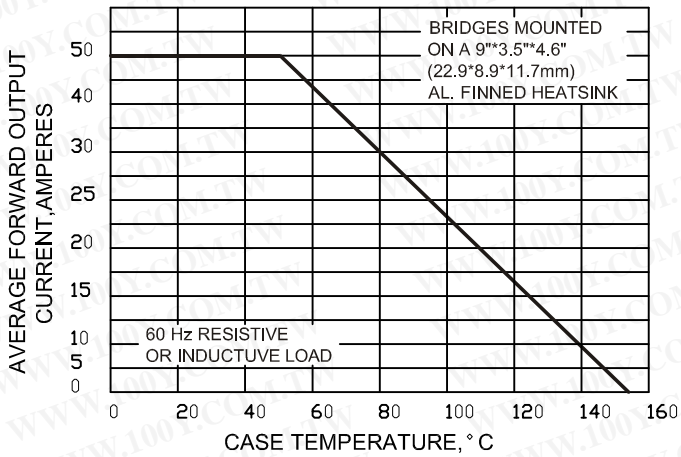


FIG.2-MAXIMUM OUTPUT RECTIFIED CURRENT


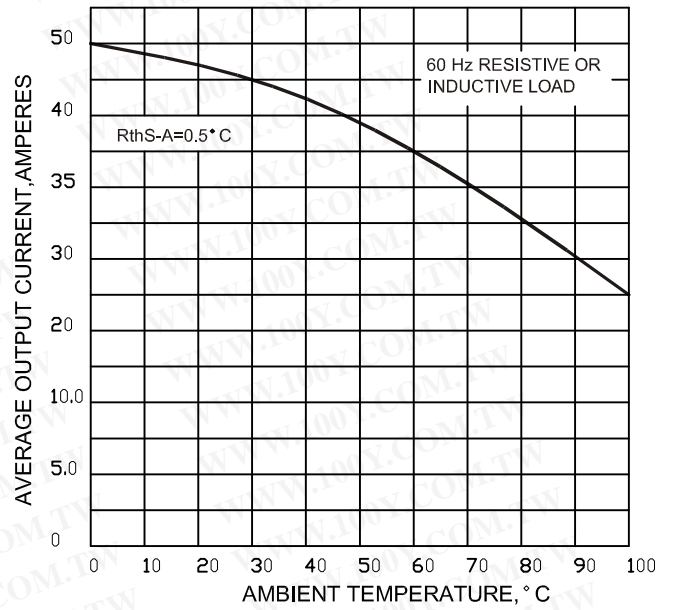


FIG.3-MAXIMUM POWER DISSIPATION

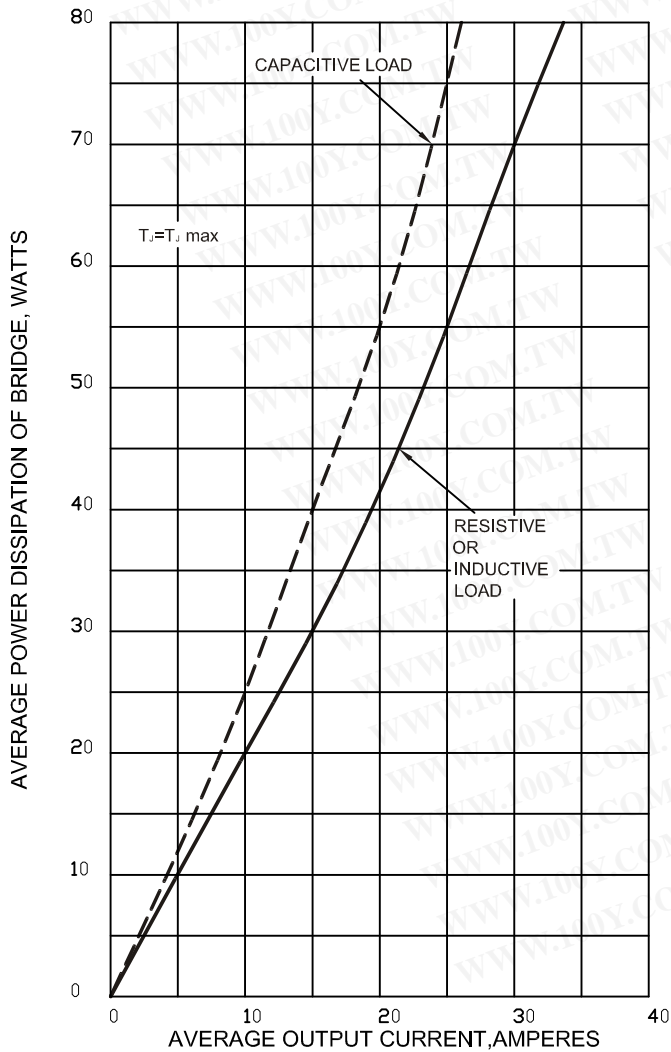

勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-54151736
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

FIG.4-MAXIMUM NON-REPEITIVE PEAK FORWARD


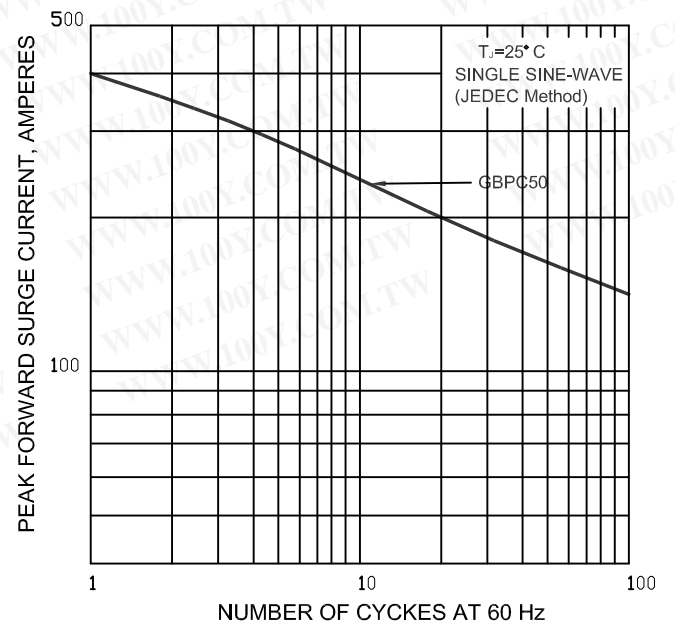


FIG.5-TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS PER LEG

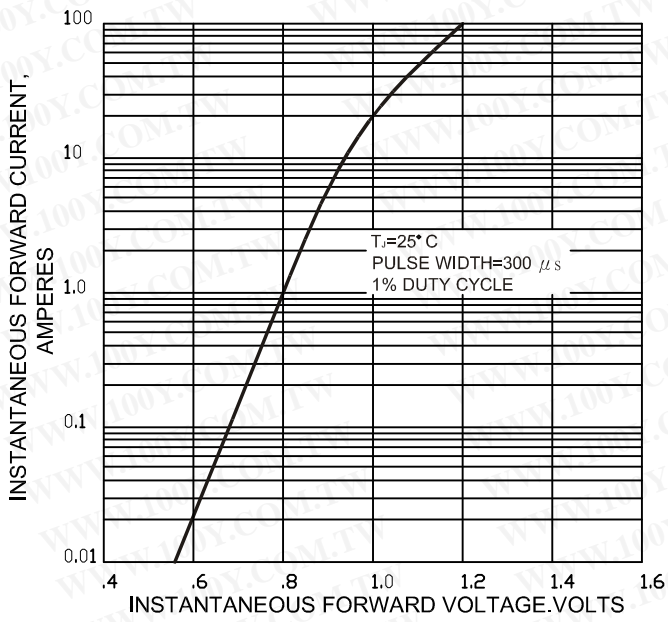

勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-54151736
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

FIG.6-TYPICAL REVERSE CHARACTERISTICS

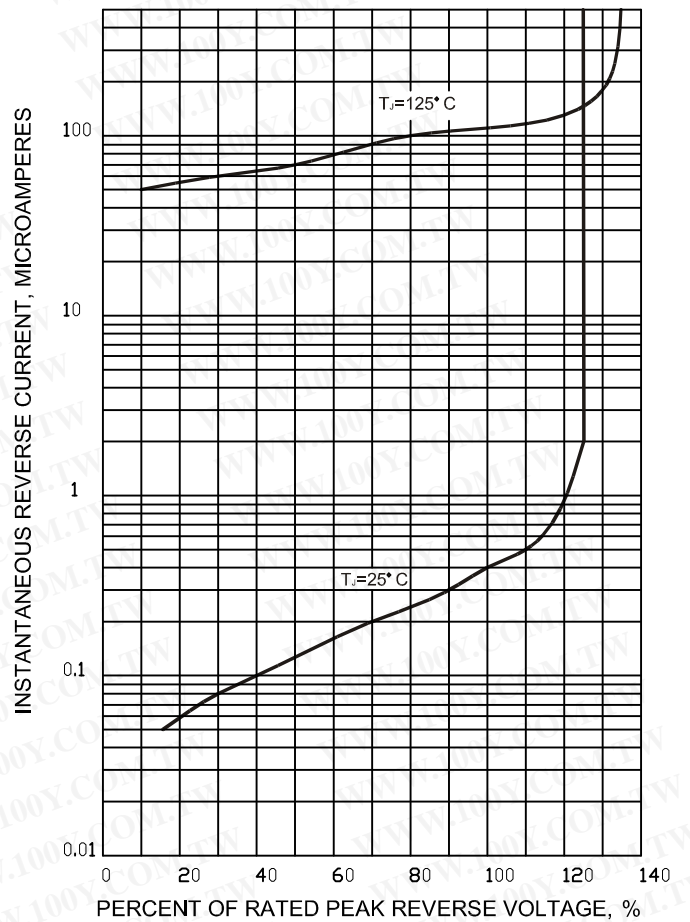


FIG.7-TYPICAL JUNCTION CAPACITANCE PER LEG

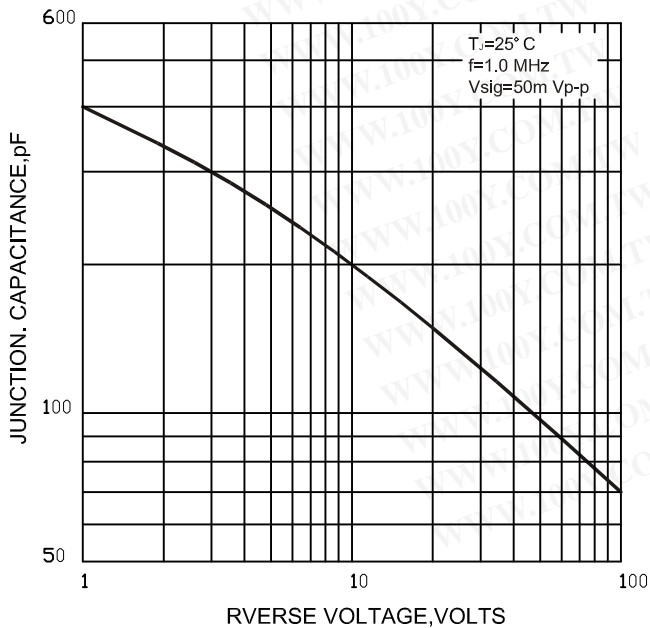


FIG.8-TYPICAL TRANSIENT THERMAL IMPEDANCE

