


AlarmFuses

GP Fuse

Normal blow

勝特力材料 886-3-5753170
勝特力电子(上海) 86-21-54151736
勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

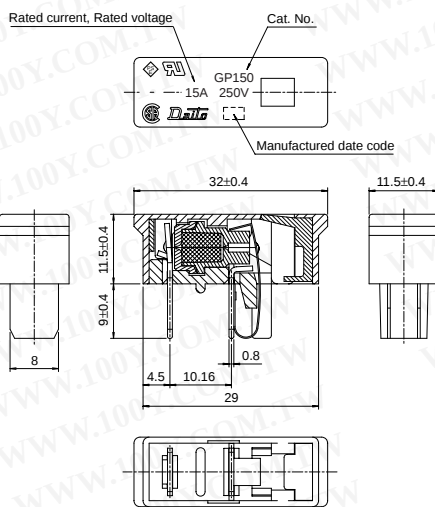


- Physical Size / Net Weight
32 × 11.5 × 20.5mm 6g
- Color
Dark Green
- Package
50Pcs/Box
- Applicable Fuseholders
GPH-4S, 4P, 4V, 2S, 2PD

Carrying Capacity	Clearing Time
110%	135% within 1 hour 200% within 2 minutes


Cat. No.	Rated Current	Breaking Capacity	Typ. Resistance*1
GP032	0.32A	AC/DC 250V 1,500A AC 125V 10,000A	2.95Ω
GP05	0.5A		1.74Ω
GP10	1A		0.70Ω
GP16	1.6A		0.41Ω
GP20	2A		83mΩ
GP25	2.5A		66mΩ
GP32	3.2A		46mΩ
GP40	4A	AC/DC 250V 750A	37mΩ
GP50	5A		29mΩ
GP75	7.5A		18mΩ
GP100	10A	AC 125V 10,000A	9mΩ
GP150	15A		5mΩ

*1 : at 10% max. of rated current

Clearing Characteristics

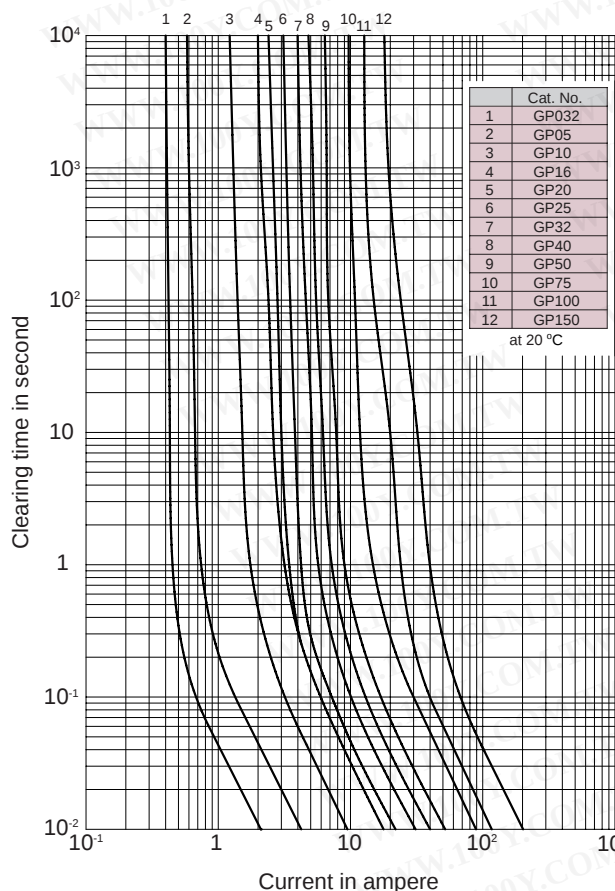

I²t-t Characteristics

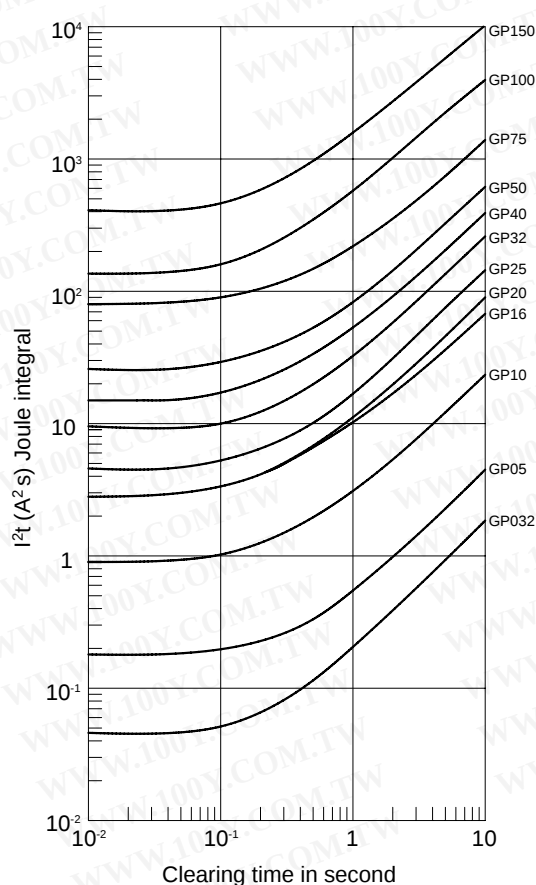

Information in this catalog may be subject to change without notice. Please confirm product information when ordering.

大東通信機株式会社
Daito Communication Apparatus Co., Ltd.

2-17-7, Shimomeguro, Meguro-ku, Tokyo 153-8671, Japan
Tel:+81-3-3495-6711 Fax:+81-3-3495-5722
Web <http://www.daitotusin.co.jp/> E-mail sales@daitotusin.co.jp