

H5C series

DIN 48X48 PRESET DIGITAL COUNTER

- ☆ DIN 48X48
- ☆ Up Counter or Down Counter Selectable.
- ☆ Decimal Point Selectable.
- ☆ Response Frequency : $H_i < 1K\text{ Hz}$, $L_o < 30\text{ Hz}$ Selectable.
- ☆ Output Control : Manual Reset or Auto Reset Selectable.
- ☆ Output Delay Time : $0.1S \sim 9.9\text{ S}$
- ☆ DC Output : $60\text{ mA} / 12\text{ VDC}$
- ☆ Switching Power Supply : $90 \sim 250\text{ VAC}$, $50 / 60\text{ Hz}$

勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-54151736
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)




Specification

Model	H5C - 4D
Power Supply	90~250 VAC 50/60 Hz
Wattage	5VA max.
DC Output	60 mV / 12 VDC
Memory Method	EEPROM or Non-Memory
Counting Method	UP or Down Counting
Response Freq.	$H_i < 1\text{ KHz}$, $L_o < 30\text{ Hz}$
Count Input	$H_i > 6V$, $L_o < 2V$
Reset Input	$H_i > 6V$, $L_o < 2V$
Output Method	Relay, 1a / 10A
Output Control	N or R Selectable
Decimal Point	0, 1 or 2 Selectable
Delay Timer	0.1~9.9 Sec
Insulation Strength	$100\text{ M } \Omega / 500\text{ VDC}$
Dielectric Strength	2.5K / 1 min.
Circumstance	$-20^{\circ} \sim +60^{\circ}\text{C}$, 35 ~ 85% RH

Output Timing Chart


Mode "N" Manual Reset

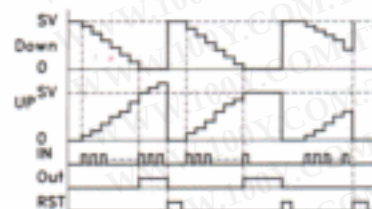

Mode "R" Auto Reset



Dimension

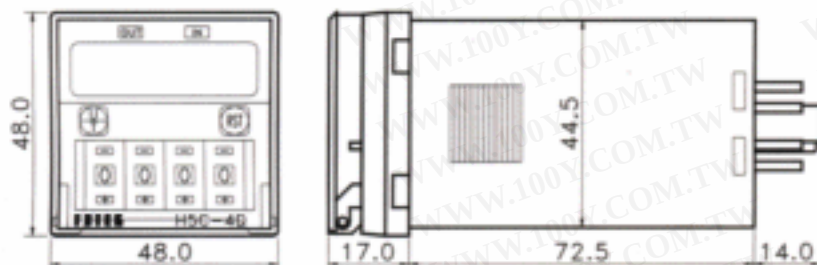

Connection Diagram

