

## MATERIAL


- Insulator : Polyester, UL 94V-0  
Standard : PBT
- Contacts : Brass
- Finish : Gold Plated Or Duplex Plated
- Standard : Gold Flash All Over

## SPECIFICATION

- Current Rating : 3Amps
- Insulation Resistance : 5000M $\Omega$  Min.
- Dielectric Withstanding : AC 1000V
- Operating Temperature : -40 $^{\circ}$ C ~ +105 $^{\circ}$ C



勝特力材料 886-3-5753170  
勝特力电子(上海) 86-21-54151736  
勝特力电子(深圳) 86-755-83298787  
[Http://www.100y.com.tw](http://www.100y.com.tw)

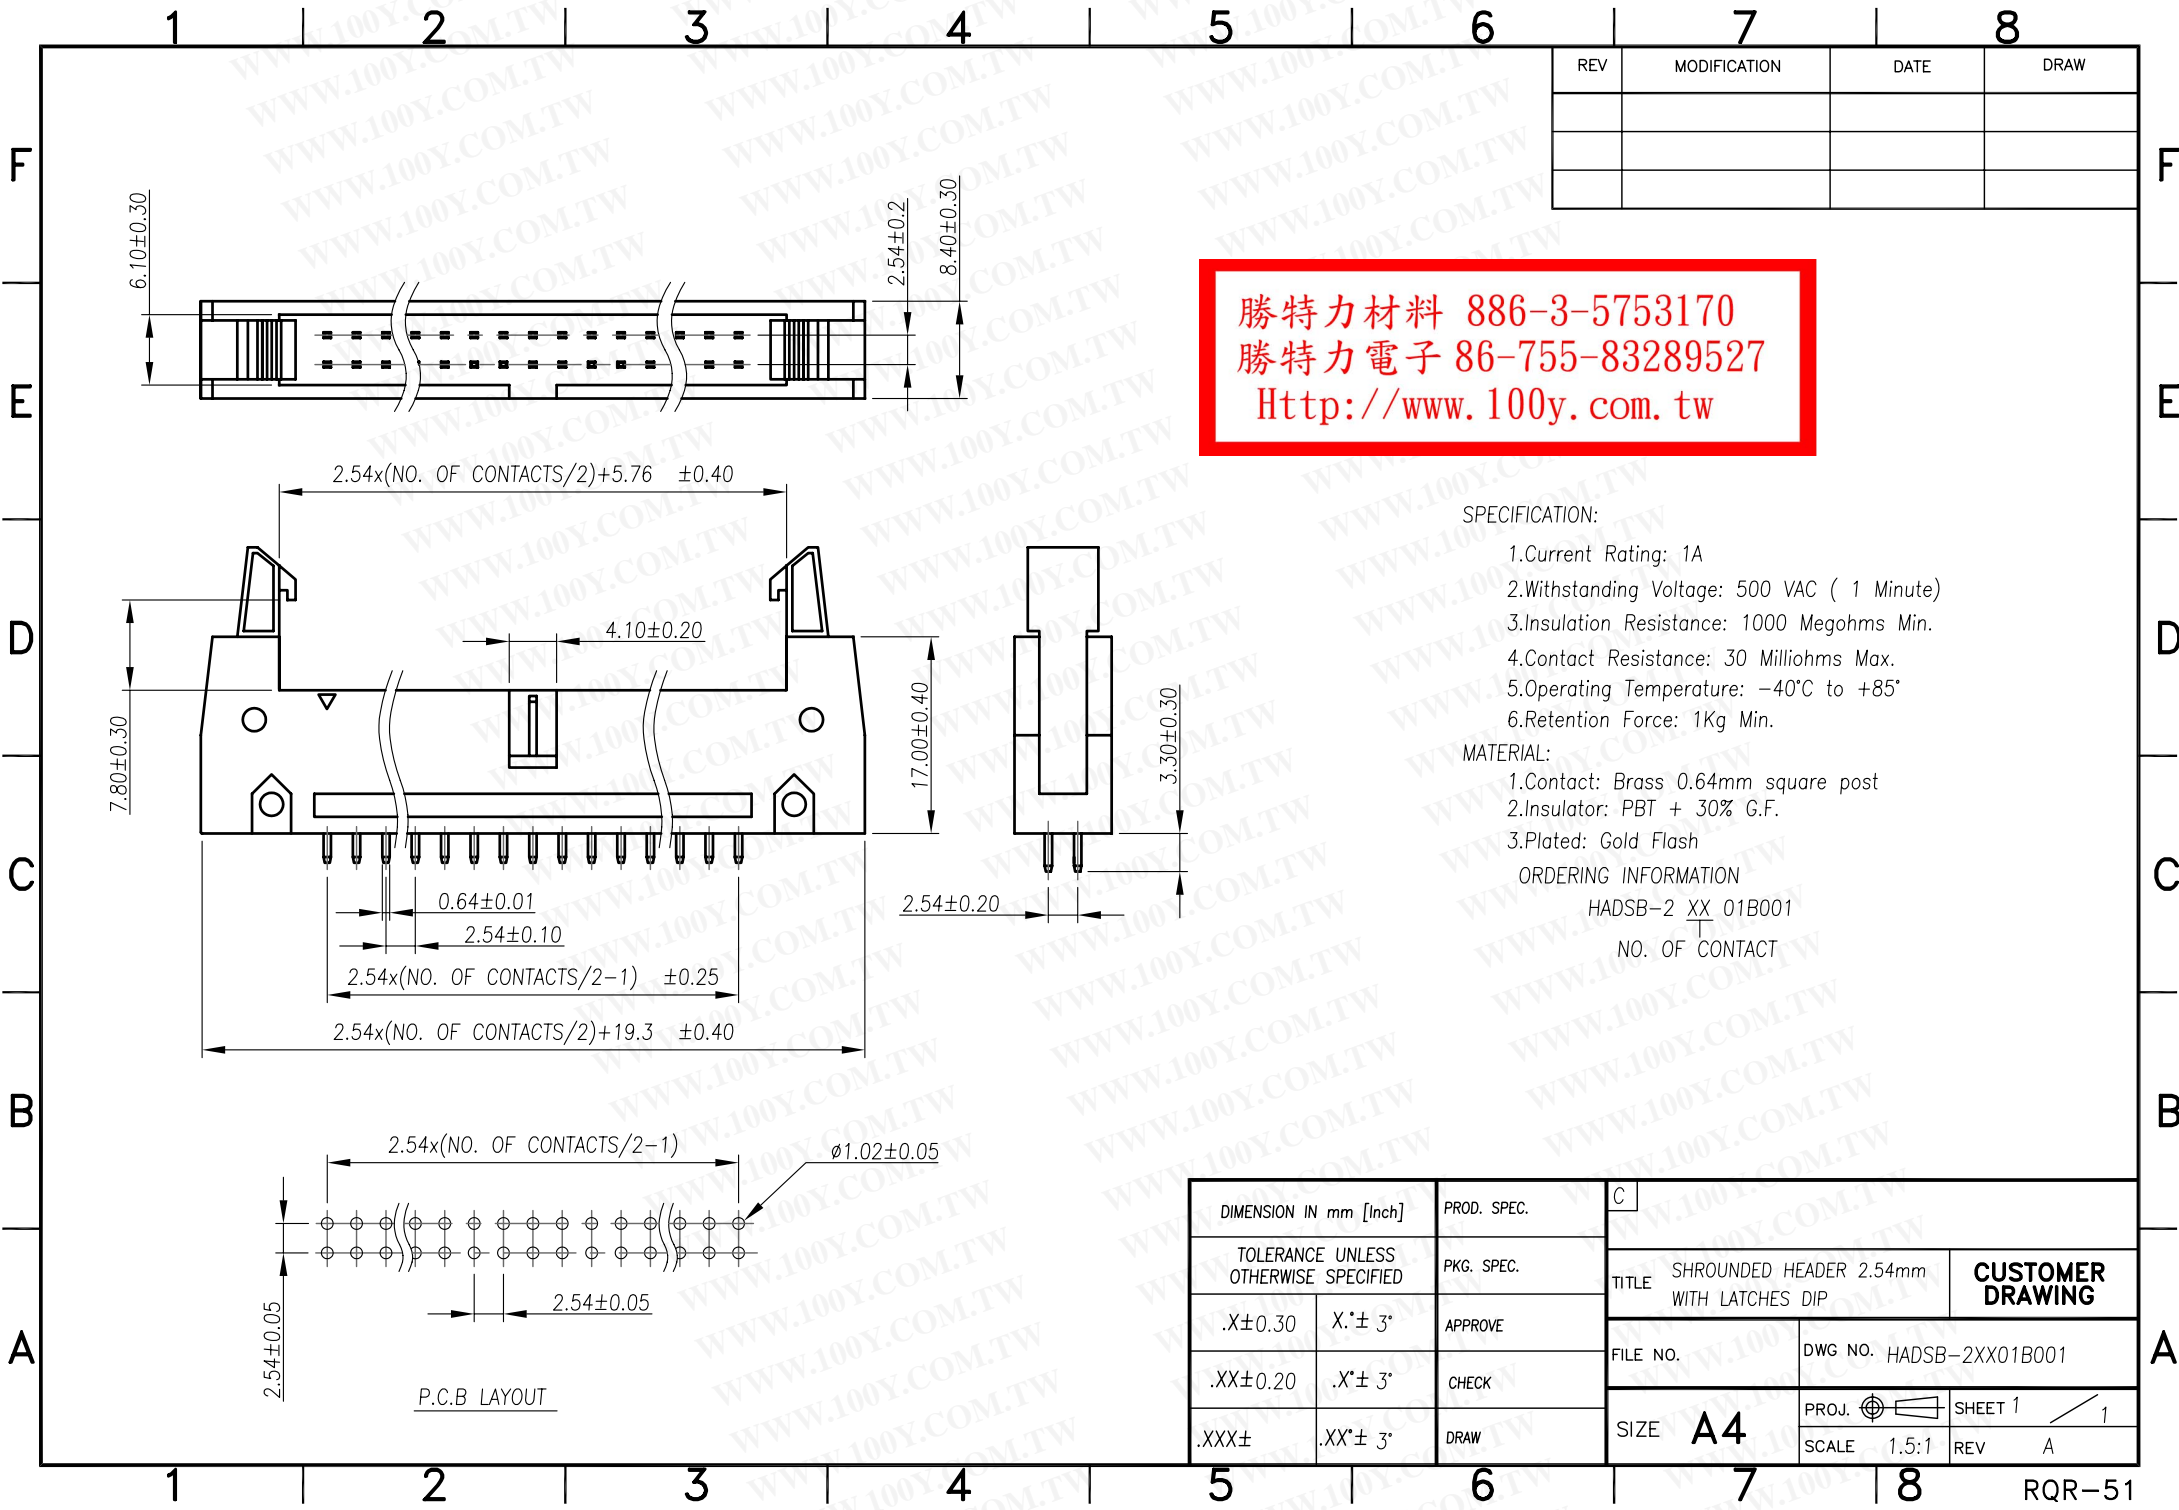

REV	MODIFICATION	DATE	DRAW

勝特力材料 886-3-5753170  
 勝特力電子 86-755-83289527  
[Http://www.100y.com.tw](http://www.100y.com.tw)

**SPECIFICATION:**

1. Current Rating: 1A
2. Withstanding Voltage: 500 VAC ( 1 Minute)
3. Insulation Resistance: 1000 Megohms Min.
4. Contact Resistance: 30 Milliohms Max.
5. Operating Temperature: -40°C to +85°
6. Retention Force: 1Kg Min.

**MATERIAL:**

1. Contact: Brass 0.64mm square post
2. Insulator: PBT + 30% G.F.
3. Plated: Gold Flash

**ORDERING INFORMATION**

HADSB-2 XX 01B001  
 NO. OF CONTACT

DIMENSION IN mm [Inch]		PROD. SPEC.	C
TOLERANCE UNLESS OTHERWISE SPECIFIED		PKG. SPEC.	
.X±0.30	X.*± 3"	APPROVE	TITLE SHROUNDED HEADER 2.54mm WITH LATCHES DIP <b>CUSTOMER DRAWING</b>
.XX±0.20	.X.*± 3"	CHECK	
.XXX±	.XX.*± 3"	DRAW	FILE NO.
			DWG NO. HADSB-2XX01B001
			PROJ.  SHEET 1 / 1
			SCALE 1.5:1 REV A
			SIZE <b>A4</b>