


Photo IC diode

S9066-01, S9067-01, S9363

Spectral response close to human eye sensitivity

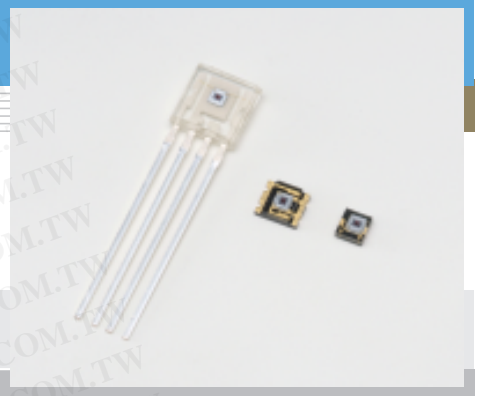

S9066-01, S9067-01 and S9363 photo ICs have spectral response close to human eye sensitivity. Two active areas are made on a single chip. One is for detecting light in the visible to near infrared range and the other is only sensitive to near infrared light and used for output signal correction. Almost only the visible range can be measured by finding the difference between the two output signals in the internal current amplifier circuit. Compared to previously available devices, these photo ICs offer lower output fluctuations for light sources producing the same illuminance at different color temperatures.

Features

- Spectral response close to human eye sensitivity is attained without using visual-compensated filter.
- Operation just as easy to use as a photodiode
- Large output current equivalent to phototransistors
- Lower output-current fluctuations
- Excellent linearity
- Low output fluctuations for light sources producing the same illuminance at different color temperatures
- Compact and thin package: $2.0 \times 2.1 \times 0.9^{\dagger}$ mm

Applications

- Energy-saving sensor for TVs, etc.
- Light dimmers for liquid crystal panels
- Cellular phone backlight dimmers
- Various types of light level measurement

■ Absolute maximum ratings (Ta=25 °C)

Parameter	Symbol	S9066-01	S9067-01	S9363	Unit
Reverse voltage	VR		-0.5 to 16		V
Photocurrent	IL		10		mA
Forward current	IF		10		mA
Power dissipation *1	P	250	150	150	mW
Operating temperature	Topr		-30 to +80		°C
Storage temperature	Tstg		-40 to +85		°C


*1: Derate power dissipation at a rate of the following rate above Ta=25 °C.

S9066-01: -3.3 mW/°C, S9067-01, S9363: -2.0 mW/°C

■ Electrical and optical characteristics (Ta=25 °C)

Parameter	Symbol	Condition	S9066-01			S9067-01			S9363			Unit
			Min.	Typ.	Max.	Min.	Typ.	Max.	Min.	Typ.	Max.	
Spectral response range	λ		320 to 820			320 to 820			320 to 820			nm
Peak sensitivity wavelength	λ_p		-	560	-	-	560	-	-	560	-	nm
Dark current	ID	VR=5 V	-	1.0	50	-	1.0	50	-	1.0	50	nA
Photocurrent	IL	VR=5 V, 2856 K, 100 lx	-	0.37	-	-	0.3	-	-	0.29	-	mA
Rise time *2	tr	10 to 90 %, VR=5 V	-	6.0	-	-	6.0	-	-	6.0	-	ms
Fall time *2	tf	RL=10 k Ω , λ =560 nm	-	2.5	-	-	2.5	-	-	2.5	-	ms

*2: Rise/fall time measurement method

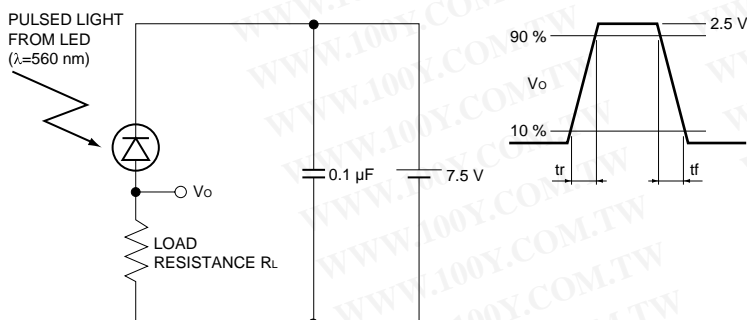

KPIC0041EA

勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-54151736
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

