


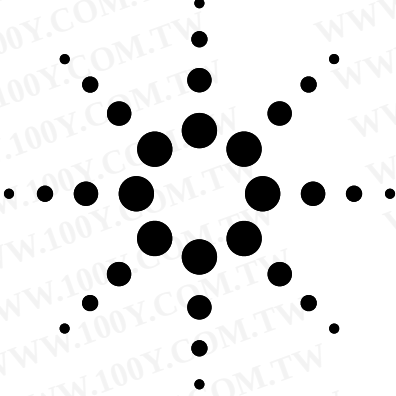

Agilent T-1³/₄ Super Ultra-Bright LED Lamps Data Sheet

勝特力材料 886-3-5753170
胜特力电子(上海) 86-21-54151736
胜特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

HLMP-C115, HLMP-C117, HLMP-C123, HLMP-C215, HLMP-C223,
HLMP-C315, HLMP-C323, HLMP-C415, HLMP-C423, HLMP-C515,
HLMP-C523, HLMP-C615, HLMP-C623

Description

These non-diffused lamps are designed to produce a bright light source and smooth radiation pattern. A slight tint is added to the lens for easy color identification. This lamp has been designed with a

20 mil lead frame, enhanced flange, and tight meniscus controls, making it compatible with radial lead automated insertion equipment.

Features

- Very high intensity
- Exceptional uniformity
- Microtint lens for color identification
- Consistent viewability

All colors:

AlGaAs Red
High Efficiency Red
Yellow
Orange
Green
Emerald Green

- 15° and 25° family
- Tape and reel options available
- Binned for color and intensity

Applications

- Ideal for backlighting front panels*
- Used for lighting switches
- Adapted for indoor and outdoor signs



Agilent Technologies

Selection Guide

Color	201/2[1]	Standoff Leads	Part Number HLMP-	Luminous Intensity Iv (mcd)	
				Min.	Max.
DH AS AlGaAs	15	No	C115	290.0	—
			C115-000xx	290.0	—
			C115-OP0xx	290.0	1000.0
	25	Yes	C117-OP0xx	290.0	1000.0
		No	C123	90.2	—
Red	15	No	C123-L00xx	90.2	—
			C215	138.0	—
			C215-M00xx	138.0	—
	25	No	C215-MN0xx	138.0	400.0
			C223	90.2	—
			C223-L00xx	90.2	—
			C223-MN0xx	138.0	400.0
Yellow	15	No	C315	147.0	—
			C315-L00xx	147.0	—
			C315-LM0xx	147.0	424.0
	25	No	C323	96.2	—
			C323-K00xx	96.2	—
			C323-KL0xx	96.2	294.0
Orange	15	No	C415	138.0	—
			C415-M00xx	138.0	—
			C415-M0D0xx	138.0	—
	25	No	C415-MN0xx	138.0	400.0
			C423	90.2	—
			C423-L00xx	90.2	—
Green	15	No	C423-LM0xx	90.2	276.0
			C515	170.0	—
			C515-L00xx	170.0	—
	25	No	C515-LM0xx	170.0	490.0
			C523	69.8	—
			C523-J00xx	69.8	—
Emerald Green	15	No	C523-KL0xx	111.7	340.0
			C615	17.0	—
			C615-G00xx	17.0	—
	25	No	C623	6.7	—
			C623-E00xx	6.7	—

Part Numbering System

HLMP - C x xx - x x x xx

Mechanical Options

- 00: Bulk
- 01: Tape & Reel, Crimped Leads
- 02: Tape & Reel, Straight Leads
- B2: Right Angle Housing, Even Leads
- UQ: Ammo Pack, Horizontal Leads

Color Bin Options

- 0: Full Color Bin Distribution
- D: Color Bins 4 & 5 only

Maximum Iv Bin Options

- 0: Open (No Maximum Limit)
- Others: Please refer to the Iv Bin Table

Minimum Iv Bin Options

- Please refer to the Iv Bin Table

Viewing Angle & Standoffs Options

- 15: 15 Degree, without Standoffs
- 17: 15 Degree, with Standoffs
- 23: 25 Degree, without Standoffs


Color Options

- 1. AS AlGaAs Red
- 2. High Efficiency Red
- 3. Yellow
- 4. Orange
- 5. Green
- 6. Emerald Green

Package Options

- C: T-1 3/4 (5 mm)

Package Dimensions

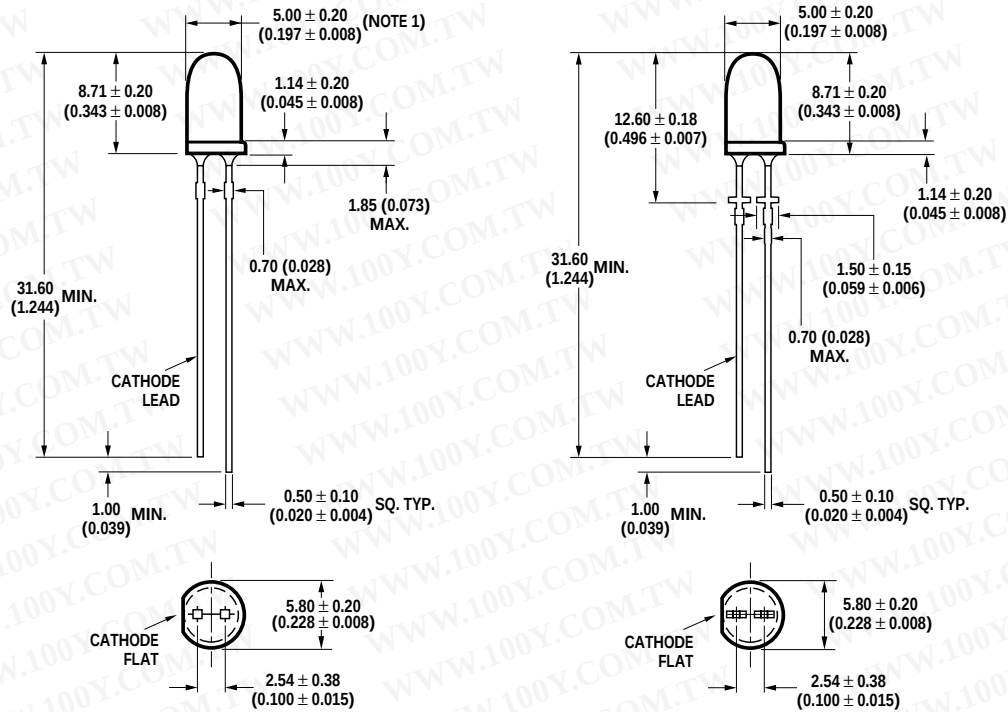

NOTES:

- ALL DIMENSIONS ARE IN MILLIMETERS (INCHES).
- LEADS ARE MILD STEEL, SOLDER DIPPED.
- AN EPOXY MENISCUS MAY EXTEND ABOUT 0.5 mm (0.020 in.) DOWN THE LEADS.

HLMP-Cx15 and HLMP-Cx23

HLMP-Cx17

Absolute Maximum Ratings at $T_A = 25^\circ\text{C}$

Parameter	DH AS AlGaAs Red	High Efficiency Red and Orange	Yellow	High Performance Green and Emerald Green	Units
DC Forward Current ^[1]	30	30	20	30	mA
Transient Forward Current ^[2] (10 μsec Pulse)	500	500	500	500	mA
Reverse Voltage ($I_r = 100 \mu\text{A}$)	5	5	5	5	V
LED Junction Temperature	110	110	110	110	$^\circ\text{C}$
Operating Temperature Range	-20 to +100	-55 to +100	-55 to +100	-20 to +100	$^\circ\text{C}$
Storage Temperature Range		-55 to +100			$^\circ\text{C}$
Wave Soldering Temperature [1.59 mm (0.063 in.) from body]	250 $^\circ\text{C}$ for 3 seconds				
Lead Solder Dipping Temperature [1.59 mm (0.063 in.) from body]	260 $^\circ\text{C}$ for 5 seconds				

Notes:

- See Figure 5 for maximum current derating vs. ambient temperature.
- The transient current is the maximum nonrecurring peak current the device can withstand without damaging the LED die and wire bond.

Electrical Characteristics at $T_A = 25^\circ\text{C}$

Part Number	Forward Voltage V_f (Volts) @ $I_f = 20\text{ mA}$		Reverse Breakdown V_r (Volts) @ $I_r = 100\text{ }\mu\text{A}$	Capacitance C (pF) $V_f = 0$ $f = 1\text{ MHz}$	Thermal Resistance $R\theta_{J-PIN}$ ($^\circ\text{C/W}$)	Speed of Response τ_s (ns) Time Constant e^{-t/τ_s}
	Typ.	Max.				
HLMP-C115	1.8	2.2	5	30	210	30
HLMP-C117						
HLMP-C123						
HLMP-C215	1.9	2.6	5	11	210	90
HLMP-C223						
HLMP-C315	2.1	2.6	5	15	210	90
HLMP-C323						
HLMP-C415	1.9	2.6	5	4	210	280
HLMP-C423						
HLMP-C515	2.2	3.0	5	18	210	260
HLMP-C523						
HLMP-C615	2.2	3.0	5	18	210	260
HLMP-C623						

Optical Characteristics at $T_A = 25^\circ\text{C}$

Part Number	Luminous Intensity I_v (mcd) @ 20 mA [1]		Peak Wavelength λ_{peak} (nm) Typ.	Color, Dominant Wavelength λ_d [2] (nm) Typ.	Viewing Angle $2\theta_{1/2}$ (Degrees)[3] Typ.	Luminous Efficacy η_v (lm/w)
	Min.	Typ.				
HLMP-C115	290	600	645	637	11	80
HLMP-C117						
HLMP-C123	90	200			26	
HLMP-C215	138	300	635	626	17	145
	90	170			23	
HLMP-C315	146	300	583	585	17	500
	96	170			25	
HLMP-C415	138	300	600	602	17	380
	90	170			23	
HLMP-C515	170	300	568	570	20	595
	69	170			28	
HLMP-C615	17	45	558	560	20	656
	6	27			28	

Notes:

1. The luminous intensity, I_v , is measured at the mechanical axis of the lamp package. The actual peak of the spatial radiation pattern may not be aligned with this axis.
2. The dominant wavelength, λ_d , is derived from the CIE Chromaticity Diagram and represents the color of the device.
3. $2\theta_{1/2}$ is the off-axis angle where the luminous intensity is 1/2 the on-axis intensity.

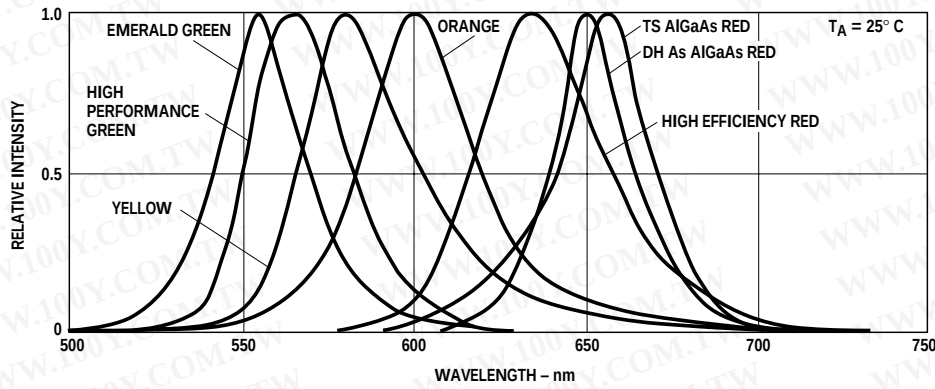


Figure 1. Relative intensity vs. wavelength.

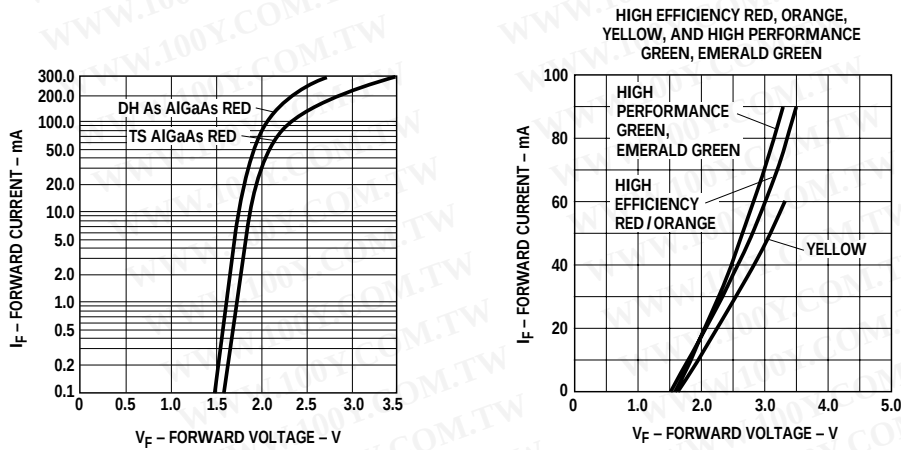


Figure 2. Forward current vs. forward voltage (non-resistor lamp).

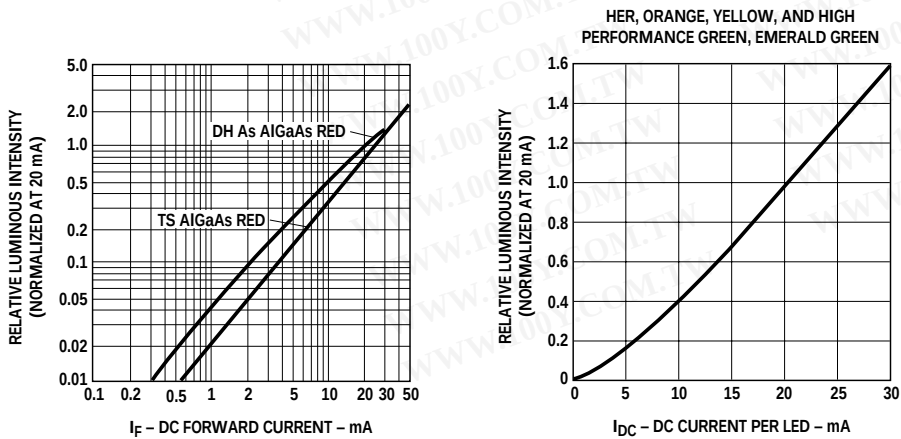


Figure 3. Relative luminous intensity vs. forward current.

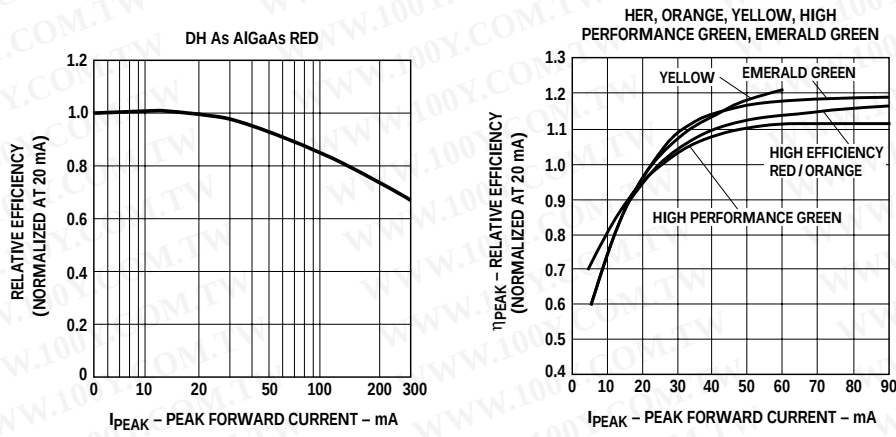


Figure 4. Relative efficiency (luminous intensity per unit current) vs. peak current.

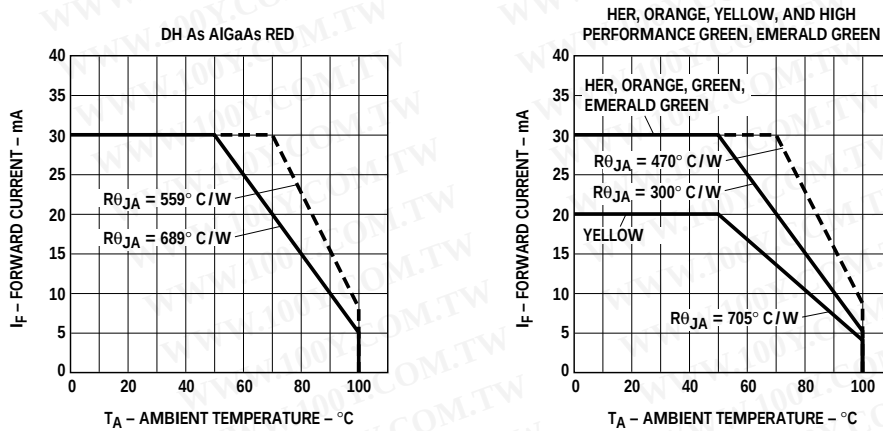


Figure 5. Maximum forward dc current vs. ambient temperature. Derating based on $T_{jMAX} = 110^\circ \text{C}$.

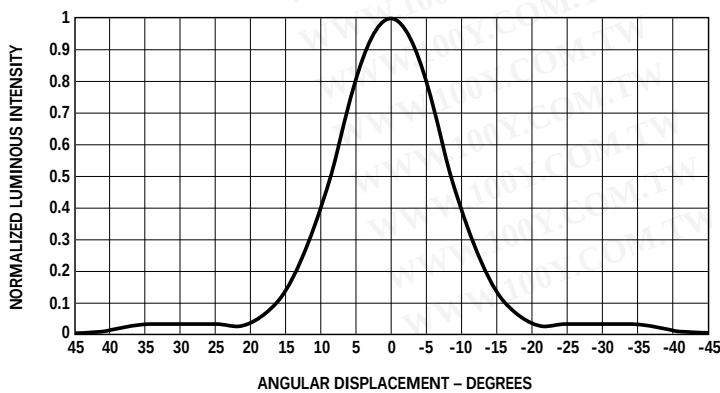


Figure 6. Relative luminous intensity vs. angular displacement. 15 degree family.

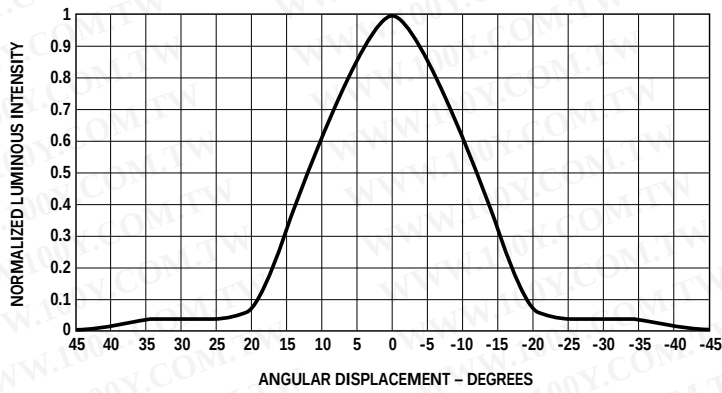


Figure 7. Relative luminous intensity vs. angular displacement. 25 degree family.

Intensity Bin Limits

Color	Bin	Intensity Range (mcd)	
		Min.	Max.
Red/Orange	L	101.5	162.4
	M	162.4	234.6
	N	234.6	340.0
	O	340.0	540.0
	P	540.0	850.0
	Q	850.0	1200.0
	R	1200.0	1700.0
	S	1700.0	2400.0
	T	2400.0	3400.0
	U	3400.0	4900.0
	V	4900.0	7100.0
	W	7100.0	10200.0
	X	10200.0	14800.0
Yellow	Y	14800.0	21400.0
	Z	21400.0	30900.0
	L	173.2	250.0
	M	250.0	360.0
	N	360.0	510.0
	O	510.0	800.0
	P	800.0	1250.0
	Q	1250.0	1800.0
	R	1800.0	2900.0
	S	2900.0	4700.0
	T	4700.0	7200.0
	U	7200.0	11700.0
	V	11700.0	18000.0
	W	18000.0	27000.0

Intensity Bin Limits, continued

Color	Bin	Intensity Range (mcd)	
		Min.	Max.
Green/ Emerald Green	E	7.6	12.0
	F	12.0	19.1
	G	19.1	30.7
	H	30.7	49.1
	I	49.1	78.5
	J	78.5	125.7
	K	125.7	201.1
	L	201.1	289.0
	M	289.0	417.0
	N	417.0	680.0
	O	680.0	1100.0
	P	1100.0	1800.0
	Q	1800.0	2700.0
	R	2700.0	4300.0
	S	4300.0	6800.0
	T	6800.0	10800.0
	U	10800.0	16000.0
	V	16000.0	25000.0
	W	25000.0	40000.0

Maximum tolerance for each bin limit is $\pm 18\%$.

Color Categories

Color	Category #	Lambda (nm)	
		Min.	Max.
Green	6	561.5	564.5
	5	564.5	567.5
	4	567.5	570.5
	3	570.5	573.5
	2	573.5	576.5
Yellow	1	582.0	584.5
	3	584.5	587.0
	2	587.0	589.5
	4	589.5	592.0
	5	592.0	593.0
Orange	1	597.0	599.5
	2	599.5	602.0
	3	602.0	604.5
	4	604.5	607.5
	5	607.5	610.5
	6	610.5	613.5
	7	613.5	616.5
	8	616.5	619.5

Tolerance for each bin limit is ± 0.5 nm.

Mechanical Option Matrix

Mechanical Option Code	Definition
00	Bulk Packaging, minimum increment 500 pcs/bag
01	Tape & Reel, crimped leads, minimum increment 1300 pcs/bag
02	Tape & Reel, straight leads, minimum increment 1300 pcs/bag
B2	Right Angle Housing, even leads, minimum increment 500 pcs/bag
UQ	Ammo Pack, horizontal leads, in 1K minimum increment

Note:

All categories are established for classification of products. Products may not be available in all categories. Please contact your local Agilent representative for further clarification/information.

www.agilent.com/semiconductors

For product information and a complete list of distributors, please go to our web site.

For technical assistance call:

Americas/ Canada: +1 (800) 235-0312 or
(916) 788-6763

Europe: +49 (0) 6441 92460

China: 10800 650 0017

Hong Kong: (+65) 6756 2394

India, Australia, New Zealand: (+65) 6755 1939

Japan: (+81 3) 3335-8152 (Domestic/International), or 0120-61-1280 (Domestic Only)

Korea: (+65) 6755 1989

Singapore, Malaysia, Vietnam, Thailand,
Philippines, Indonesia: (+65) 6755 2044

Taiwan: (+65) 6755 1843

Data subject to change.

Copyright © 2004 Agilent Technologies, Inc.

Obsoletes 5965-6165E

November 11, 2004

5988-2149EN



Agilent Technologies