


Micro Fuses

HM Fuse

Normal blow



- Physical Size · Net Weight
10 × 6 × 10mm 0.7g
- Color
Transparent body type
- Package
50Pcs/Stick
- Applicable Fuseholders
HM1H
HM2H

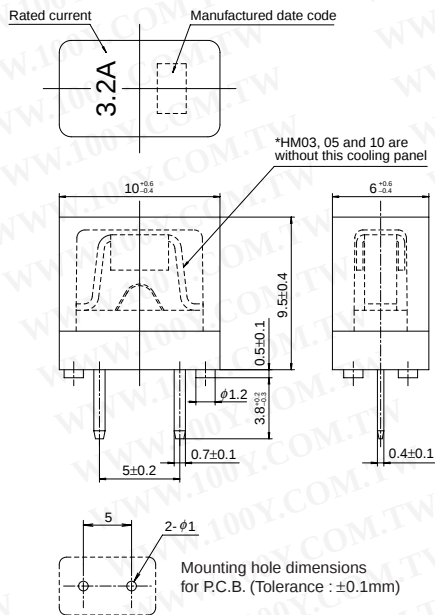


Cat. No.	Rated Current	Breaking Capacity	Typ. Resistance*1
HM03	0.3A	AC/DC 250V 50A	0.79Ω
HM05	0.5A		0.42Ω
HM10	1A		0.17Ω
HM16	1.6A		88mΩ
HM20	2A		67mΩ
HM32	3.2A		36mΩ
HM50	5A		21mΩ

*1 : at 10% max. of rated current

Carrying Capacity	Clearing Time
100%	150% within 10 minutes (except HM50) 200% within 5 seconds

勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-54151736
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

Clearing Characteristics

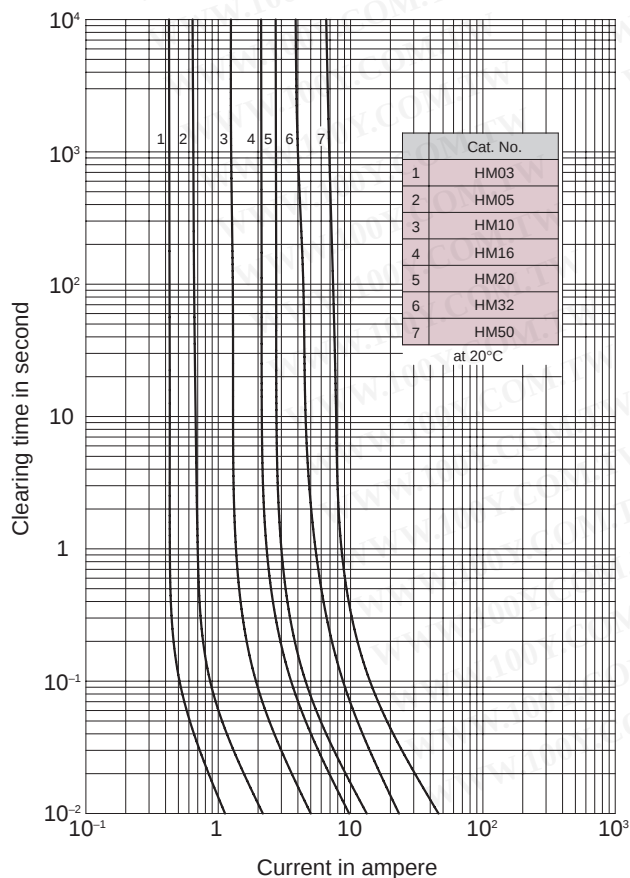

I²t-t Characteristics

