




HMBD914

HIGH-SPEED SWITCHING DIODE

Description

The HMBD914 is designed for high-speed switching application in hybrid thick-and thin-film circuits. The device is manufactured by the silicon epitaxial planar process and packed in plastic surface mount package.



SOT-23

Features

- Small SMD Package (SOT-23)
- Ultra-high Speed
- Low Forward Voltage
- Fast Reverse Recovery Time

勝特力材料 886-3-5753170
勝特力电子(上海) 86-21-54151736
勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

Absolute Maximum Ratings



- Maximum Temperatures
Storage Temperature -65 ~ +150 °C
Junction Temperature +150 °C
- Maximum Power Dissipation
Total Power Dissipation (Ta=25°C) 250 mW
- Maximum Voltages and Currents (Ta=25°C)
Repetitive Peak Reverse Voltage 85 V
VR Coinuous Reverse Voltage 70 V
IF Continuous Forward Current 200 mA
IFSM Peak Forward Surge Current 500 mA
IFSM Non-Repetitive Peak Forward Current t=1uS 4 A
IFSM Non-Repetitive Peak Forward Current t=1mS 1 A
IFSM Non-Repetitive Peak Forward Current t=1S 0.5 A

Characteristics (Ta=25°C)

Characteristic	Symbol	Condition	Min	Max	Unit
Forward Voltage	VF	IF=10mA	-	1	V
Reverse Breakdown Voltage	VR	IR=100uA	100		V
Reverse Current	IR(1)	VR=25V	-	25	nA
	IR(2)	VR=75V	-	5	uA
Diode Capacitance	Cd	VR=0, F=1MHz	-	1.5	pF
Reverse Recovery Time	Trr	IF=IR=10mA, RL=100Ω Measured at IR=1mA	-	4	ns




Characteristics Curve

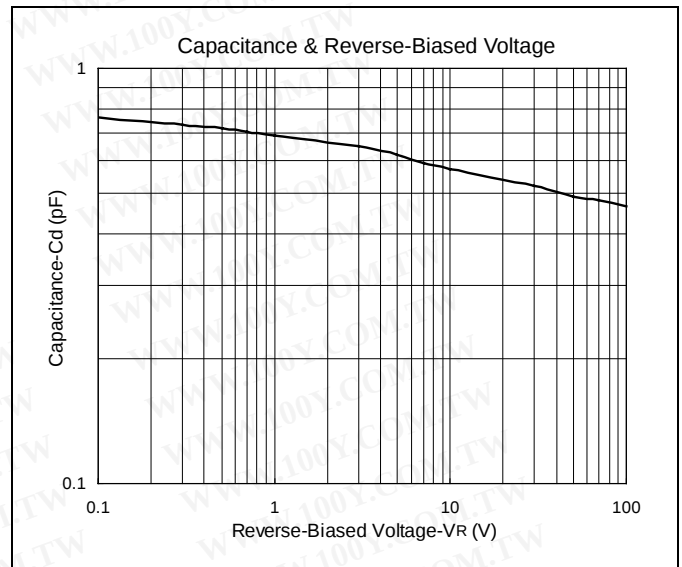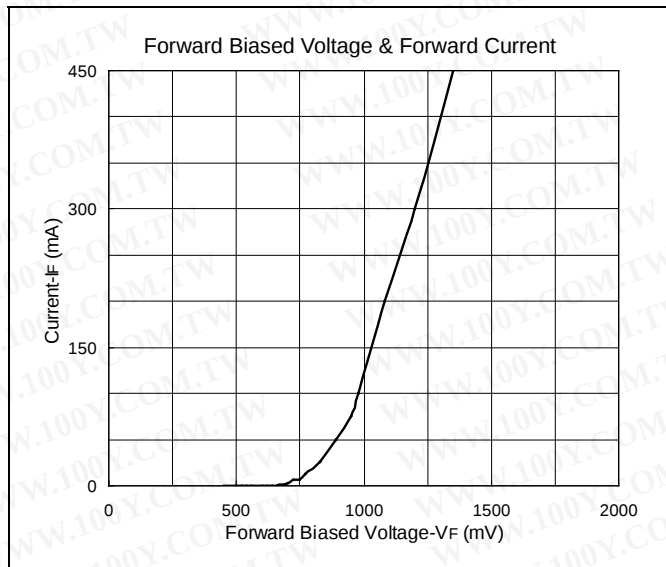

勝特力材料 886-3-5753170
勝特力电子(上海) 86-21-54151736
勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)



SOT-23 Dimension

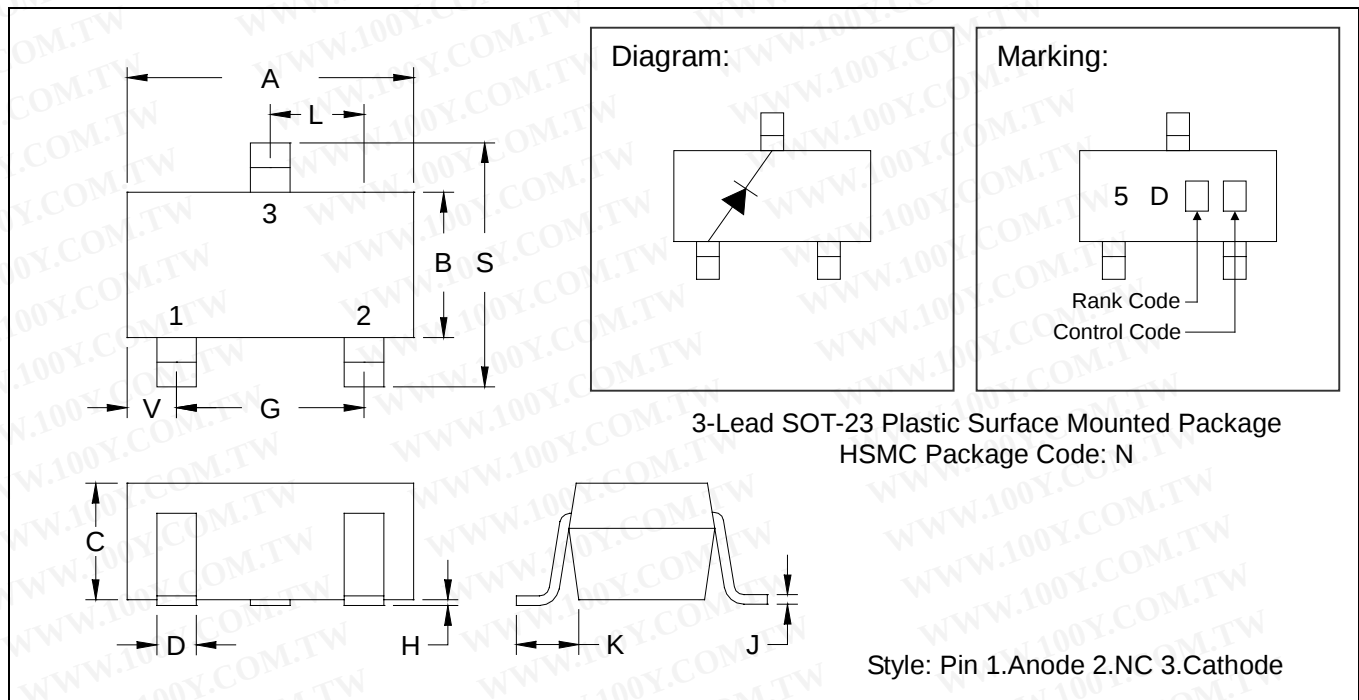

*: Typical

DIM	Inches		Millimeters		DIM	Inches		Millimeters	
	Min.	Max.	Min.	Max.		Min.	Max.	Min.	Max.
A	0.1102	0.1204	2.80	3.04	J	0.0034	0.0070	0.085	0.177
B	0.0472	0.0630	1.20	1.60	K	0.0128	0.0266	0.32	0.67
C	0.0335	0.0512	0.89	1.30	L	0.0335	0.0453	0.85	1.15
D	0.0118	0.0197	0.30	0.50	S	0.0830	0.1083	2.10	2.75
G	0.0669	0.0910	1.70	2.30	V	0.0098	0.0256	0.25	0.65
H	0.0005	0.0040	0.013	0.10					

Notes: 1.Dimension and tolerance based on our Spec. dated Sep. 07,1997.

2.Controlling dimension: millimeters.

3.Maximum lead thickness includes lead finish thickness, and minimum lead thickness is the minimum thickness of base material.

4.If there is any question with packing specification or packing method, please contact your local HSMC sales office.

Material:

- Lead: 42 Alloy; solder plating
- Mold Compound: Epoxy resin family, flammability solid burning class: UL94V-0

Important Notice:

- All rights are reserved. Reproduction in whole or in part is prohibited without the prior written approval of HSMC.
- HSMC reserves the right to make changes to its products without notice.
- HSMC semiconductor products are not warranted to be suitable for use in Life-Support Applications, or systems.**
- HSMC assumes no liability for any consequence of customer product design, infringement of patents, or application assistance.

Head Office And Factory:

- Head Office** (Hi-Sincerity Microelectronics Corp.): 10F., No. 61, Sec. 2, Chung-Shan N. Rd. Taipei Taiwan R.O.C.
Tel: 886-2-25212056 Fax: 886-2-25632712, 25368454
- Factory 1:** No. 38, Kuang Fu S. Rd., Fu-Kou Hsin-Chu Industrial Park Hsin-Chu Taiwan. R.O.C
Tel: 886-3-5983621~5 Fax: 886-3-5982931

勝特力材料 886-3-5753170
勝特力电子(上海) 86-21-54151736
勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)