


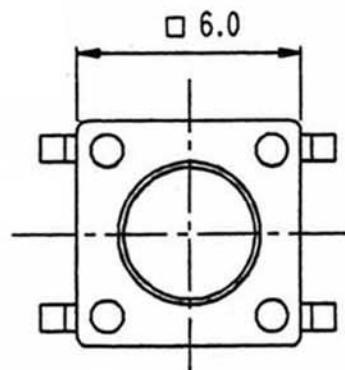
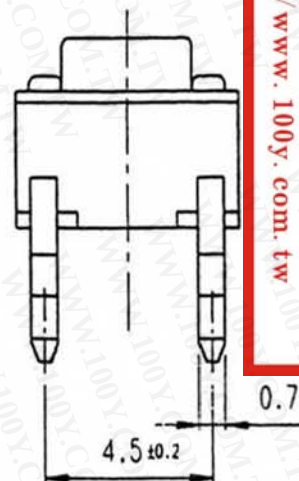


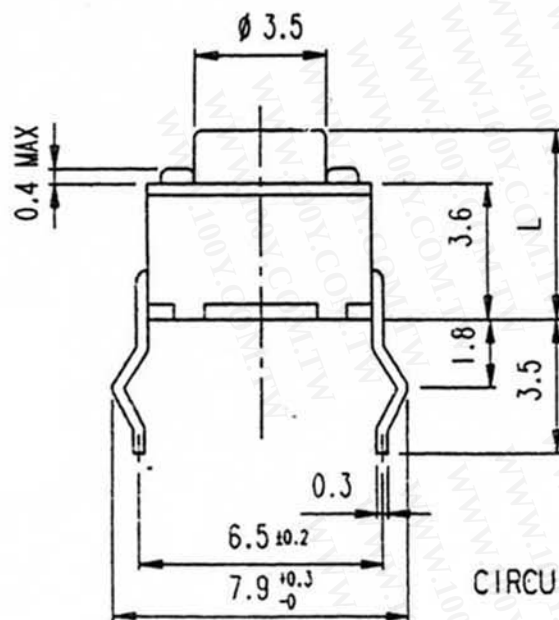

P.C.B DIMENSIONS

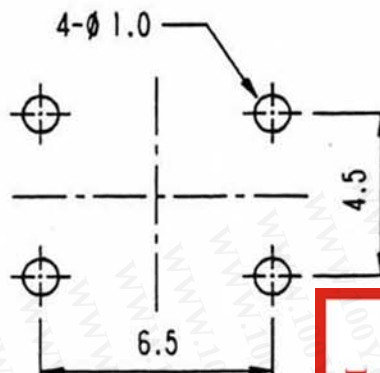

CIRCUIT DIAGRAM



Http://www.100y.com.tw

勝特力材料 886-3-5753170
勝特力电子(上海) 86-21-54151736
勝特力电子(深圳) 86-755-83298787

NO	PART NAME	Q'TY	MATERIAL	REMARK
1	CASE	1	NYLON 66	BLACK
2	STEM	1	NYLON 66	
3	COVER	1	SPTE	Sn
4	TERMINAL	1	C2680R-EH	Ag0.5u
5	CONTACT	1	C5210R-EH	Ag0.5u

	H	HA	HB	HC	HD	HE
L	4.3	5.0	6.0	6.3	7.0	7.3
	8.0	9.5	12.5	13.0	13.5	17.0
	HF	HH	HI	HJ	HK	HL

1. OPERATING FORCE : 130, 160, 250 ±50gf
2. TRAVEL : 0.25 ±0.1mm
3. CONTACT RESISTANCE : 100mΩ MAX
4. RATING : DC12V 50mA
5. OPERATING LIFE : 100,000 CYCLES MIN
6. GENERAN TOLERANCE : ±0.3

NO	TITLE	MATERIAL	TREATMENT	SPECIFICATION	EA	REFERENCE
△			UNIT	SCALE 5/1		TACT SWITCH
△			mm			
△			APPROVAL	CHECK DESIGN		PART NO. HTS-660LHX
△				99.11.24		
MARK	DATE	CHECK	DESIGN	PARK SANG JIN		