


ATA-I.D.C SOCKET 2.54mm(0.100")/ATA 型扁平電纜連接器

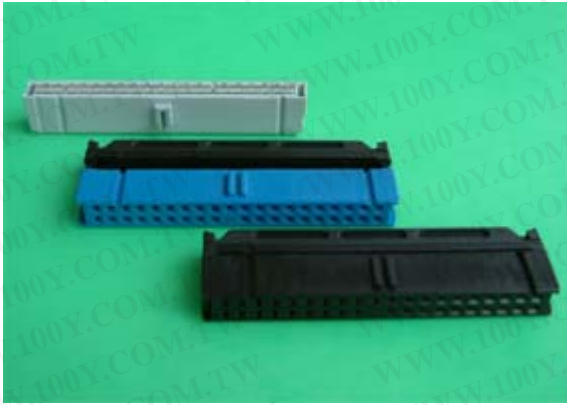

Material:

Housing: 30% Glass filled PBT UL94V-0

Contacts: Phosphor Bronze

Plating: Selective gold plated: gold plated on mating area and nickel plated on wire cutting area

Gold plated: 3u" over 50u" nickel

Cable: 0.635mm (0.025") pitch fiat cable

Electrical Characteristics:

Current Rating: 1 AMP

Insulator Resistance: 5000MΩmin. at DC 500V

Contact Resistance: 20mΩmax. at DC 100mA

Operating Temperature: -55°C~+105°C

Features:

- * Optional polarizing key, polarizing bump.
- * Optional strain relief.
- * Choices of gold plated or selective gold plated.

Mates with: 301 303 501 502 503

勝特力材料 886-3-5753170
勝特力电子(上海) 86-21-54151736
勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

