


D3P-052, D3P-054

勝特力材料 886-3-5753170
勝特力电子(上海) 86-21-54151736
勝特力电子(深圳) 86-755-83298787
Http://www.100y.com.tw

DC Solid State Relay



D3P SERIES

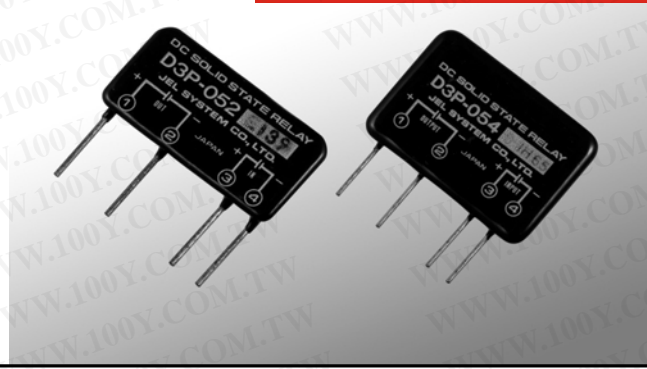

Features

Small size, Resin casted molding type
Available for PCB high-density packaging
Max. load current at 2A, 4A

SSR for DC load
Dielectric strength between input and output at 2,500V/1 min.


Type Information

D 3 P - 0 5 2

Rated Load Voltage
05 : 3 ~ 50V(Pure DC)

Max. load current
2 : 2A
4 : 4A


Characteristics

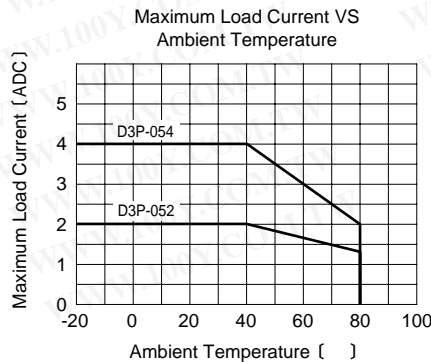

Description in the catalogue is subject to change without notice. Please read the specifications thoroughly before using. Please contact JEL SYSTEM for further information.

Dimensions (mm)


勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-54151736
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

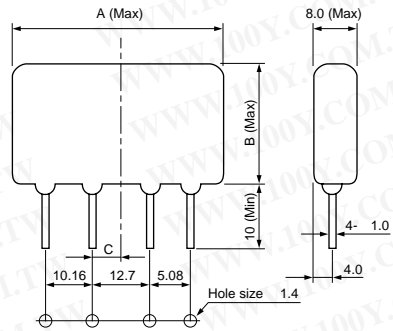

Model	Size	A	B	C
D3P-052		35	21	3.8
D3P-054		41	32	4.7

Dimensions For PCB Design

Equivalent Circuit

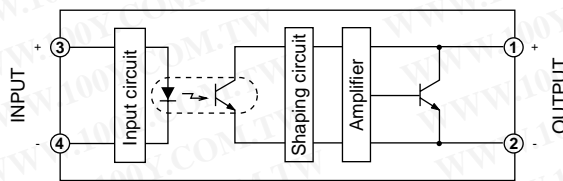

Description in the catalogue is subject to change without notice. Please read the specifications thoroughly before using. Please contact JEL SYSTEM for further information.

Ratings

(Ta = 25)




	Item	Symbols	D3P-052	D3P-054	Units
Output	Maximum Load Voltage	V _{OMAX}	50		V _{DC}
	Load Voltage Range	V _O	Pure DC	3 ~ 50	V _{DC}
			Bridge Rectification	35	V _{rms}
	Maximum Load Current	I _{OMAX}	2	4	A _{DC} /A _{rms}
Surge Current Ratings	I _{SURGE}	3 (1sec)	10 (0.1sec)	A	
Input	Maximum Input Voltage	V _{IMAX}	24		V _{DC}
	Input Impedance	R _{IN}	1500 ± 20 %		
General	Dielectric Strength	V _{ISO}	2,500 / 1min. (Between input and output) (Rh40 ~ 60 %)		V _{ACrms}
	Isolation Resistance	R _{ISO}	10 ⁸ and above DC500V (Between input and output) (Rh40 ~ 60 %)		
	Operating Temperature Range	T _{OPR}	- 20 ~ + 80		
	Storage Temperature Range	T _{STG}	- 30 ~ + 100		

Electrical Characteristics

(Ta = 25)

	Item	Symbols	D3P-052	D3P-054	Units
Output	Off State Leakage Current	I _{LEK}	1.0 and below (V _O = 50V)		μA _{DC}
	On State Voltage Drop	V _{SAT}	1.2 and below		V _{DC}
	Minimum Load Current	I _{OMIN}	1		mA
Input	Input Voltage Range	V _I	3.5 ~ 24		V _{DC}
	Operate Voltage	V _P	3.5 and below		V _{DC}
	Release Voltage	V _D	1 and above		V _{DC}
General	Operate Time	T _{ON}	0.5ms and below (Resistance load)		
	Release Time	T _{OFF}	0.5 and below (Resistance load)		
	Capacitance	C _{IO}	15 and below		PF

Description in the catalogue is subject to change without notice. Please read the specifications thoroughly before using.
 Please contact JEL SYSTEM for further information.

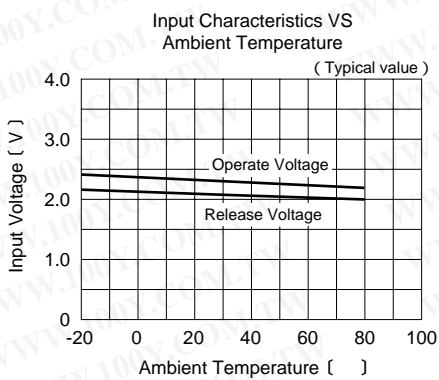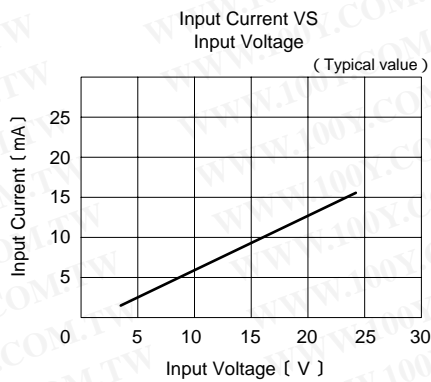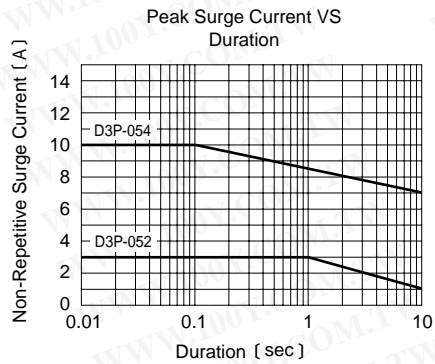

Description in the catalogue is subject to change without notice. Please read the specifications thoroughly before using. Please contact JEL SYSTEM for further information.