


12W (5V~12V) AC-DC SWITCHING ADAPTOR

Model	Output Rating	Tol.	R&N	Pmax.
JLD-05020	5V/2.0A	3%	50mV	10W
JLD-06015	6V/1.5A	3%	60mV	10W
JLD-07512	7.5V/1.2A	3%	80mV	10W
JLD-12010	12V/1.0A	3%	120mV	12W

其它规格可訂製

FEATURE

- Compact size , light weight
- Over load protection
- DC output plug option
- Short circuit protection
- Low cost / high reliability
- 100% full load burn-in test
- 1 year warranty

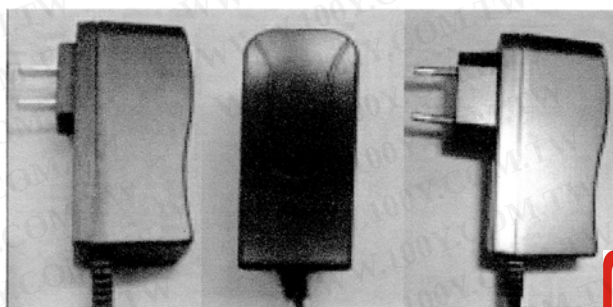

美規

66x27x45mm

歐規

胜特力材料 886-3-5753170
 胜特力电子(上海) 86-21-54151736
 胜特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

ELECTRICAL SPECIFICATIONS

Input

Input range ——— 100 – 240VAC(Full Range) , 47 – 63Hz
 Input current (rms) — 400mA @ 90VAC; 350mA @ 260VAC MAX
 Efficiency ——— >70% @ full load, 115VAC (DC Conversion)

Output

Voltage (Vo) ——— +5V ~ +12V
 Voltage regulation — ±8% @ constant voltage mode
 Current limit ——— ±8% @ constant current mode
 Maximum power (Po) ——— 12W 
 Length of output cable ——— 150 cm , AWG 22 X 2C
 Standard plug of DC output ——— As your instruction

ENVIRONMENTAL

Operating temperature ——— 0°C to +40 °C ambient
 Storage temperature ——— -10 °C to +60 °C
 Humidity ——— 20% ~ 90% RH

SAFETY

TUV CE UL FCC BSMI .RoHS.

