


Surge Arrester 2-Electrode JN2R-A5L SERIES

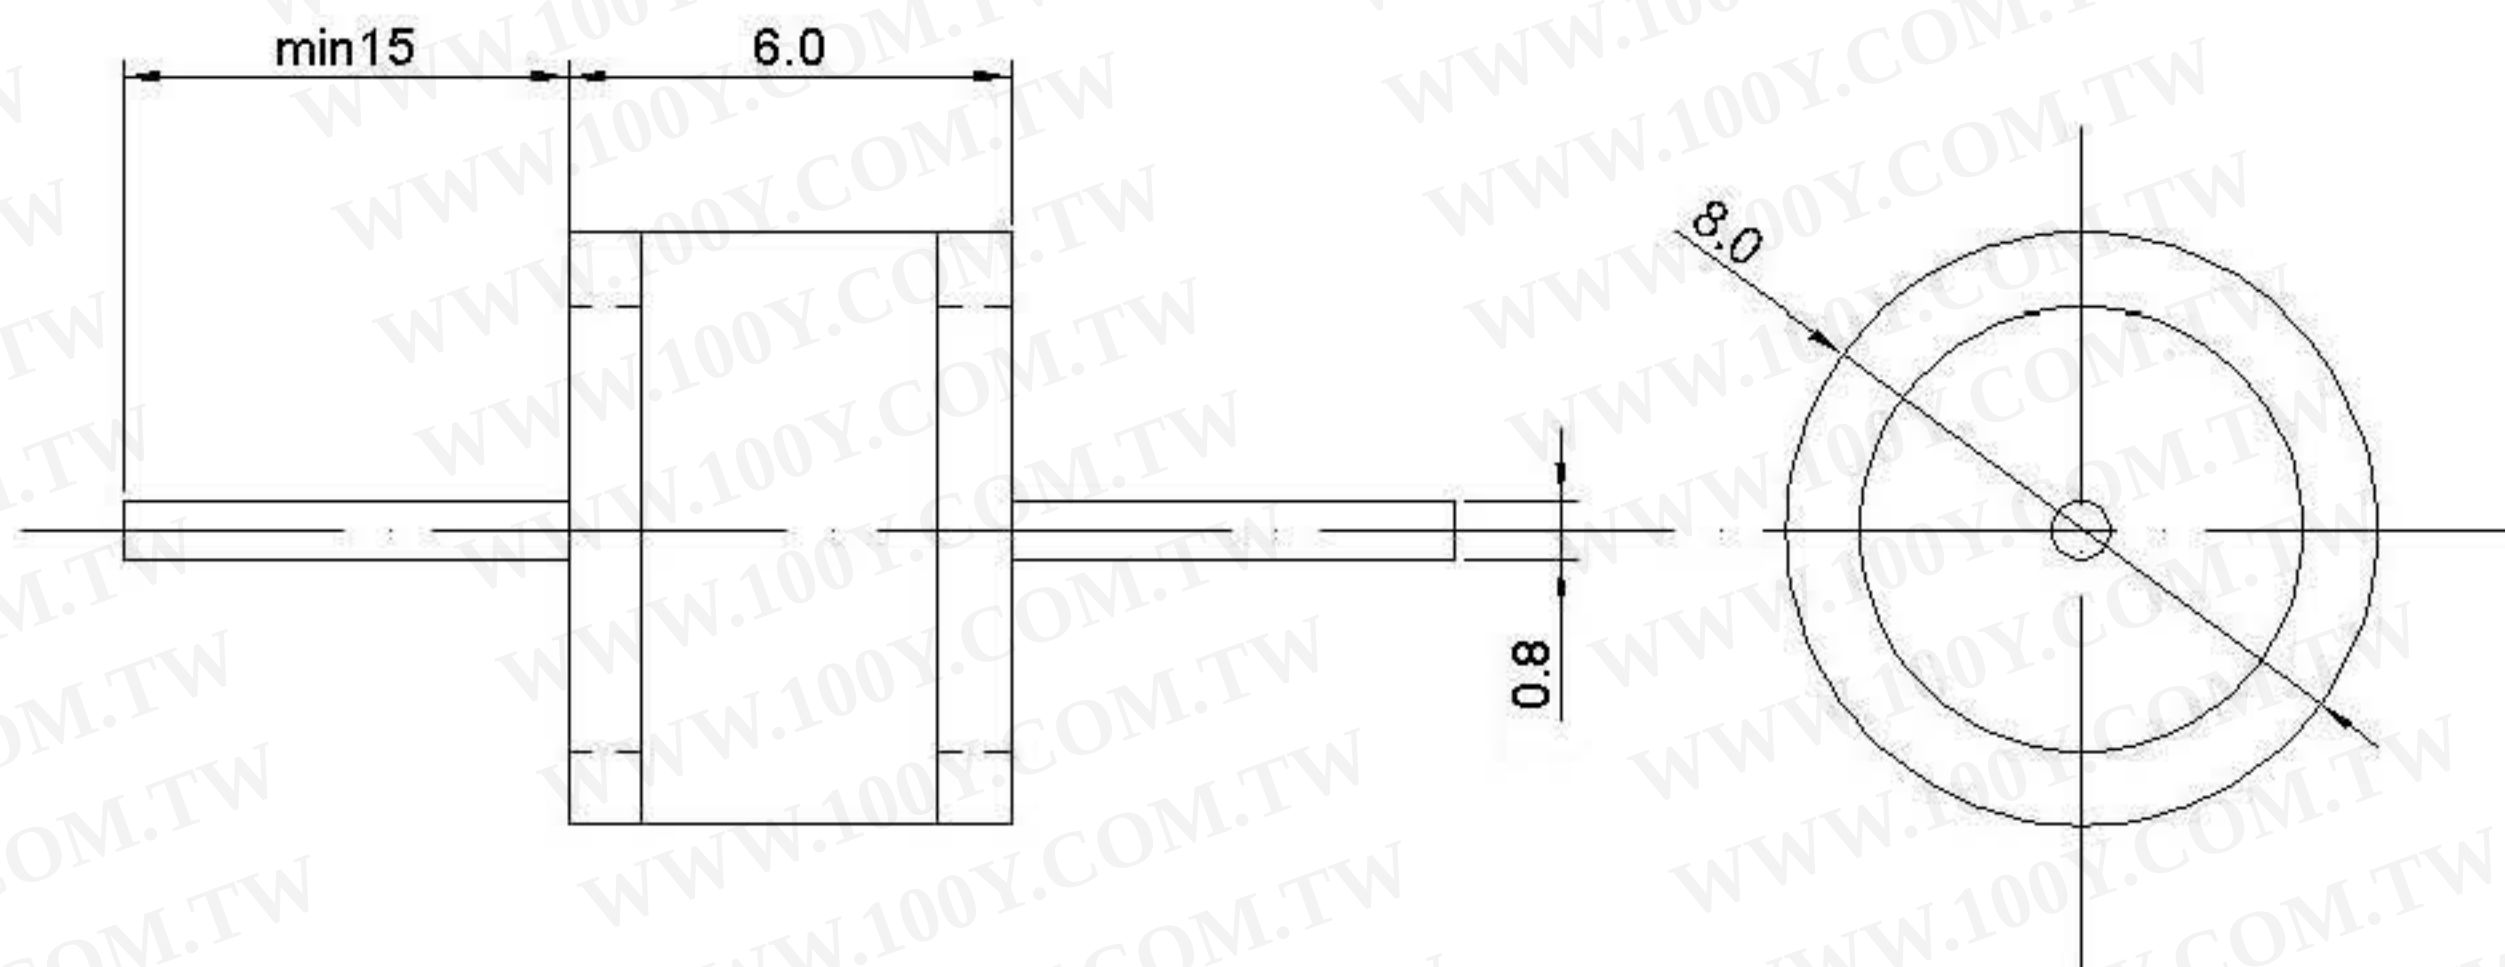

UNIT : mm

DC Spark-over Voltage (100V/s) V	Impulse Spark-over Voltage (1KV/us) V	Impulse Discharge Current (10/100us) (300times) A	Impulse Discharge Current (8/20us) (10times) KA	AC Discharge Current (50Hz 1s) (5times) A	Hold Over-Voltage V	Instlation Resistance Ω	Capacitance pF
75±25%	≤ 700	50	/	/	/	≥ 10 ¹⁰	< 1
90±20%							
150±20%	≤ 800	100	10	10	80		
230±30%					135		
300±20%							
350±20%							
420±20%							
470±20%							
600±20%	≤1200						
800±20%	≤1400						

物質成分表

Constructions	Material	Pb	Cd	Hg	Cr5+	PBB	PBDE	Icp-Report No.
Ceramic	Al ₂ O ₃	N/A	N/A	N/A	N/A	N/A	N/A	SH6127878 / CHEM
電帽	鋼鍍鎳	N/A	N/A	N/A	N/A	N/A	N/A	
引線	銅鍍鎳	N/A	N/A	N/A	N/A	N/A	N/A	

Soldering Profile Temperature : 850°C

Operating temperature range : - 40°C ~ + 85°C

Storage temperature range : Relative Humidity 85% at 40°C

Material data : Plating Ni ≥ 0.7um

The place of origin : China

Weight : 1.5g

UL NO. : E225893