



CONQUER

ELECTRONICS FUSES

Type JSO/JSP 6.3x30mm

Normal Blow Glass Tube Fuse Series

JSO

JSP



Approvals

JSO

MITI

1A~30A

JSP (With Pig-Tail)

MITI

1A~30A

Electrical Characteristics

Rated Current	1.3 In	1.6 In	2 In
	MIN	MAX	MAX
10mA~30A	4 Hrs.	1 Hrs	120 Sec

Interrupting Ratings

1A~30A: 500 amperes at 125V AC
100 amperes at 250V AC

Operating Temperature

-55°C to +125°C

Physical Specification

Materials

Glass body / Nickel Plated Brass Caps

Lead Wire:

Diameter ϕ 0.8 mm 12A and less.

Diameter ϕ 1.0 mm for rating above 13A to 19A.

Diameter ϕ 1.6 mm for rating above 20A.

Packaging


In Bulk:

JSO-500 pcs ; JSP-250 pcs per box

Cartridge Catalog Number	Axial Lead Catalog Number	Ampere Rating [In]	Voltage Rating (V)	Nominal Resistance Cold Ohms	Nominal Melting I ² t A ² Sec
JSO .010	JSP .010	10 mA	250V	*	*
JSO .020	JSP .020	20 mA		*	*
JSO .030	JSP .030	30 mA		*	*
JSO .032	JSP .032	32 mA(1/32A)		*	*
JSO .040	JSP .040	40 mA		*	*
JSO .050	JSP .050	50 mA		*	*
JSO .060	JSP .060	60 mA		*	*
JSO .063	JSP .063	63 mA		*	*
JSO .070	JSP .070	70 mA		*	*
JSO .080	JSP .080	80 mA		*	*
JSO .100	JSP .100	100 mA		10.000	0.00100
JSO .150	JSP .150	150 mA		5.0170	0.00220
JSO .200	JSP .200	200 mA		4.0050	0.00400
JSO .250	JSP .250	250 mA		3.0050	0.01250
JSO .300	JSP .300	300 mA		2.9000	0.01800
JSO .400	JSP .400	400 mA		1.8700	0.03200
JSO .500	JSP .500	500 mA		0.4319	0.07500
JSO .600	JSP .600	600 mA		0.3720	0.10800
JSO .700	JSP .700	700 mA		0.2722	0.14700
JSO .750	JSP .750	750 mA		0.2330	0.16875
JSO .800	JSP .800	800 mA		0.2004	0.25600
JSO 001	JSP 001	1 A		0.1421	0.40000
JSO 1.50	JSP 1.50	1.5 A		0.0800	2.25000
JSO 002	JSP 002	2 A		0.0547	6.00000
JSO 2.50	JSP 2.50	2.5 A		0.0428	9.37500
JSO 003	JSP 003	3 A		0.0313	13.5000
JSO 3.15	JSP 3.15	3.15 A		0.0308	14.8830
JSO 004	JSP 004	4 A		0.0218	24.0000
JSO 005	JSP 005	5 A		0.0175	37.5000
JSO 006	JSP 006	6 A		0.0143	72.0000
JSO 6.30	JSP 6.30	6.3 A		0.0140	119.070
JSO 007	JSP 007	7 A		0.0118	171.500
JSO 7.25	JSP 7.25	7.25 A		0.0113	210.250
JSO 7.50	JSP 7.50	7.5 A		0.0110	225.000
JSO 008	JSP 008	8 A		0.0107	256.000
JSO 010	JSP 010	10 A		0.0081	400.000
JSO 012	JSP 012	12 A		0.0070	576.000
JSO 013	JSP 013	13 A		0.0060	676.000
JSO 015	JSP 015	15 A		0.0050	900.000
JSO 018	JSP 018	18 A		0.0040	1296.00
JSO 020	JSP 020	20 A		0.0034	2000.00
JSO 025	JSP 025	25 A		0.0022	3125.00
JSO 030	JSP 030	30 A		0.0018	4500.00

*Please contacts CONQUER.

Mechanical Dimensions

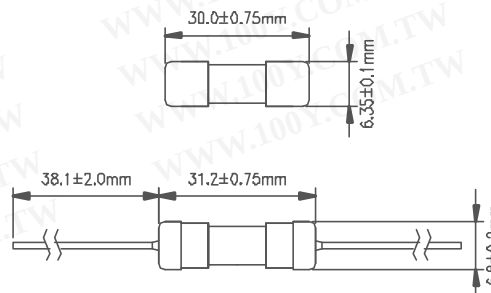

勝特力材料 886-3-5753170
勝特力电子(上海) 86-21-54151736
勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)