

-- 3 PHASE SERIES(280VAC)(HEATER LOAD ONLY)

型號：

品名：K3PH20C25DA、K3PH20C40DA、K3PH20C50DA



勝特力材料 886-3-5753170
勝特力电子(上海) 86-21-54151736
勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)


產品說明：

SPECIFICATIONS


MODEL NO.	CONTROL VOLTAGE RANGE	MUST TURN OFF VOLTAGE	INPUT IMPEDANCE	MAX LOAD CURRENT	LOAD VOLTAGE RANGE	MIN ELONGINO VOLTAGE	MAX OFF-STATE LEAKAGE	FREQUENCY RANGE	MAX 1-CYCLE PEAK SURGE
K3PH-20C25DA	0 TO 32VDC	MAX 3VDC	1.5Kohm	25 A	24-280VAC	800 VAC	LESS 10 mA	47-63Hz	315A
K3PH-20C40DA	0 TO 32VDC	MAX 3VDC	1.5Kohm	40 A	24-280VAC	800 VAC	LESS 10 mA	47-63Hz	450A
K3PH-20C50DA	0 TO 32VDC	MAX 3VDC	1.5Kohm	50 A	24-280VAC	800 VAC	LESS 10 mA	47-63Hz	500A

MODEL NO.	MAX OFF STATE delay	MAX ON-STATE VOLTAGE DROP	ISOLATE IMPEDANCE	TURN ON TIME	TURN OFF TIME	CAPACITANCE IN-OUT	WEIGHT (g)		
K3PH-20C25DA	280V/1 SEC	1.0Vrms	10 ¹⁰ ohm	2800Vrms	2800Vrms	LESS 10mSec	LESS 10mSec	LESS 473pf	600 g
K3PH-20C40DA	280V/1 SEC	1.0Vrms	10 ¹⁰ ohm	2800Vrms	2800Vrms	LESS 10mSec	LESS 10mSec	LESS 473pf	600 g
K3PH-20C50DA	280V/1 SEC	1.0Vrms	10 ¹⁰ ohm	2800Vrms	2800Vrms	LESS 10mSec	LESS 10mSec	LESS 473pf	600 g


OUTLINE DIMENSIONS (unit:mm)

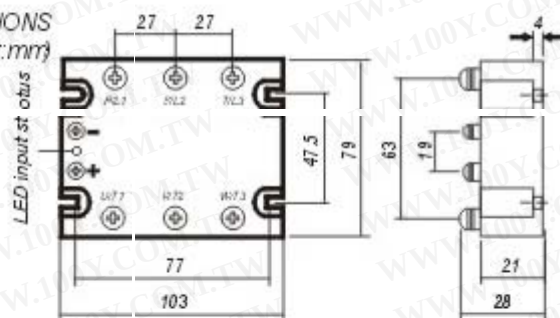

EQUIVALENT CIRCUIT

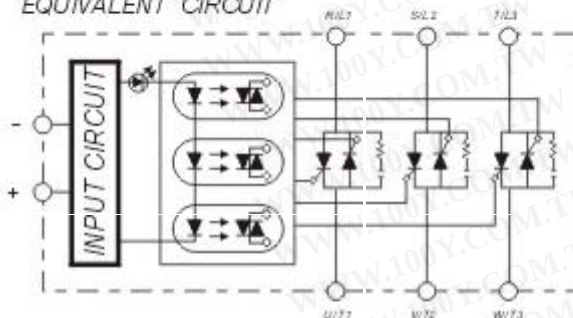


Example of 3Φ SSR Application

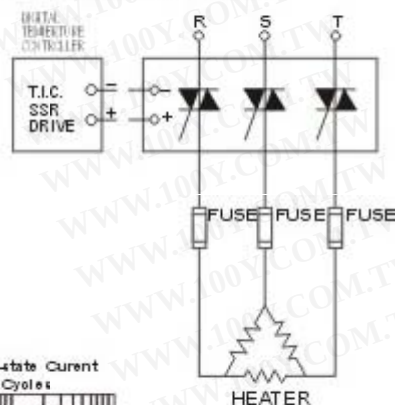

CHARACTERISTIC CURVES

Characteristics curve



Non Repetitive Surge On-state Current

