

-- 3 PHASE SERIES(480VAC)(INDUCTIVE LOAD ONLY)

型號：

品名：K3PI4025DA、K3PI4040DA、K3PI4050DA




產品說明：

SPECIFICATIONS


MODEL NO.	CONTROL VOLTAGE RANGE	MUST TURN OFF VOLTAGE	INPUT IMPEDANCE	MAX. LOAD CURRENT	LOAD VOLTAGE RANGE	MIN. BLOCKING VOLTAGE	MAX. OFF-STATE LEAKAGE	FREQUENCY RANGE	MAX. 1-CYCLE PEAK SURGE
K3PI4025DA	12T032VDC	MAX 9.5VDC	1.5Kohm	25A	48-480VAC	1200VAC	LESS 10 mA	47-63HZ	315A
K3PI4040DA	12T032VDC	MAX 9.5VDC	1.5Kohm	40A	48-480VAC	1200VAC	LESS 10 mA	47-63HZ	450A
K3PI4050DA	12T032VDC	MAX 9.5VDC	1.5Kohm	50A	48-480VAC	1200VAC	LESS 10 mA	47-63HZ	500A

MODEL NO.	MAX. OFF-STATE VOLTAGE DROP	MAX. ON-STATE VOLTAGE	ISO. LATE IMPEDANCE	INDUCTIVE SURGE CURRENT (10ms)	INDUCTIVE SURGE VOLTAGE (10ms)	TURN ON TIME	TURN OFF TIME	CAPACITANCE IN-OUT	WEIGHT (g)
K3PI4025DA	800 V/1 SEC	1.8Vrms	10 ³ ohm	2600Vrms	2600Vrms	LESS 10AC cycle	LESS 10AC cycle	LESS 473pf	600 g
K3PI4040DA	800 V/1 SEC	1.8Vrms	10 ³ ohm	2600Vrms	2600Vrms	LESS 10AC cycle	LESS 10AC cycle	LESS 473pf	600 g
K3PI4050DA	800 V/1 SEC	1.8Vrms	10 ³ ohm	2600Vrms	2600Vrms	LESS 10AC cycle	LESS 10AC cycle	LESS 473pf	600 g


OUTLINE DIMENSIONS (unit:mm)

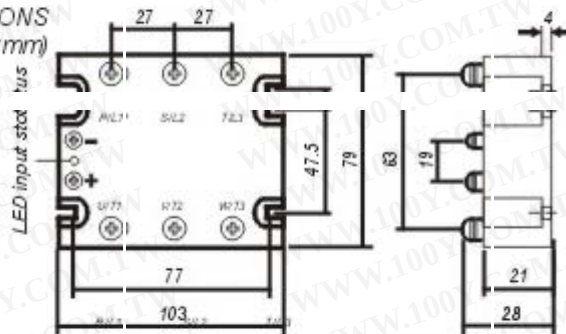



EQUIVALENT CIRCUIT

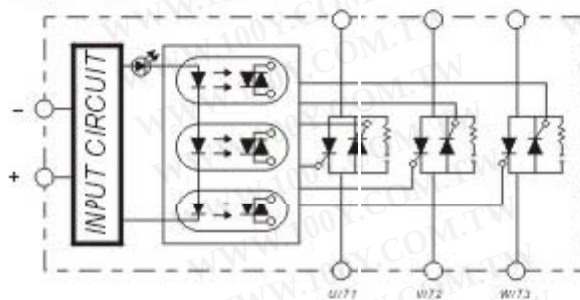

Example of 3-φ SSR Application

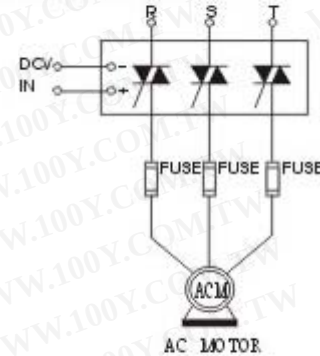

CHARACTERISTIC CURVES

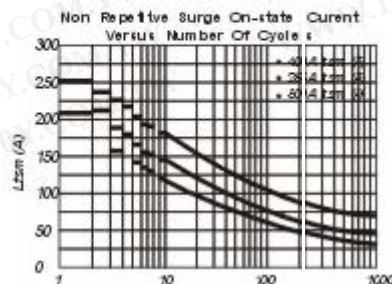

勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-54151736
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)