


SPECIFICATION

Customer :	K.C.Dwg.No. :
Customer's P/N:	K.C.P/N. :PJ2024OT

(1) P/N

FLM - 2 0 1 2 0 9 -4R7K

K - T

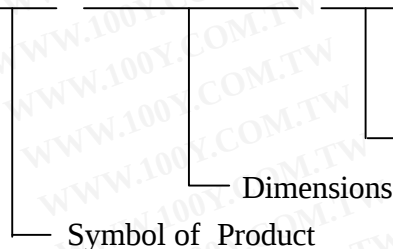

Packaging
Inductance Tolerance

Inductance

Inductance Tolerance: J:± 5% , K:± 10% , M:± 20%

Packaging Style: B: Bulk , T: Tape and Reel

胜特力材料 886-3-5753170
胜特力电子(上海) 86-21-54151736
胜特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

(2)Mechanical Dim.	(3) Electrical Characteristics					(4) Dimension			
	Type	L (uH)	Q	RDC	SRF	A	B	C	D
	Spec.	10 MHz	10 MHz	(OHM)	MHz	(m/m)	(m/m)	(m/m)	(m/m)
	Your								
	Suggest.	4.7±10%	40 ⁻⁰	1.0 ⁺⁰	35 ⁻⁰	2.0±0.2	1.2±0.2	0.9±0.2	0.5±0.3
	1	4.570	67.0	0.418	41.0	2.04	1.33	0.96	0.46
	2	4.690	65.0	0.454	42.0	2.02	1.30	0.98	0.46
	3	4.860	65.0	0.512	42.0	2.02	1.28	0.98	0.48
	4	4.430	67.0	0.467	45.0	2.00	1.30	0.98	0.42
	5	4.700	62.0	0.431	44.0	2.02	1.30	1.02	0.40
	6	4.620	65.0	0.455	45.0	2.00	1.32	1.02	0.38
	7	4.620	64.0	0.462	44.0	2.01	1.32	1.04	0.42
	8	4.780	65.0	0.462	44.0	2.02	1.30	1.06	0.46
	9	4.520	62.0	0.462	44.0	2.01	1.28	1.08	0.46
	10	4.720	63.0	0.472	45.0	2.00	1.32	0.88	0.48
	X	4.651	64.5	0.460	43.6	2.01	1.31	1.00	0.44
	R	0.430	5.0	0.094	4.0	0.04	0.05	0.20	0.10

(5) Condition In Testing:	(6) Test Instruments:	
..... Temp. 25 ⁰ C Humidity55%	Inductance: HP 4291B RF impedance/material analyzer ...RDC : millohm meter 4338B ..Rated Current MAX:30mA	
Drawn by:	Checked by:	Approved by: