
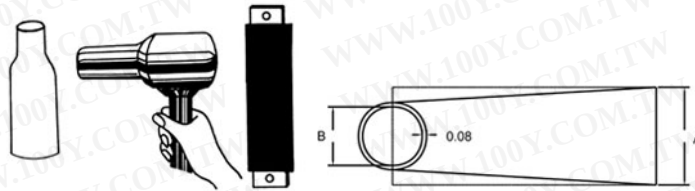


勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-54151736
 勝特力电子(深圳) 86-755-83298787
 Http://www.100y.com.tw

0920 KSS 熱收縮套管(扁型) HEAT SHRINKING SLEEVE

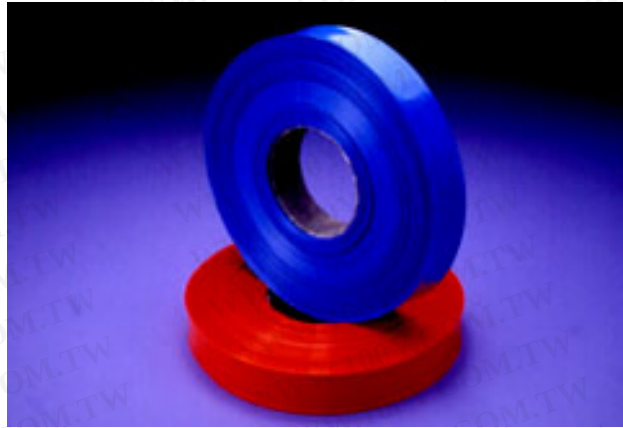

材 質：高級硬質收縮性 P.V.C.熱收縮率為 50%，厚度 0.08mm。

用 法：將套管套於匯流排上，再以吹風機或熱水加熱，即可套住匯流排做絕緣保護和分色用。

用 途：匯流排做絕緣保護和分色用。

單位 : mm 型 號 Item No.	折 徑 (扁) A	圓 徑 Diaφ B	熱收縮範圍 Shrinkable Range	顏 色 Color	包 裝 Packing
 HS-6.5	6.5	4.1	6.5~3.6	紅.白.藍.黑(黃.綠備 洽) 6.5 . 8.5 . 12 . 15 . 20 備有透明	每捲 100M
 HS-8.5	8.5	5.2	8.5~4.5		
 HS-12	12	7.6	12~6.5		
 HS-15	15	10	15~5.8		
 HS-20	20	13	20~11		

 HS-30	30	19	30~16
 HS-40	40	25	40~22
 HS-50	50	32	50~28
 HS-60	60	38	60~33
 HS-70	70	44	70~37
 HS-80	80	50	80~42
 HS-100	100	63	100~55
 HS-120	120	76	120~65
 HS-150	150	95	150~90
 HS-170	170	108	170~94
 HS-200	200	127	200~110

勝 特 力 材 料 886-3-5753170
 勝特力电子(上海) 86-21-54151736
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)