



0335 KSS 插鞘式紮線帶 PUSH MOUNT TIE

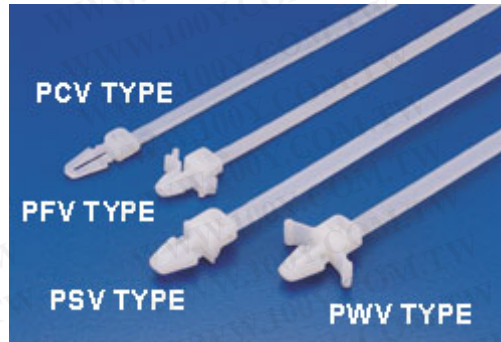

勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-54151736
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

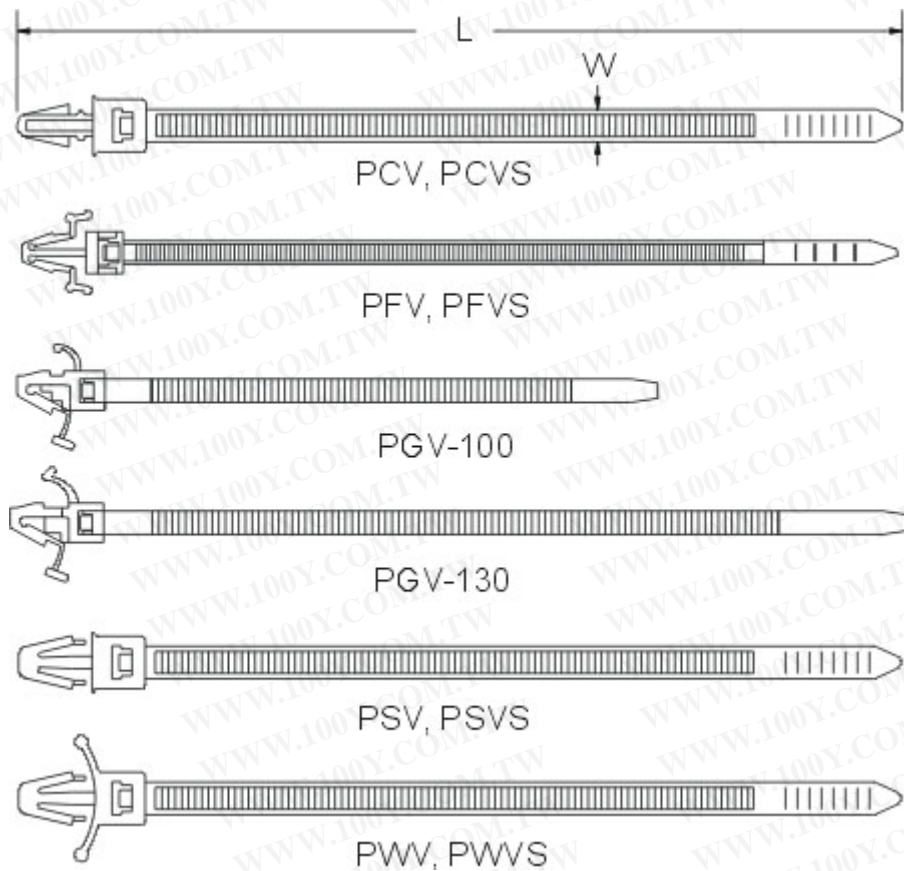

材 質：UL 合格之 NYLON66(本色)，防火等級 94V-2，不易老化。
 使用方法：先將機板挖孔，再以紮線帶插入孔內，再將電線束緊即可。

單位： mm	型號 Item No.	長 L		寬 W	最大束線徑 Max. Bundle Dia.	基板 孔	承受力 Min Tensile Strength		包裝 Packing
		mm	inch				lbs	kgs	
	PCVS-130	130	5 1/8"	4.8	30	4.8	50	22	100pcs

	 PCV-155	155	6 1/8"	3.5	40	4.8	40	18
	 PCVS-200	203	8"	4.8	50	4.8	50	22
	 PCV-200	203	8"	4.8	50	6.4	50	22
	 PWVS-100	112	4 3/8"	2.5	25	4.6	18	8
	 PWVS-130	132.8	5 1/8"	4.8	30	4.6	50	22
	 PWVS-155	155	6 1/8"	3.5	36	4.6	40	18
	 PWV-130	130	5 1/8"	4.8	30	6.0	50	22
	 PWV-200	200	8"	4.8	50	6.0	50	22
	 PSV-130	130	5 1/8"	4.8	30	6.4	50	22
	 PSV-200	200	8"	4.8	50	6.4	50	22
	 PGV-100	101	4"	3.5	77.6	4.8	40	18
	 PGV-130	135	5 3/10"	3.5	103.5	4.8	40	18
	 PFVS-130	130	5 1/8"	3.5	30	4.8	40	18
	 PFVS-200	200	8"	3.5	50	4.8	40	18
	 PRVS-130BK	134.5	5 1/4"	4.8	30	6.0	40	18

勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-54151736
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)