

Yellow Stone Corp.

勝 特 力 材 料 886-3-5753170
勝特力电子(上海) 86-21-54151736
勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

LED PRODUCTS

LA503V4CA-1D/01

DATA SHEET

Approved By:

Checked By:


Prepared By:

Characters

- § High intensity.
- § Viewing angle 15°.
- § Reliable and Rugged
- § Standard 5mm diameter package.

ITEM	MATERIALS
Resin(Mold)	Epoxy
Lens Color	Water Transparent
Lead Frame	Ag Plating Iron Alloy
Dice	AlInGaP/GaP

Outline Dimensions

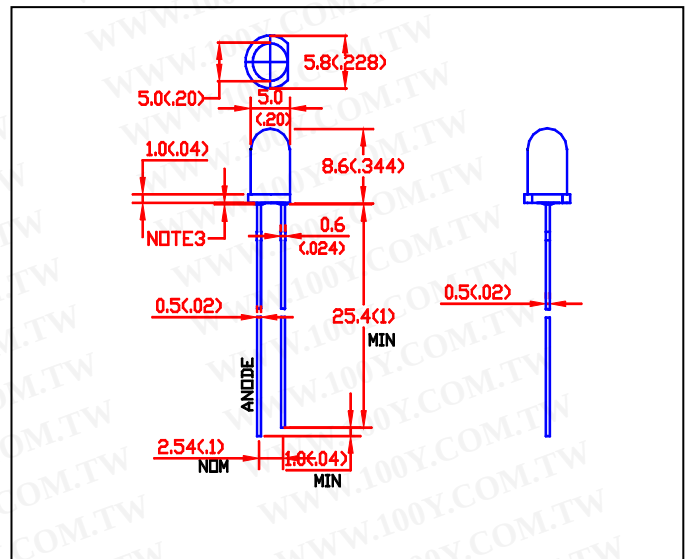


Absolute Maximum Ratings (Ta=25°C)

Item	Symbol	Value	Unit
		Red	
Power Dissipation	PD	80	mW
DC Forward Current	IF	20	mA
Pulsed Forward Current	IFP	100 *	mA
Reverse Voltage	VR	5 ▲	V
Operating Temperature	Topr	-25 ~ +80	°C
Storage Temperature	Tstg	-40 ~ +100	°C
Soldering Temperature△	Tsol	260	°C

* Duty 1/10 Pulse Width 0.1ms ▲ This Rating is Zener Diode
 △ At the position of 4mm from the bottom of the package within 5 seconds.

Directive Characteristics (Ta=25°C)

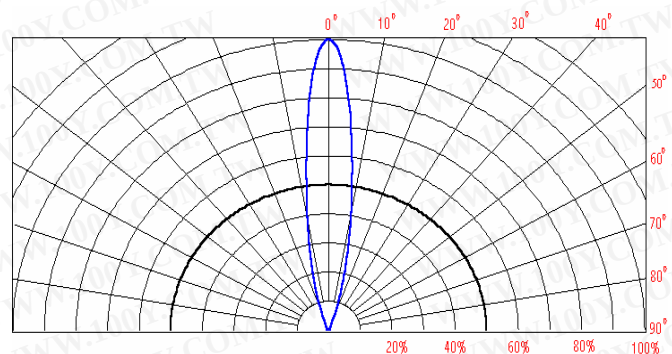

Electrical-Optical Characteristics (Ta=25°C)

Part No.	Luminous Intensity (mcd) ☆			Forward Voltage (V)			Forward Voltage (V)			Reverse Current (μA)		Wavelength Characteristics (nm)			
	Typ.	Min.	IF (mA)	Typ.	Max.	IF (mA)	Min.	IF (μA)	Max.	VR (V)		λ D Typ.	λ D Max.	Δ λ Typ.	IF (mA)
LA503V4CA-1D/01	6000	4612	20	2.25	2.6	20	1.4	100	50	5		635	640◆	25	20

☆ Axial Direction (luminous Intensity)

◆ Products are sorted by wavelength, which cannot be specified by customer..


Notes:

- § All dimensions are in millimeters (inches) .
- § Tolerance is ± 0.25 (.010) mm unless otherwise noted.
- § Protruded resin under flange is 1.0 mm (.04) max.
- § Lead spacing is measured where the leads emerge from the package.


Typical Characteristics

The data typical , and the value is not guaranteed.


IF-VF (Ta=25°C)

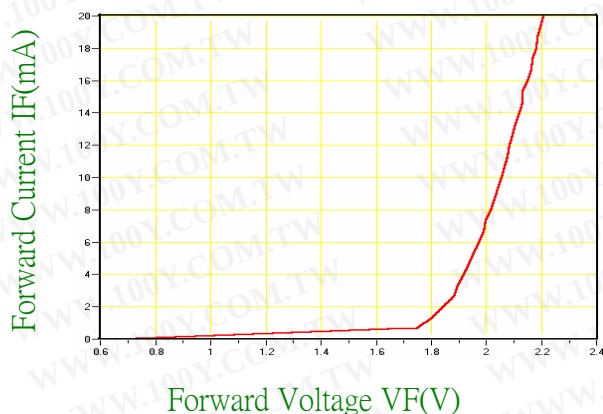


Relative Luminous Intensity-IF (Ta=25°C)

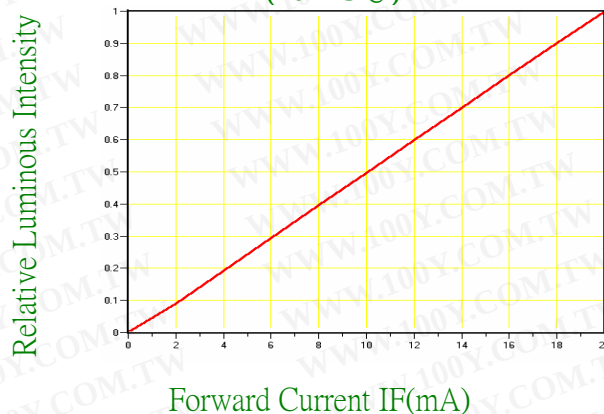


Wavelength Characteristics (Ta=25°C)

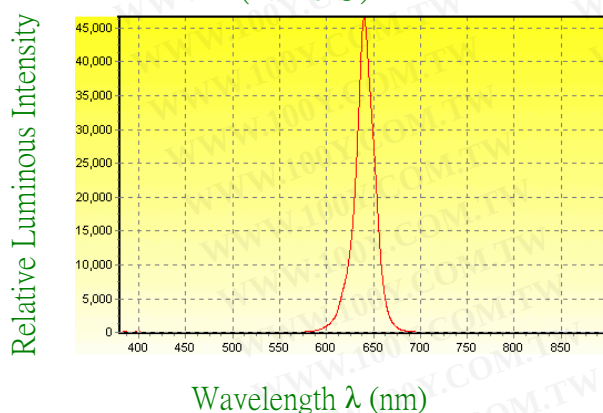

Relative Luminous Intensity-Ta

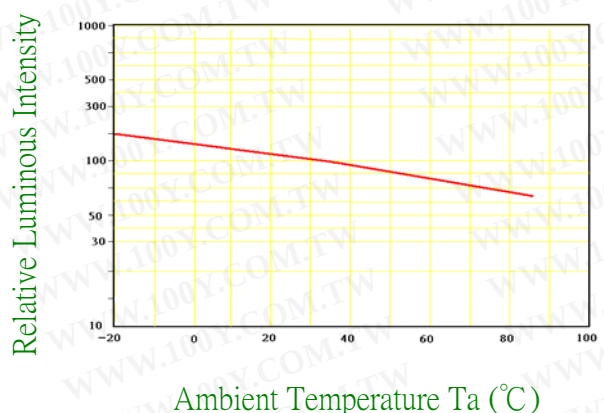

IF-Ta

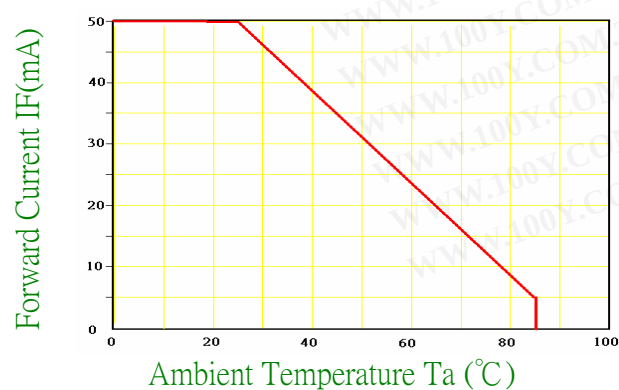

θ - λ (Ta=25°C)

