

# LP-2800 LP-3500 邏輯探針

## LOGIC PROBE

### Common Specifications:

- Input impedance :  $1M\Omega$ .
- width of min. pulse : 30 ns.
- max. input frequency : 17MHz.
- measurable Logic Gate : TTL and CMOS

Logic 1 (red LED Lights)and then buzz.


$2.3V \pm 0.2V$  70%  $V_{cc}$

Logic 0 (green LED lights)and then buzz.

$0.8V \pm 0.2V$  30%  $V_{cc}$ .

- input overvoltage protection :  $\pm 220V$  DC/AC 15 sec.
- Pulse (yellow LED) flashing time : 500ms.
- Power supply protection :  $\pm 20V$ .

dimension	Weight
212×26.5×18mm (main body)	65g
235×78×32mm (with case)	210g

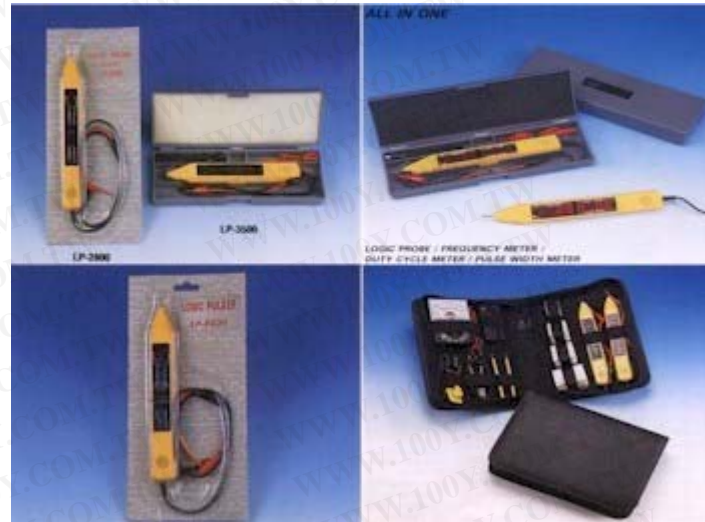

勝特力材料 886-3-5753170  
勝特力电子(上海) 86-21-54151736  
勝特力电子(深圳) 86-755-83298787  
[Http://www.100y.com.tw](http://www.100y.com.tw)

### Special functions for LP-3500:

- ABS CASE
- Two audio tones.
- Two external terminal.

It is also available for LP-2800 but at extra-pay.