

## MA Series - PCB Terminal Block



### Model No: MA412-500M Modular

#### Material

Terminal: Brass, Tin plated

Wire protector: Stainless strip steel

Insulating Body: Polyester

Screw: M3.0, steel, Ni plated

Color: Blue

#### Environmental

Operation temperature: -33 °C to 105 °C

Short-time temperature: up to 250°C ( 392°F)

#### Electrical

Current rating: 16 Amp AC250V

Insulation Withstands Volt: AC1500V min

Insulation resistance: >5000MΩ DC500V

PCB hole Dia.: φ1.4mm

Wire strip length: 4 ~ 5mm

Wire range: 16 ~ 24 AWG

Screw torque: 4.0 lb-inch


勝特力材料 886-3-5753170

勝特力电子(上海) 86-21-54151736

勝特力电子(深圳) 86-755-83298787

[Http://www.100y.com.tw](http://www.100y.com.tw)

MA412\*500




□ □ : Poles

500: Pitch 5.00mm

412 : Standard

MA: Type

PCB Layout

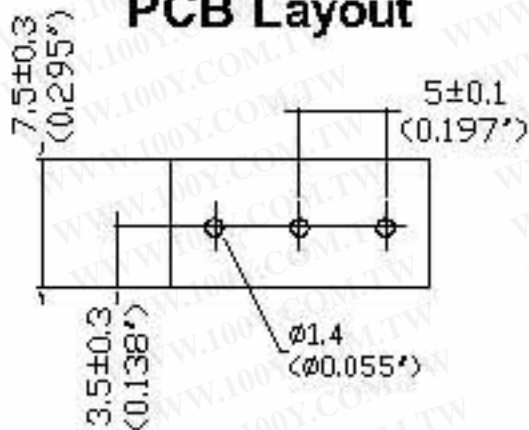

勝特力材料 886-3-5753170  
 勝特力电子(上海) 86-21-54151736  
 勝特力电子(深圳) 86-755-83298787  
[Http://www.100y.com.tw](http://www.100y.com.tw)

