

勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-54151736
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

Time On Delay Make Relay

MDUV 288 Delay-On Relay

Features

- Width " Automatic Reset " if power interruption the MDUV288 will reset to your delay time.
- All Solid State (No Moving Parts)
Outstanding long Life performace A vivid dark blue with Easy-to-Read white print Timer.
- Made from Fire/Heat retardment P.B.T. Compound case.
- Delay-On 0.1 to 8 Minutes (Adjustable time dial).



Specifications :

Time :

- Adjustable 0.1 - 8 Minutes
- Repeat accuracy : +/- 2% (Under fixed Conditions)
- Recycle Time : 40ms Maximum (After timing)

Voltage :


- Range : 20 - 288VDC
- Frequency : 60HZ / 50HZ

Output :

- Type : Solid State
- Max. Current : 1A Steady State, 10A Inrush at 55°C
- Min. Current : 40mA
- Voltage drop : Typical 205V at 1A current

Protection :

- Internal Varister and RC snubber Transient Protection
- Min 1500Vrms Dielectric Breakdown
- Min 100mΩ Insulation resistance (Test at 500VDC)

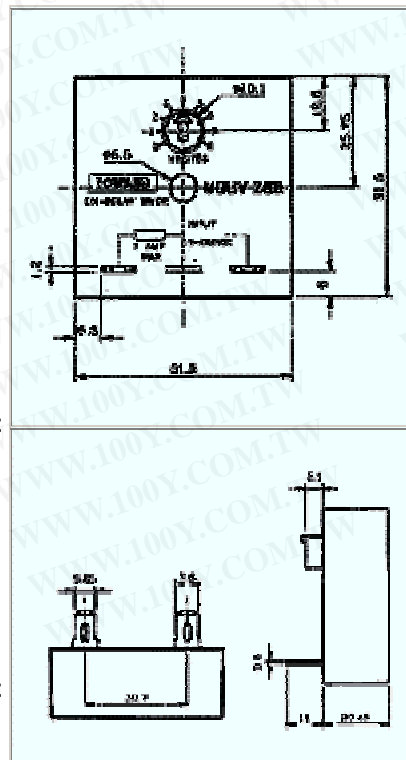

Temperature :

■ operating Temperature : 20 to 70°C

■ Storage Temperature : 30 to 80°C

勝特力材料 886-3-5753170
勝特力电子(上海) 86-21-54151736
勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)