

GTR Module

Silicon N Channel IGBT

High Power Switching Applications

Motor Control Applications

Features


- High input impedance
- High speed: $t_f = 1.0\mu s$ (Max.) $t_{rr} = 0.5\mu s$ (Max.)
- Low saturation voltage: $V_{CE(sat)} = 2.7V$ (Max.)
- Enhancement mode
- The electrodes are isolated from case

Maximum Ratings ($T_a = 25^\circ C$)

CHARACTERISTICS		SYMBOL	RATING	UNIT
Collector-Emitter Voltage		V_{CES}	1200	V
Gate-Emitter Voltage		V_{GES}	± 20	V
Collector Current	DC	I_C	300	A
	1ms	I_{CP}	600	
Forward Current	DC	I_F	300	A
	1ms	I_{FM}	600	
Collector Power Dissipation ($T_c = 25^\circ C$)		P_C	2000	W
Junction Temperature		T_j	150	$^\circ C$
Storage Temperature Range		T_{stg}	-40 ~ 125	$^\circ C$
Isolation Voltage		V_{Isol}	2500 (AC 1 Minute)	V
Screw Torque (Terminal: M4/M6/Mounting)		—	2/3/3	N ¥ m


Equivalent Circuit

(MG300Q1US11)

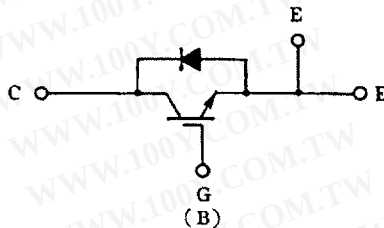

勝特力材料 886-3-5753170
勝特力电子(上海) 86-21-54151736
勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

Unit in mm






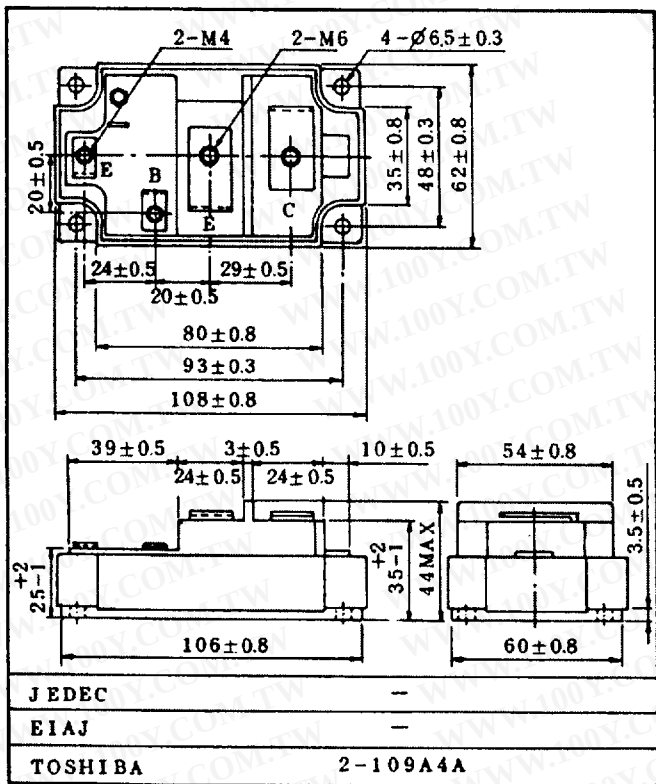








Weight : 465g

勝特力材料 886-3-5753170
勝特力电子(上海) 86-21-54151736
勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)


Electrical Characteristics (Ta = 25°C)

CHARACTERISTIC		SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Gate Leakage Current		I_{GES}	$V_{GE} = \pm 20V, V_{CE} = 0$	—	—	± 500	nA
Collector Cut-off Current		I_{CES}	$V_{CE} = 1200V, V_{GE} = 0$	—	—	4	mA
Gate-Emitter Cut-off Voltage		$V_{GE (OFF)}$	$I_C = 300mA, V_{CE} = 5V$	3.0	—	6.0	V
Collector-Emitter Saturation Voltage		$V_{CE (sat)}$	$I_C = 300A, V_{GE} = 15V$	—	2.2	2.7	V
Input Capacitance		C_{ies}	$V_{CE} = 10V, V_{GE} = 0, f = 1MHz$	—	42000	—	pF
Switching Time	Rise Time	t_r		—	0.3	0.6	μs
	Turn-on Time	t_{on}		—	0.4	0.8	
	Fall Time	t_f		—	0.6	1.0	
	Turn-off Time	t_{off}		—	1.2	1.8	
Forward Voltage		V_F	$I_F = 300A, V_{GE} = 0$	—	2.0	3.0	V
Reverse Recovery Time		t_{rr}	$I_F = 300A, V_{GE} = -10V$ $di/dt = 300A/\mu s$	—	0.25	0.5	μs
Thermal Resistance		$R_{th (j-c)}$	Transistor	—	—	0.062	°C/W
			Diode	—	—	0.2	

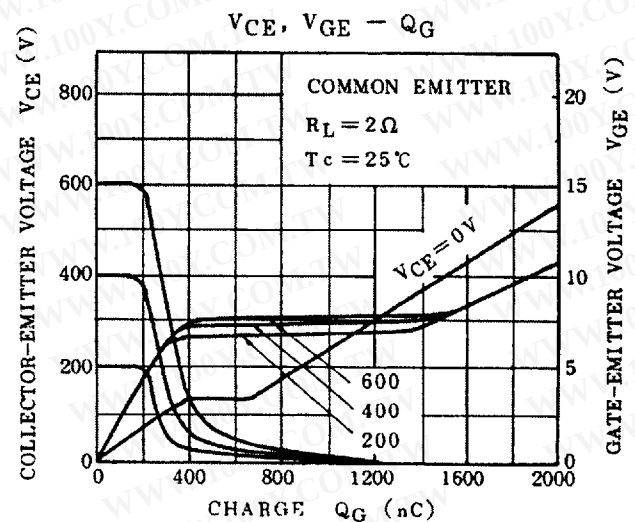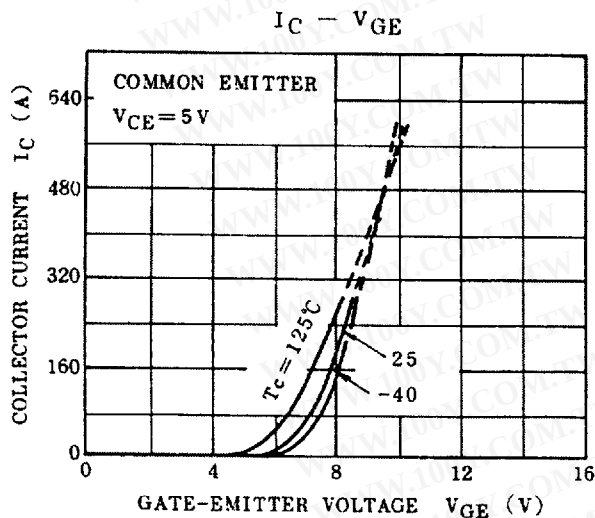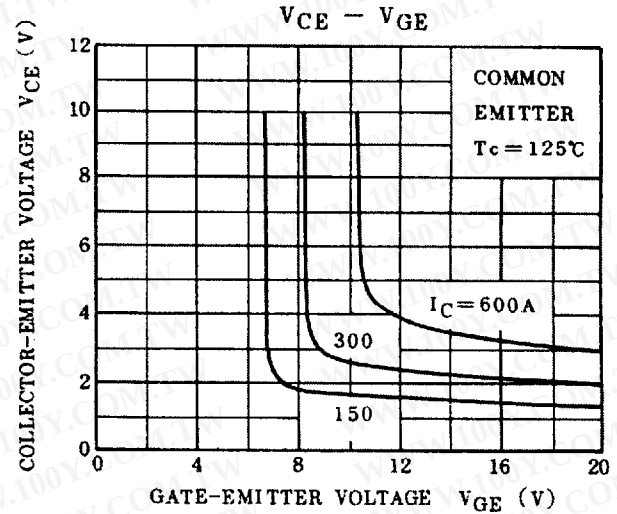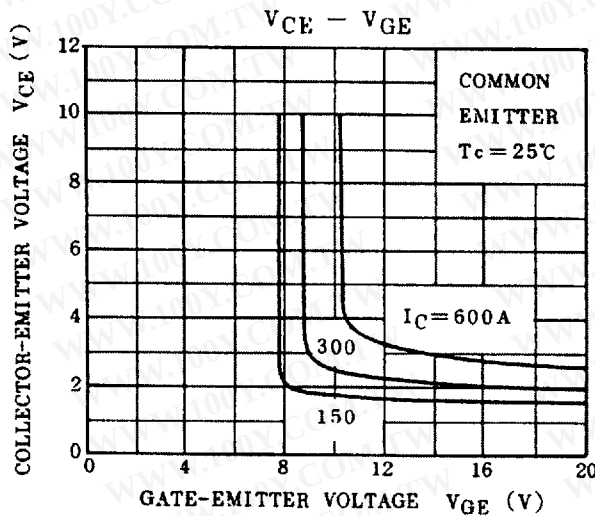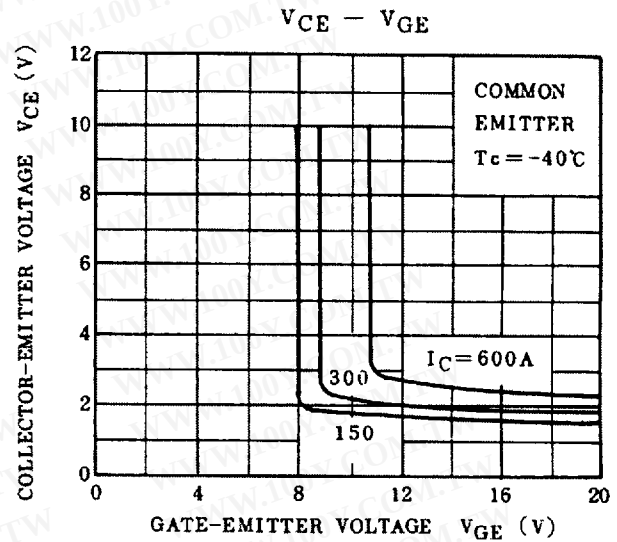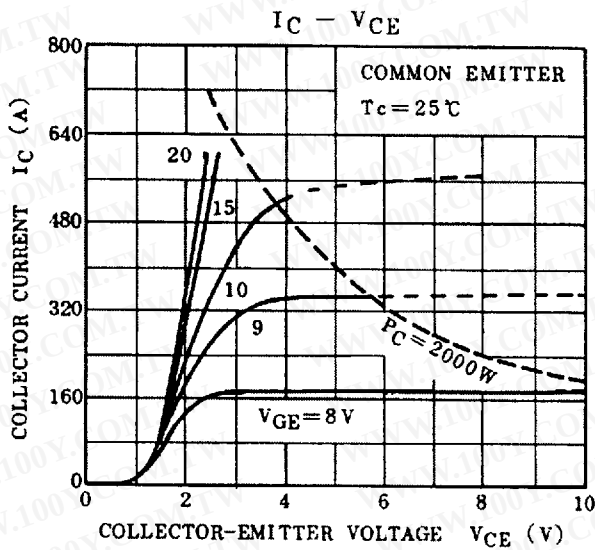


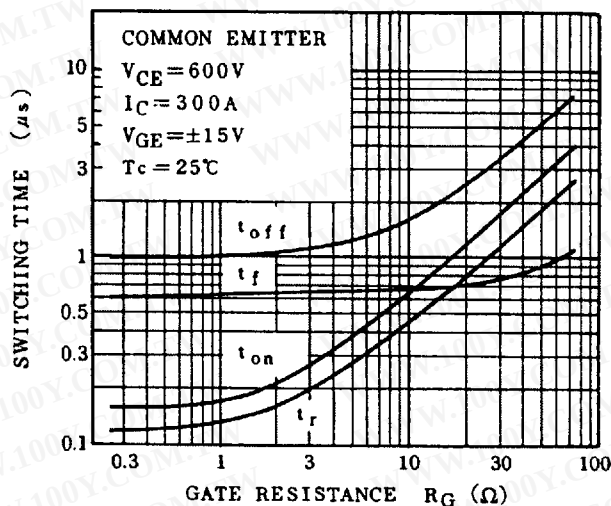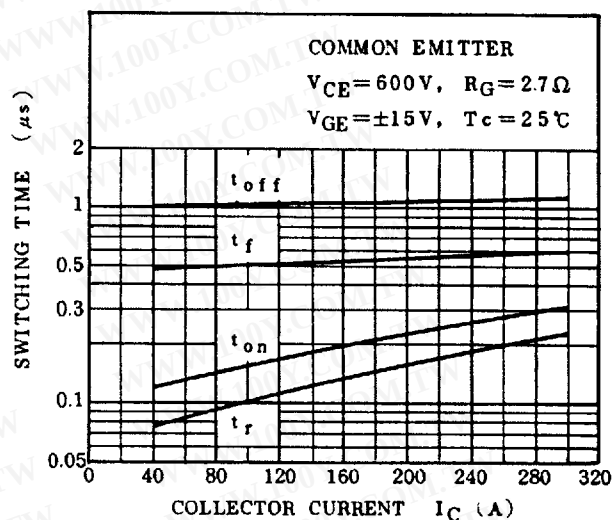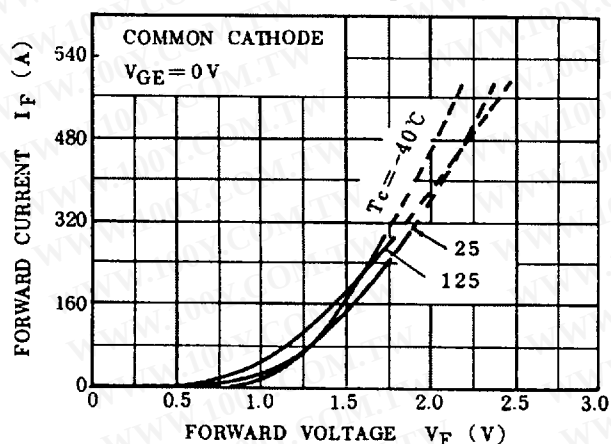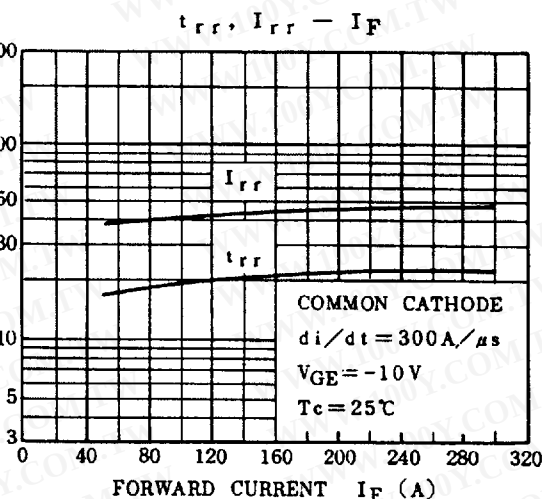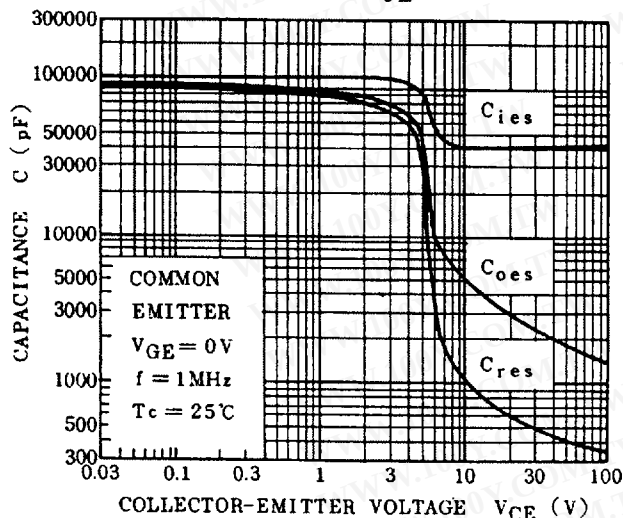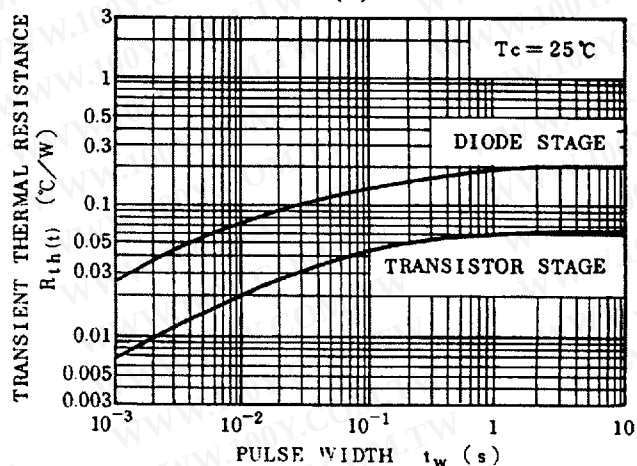SWITCHING TIME - R_G SWITCHING TIME - I_C  $I_F - V_F$ PEAK REVERSE RECOVERY CURRENT I_{rr} (A)
REVERSE RECOVERY TIME t_{rr} ($\times 10ns$) $C - V_{CE}$  $R_{th}(t) - t_w$ 

SAFE OPERATING AREA

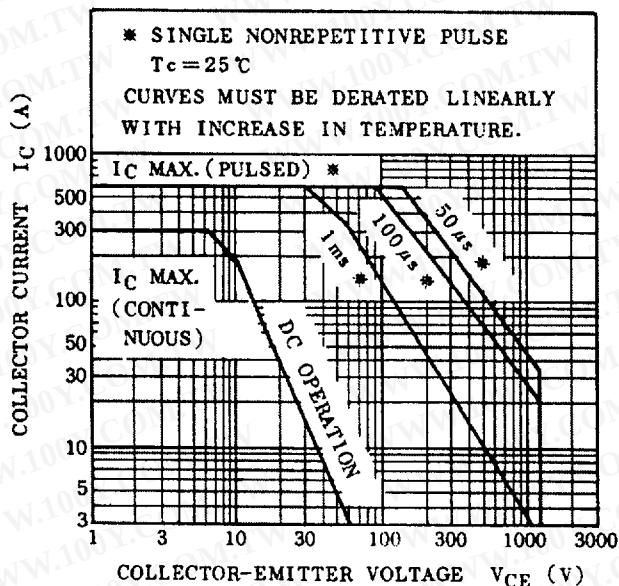

REVERSE BIAS SOA

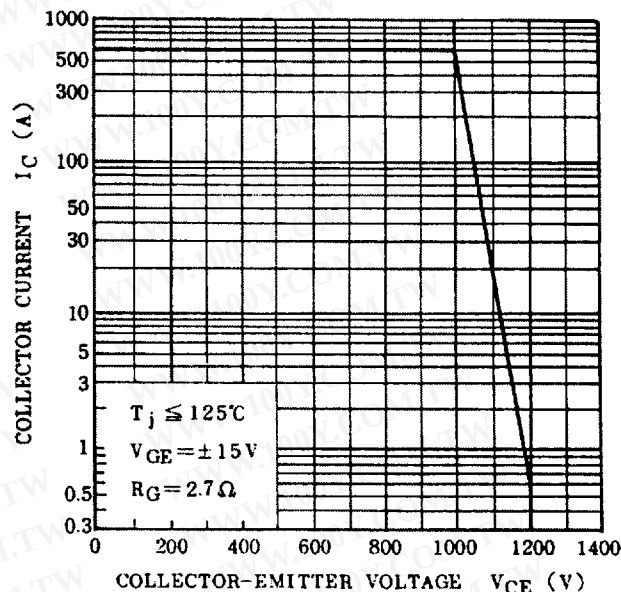

勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-54151736
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

The information contained here is subject to change without notice.

The information contained herein is presented only as guide for the applications of our products. No responsibility is assumed by TOSHIBA for any infringements of patents or other rights of the third parties which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of TOSHIBA or others. These TOSHIBA products are intended for usage in general electronic equipments (office equipment, communication equipment, measuring equipment, domestic electrification, etc.) Please make sure that you consult with us before you use these TOSHIBA products in equipments which require high quality and/or reliability, and in equipments which could have major impact to the welfare of human life (atomic energy control, spaceship, traffic signal, combustion control, all types of safety devices, etc.). TOSHIBA cannot accept liability to any damage which may occur in case these TOSHIBA products were used in the mentioned equipments without prior consultation with TOSHIBA.