

MINI USB / 4 PIN / RECEPTACLE / SMT A TYPE

MATERIAL SPECIFICATION

SHELL	COPPER ALLOY
HOUSING	Thermoplastic,UL94V-0
COLOR	BLACK,BEIGE
CONTACT	COPPER ALLOY



ELECTRICAL CHARACTERISTIC

VOLTAGE CURRENT RATING	1 AMP,30V AC
INSULATION RESISTANCE	100M Ω Min.
CONTACT RESISTANCE	50m Ω Max.
DIELECTRIC WITHSTANDING VOLTAGE	100V AC
TEMPERATURE RANGE	-20 $^{\circ}$ C TO+85 $^{\circ}$ C

勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-54151736
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)







PART NO. SPECIFICATION

MUNF - 04 * N - * H **

- 01:TYPE ••
- 02:TYPE ••
- 03:TYPE ••

B:BLACK
 E:BEIGE

- 1 :GOLD FLASH
- 2 :Au 3 μ "
- 6 :Au 30 μ "••

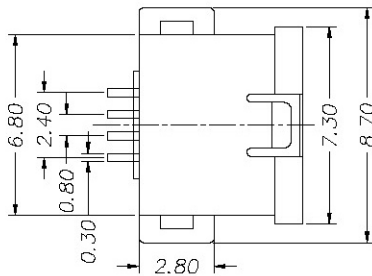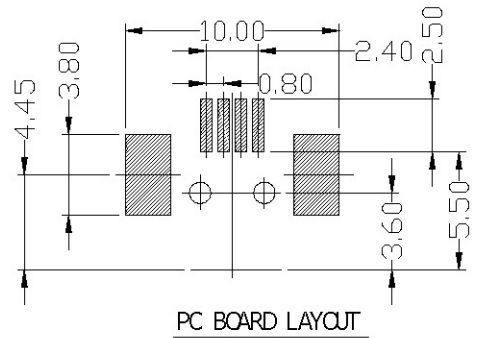

MINI USB / 4 PIN / RECEPTACLE / SMT B TYPE

MATERIAL SPECIFICATION

SHELL	COPPER ALLOY
HOUSING	Thermoplastic,UL94V-0
COLOR	BLACK
CONTACT	COPPER ALLOY



ELECTRICAL CHARACTERISTIC



VOLTAGE CURRENT RATING	1 AMP,30V AC
INSULATION RESISTANCE	100MΩ Min.
CONTACT RESISTANCE	50mΩ Max.
DIELECTRIC WITHSTANDING VOLTAGE	100V AC
TEMPERATURE RANGE	-20℃ TO+85℃

勝特力材料 886-3-5753170
勝特力电子(上海) 86-21-54151736
勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

PART NO. SPECIFICATION

MUBF - 04 * N - BH00


- 1 : GOLD FLASH
- 2 : Au 3 μ"
- 6 : Au 30 μ"••

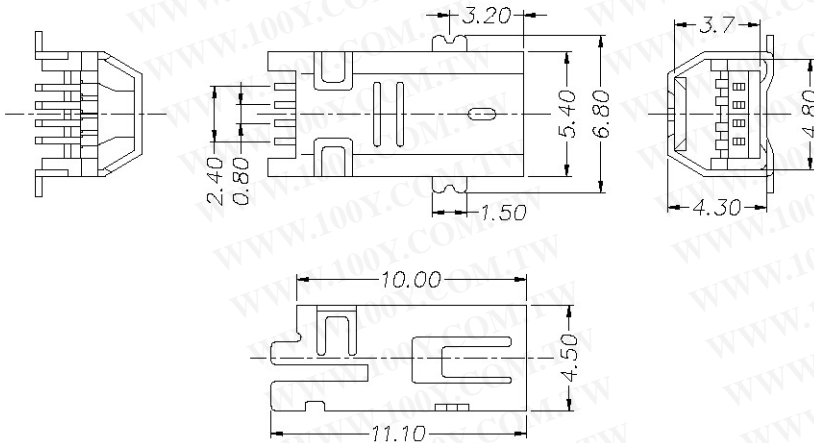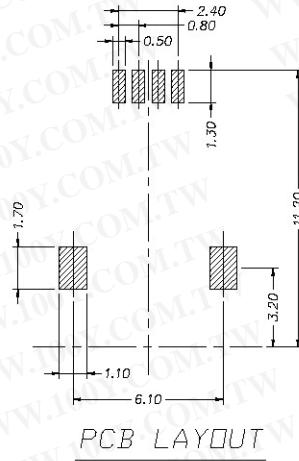

MINI USB / 5 PIN / RECEPTACLE / SMT AB TYPE

MATERIAL SPECIFICATION

SHELL	COPPER ALLOY
HOUSING	Thermoplastic,UL94V-0
COLOR	BLACK
CONTACT	COPPER ALLOY

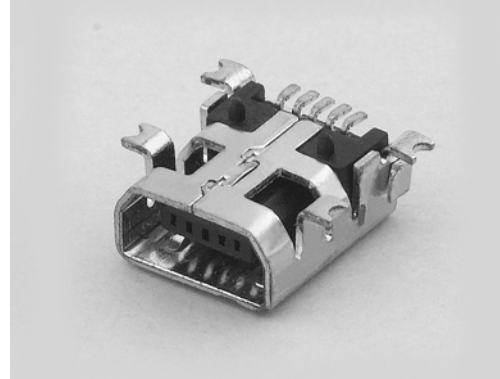

ELECTRICAL CHARACTERISTIC


VOLTAGE CURRENT RATING	1 AMP,30V AC
INSULATION RESISTANCE	100M Ω Min.
CONTACT RESISTANCE	50m Ω Max.
DIELECTRIC WITHSTANDING VOLTAGE	100V AC
TEMPERATURE RANGE	-20 $^{\circ}$ C TO+85 $^{\circ}$ C

PART NO. SPECIFICATION




MUNF - 05 * N - B H * *

- 00:A=1.00
- 01:A=0.70
- 1 :GOLD FLASH
- 2 :Au 3 μ "
- 6 :Au 30 μ "••

勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-54151736
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

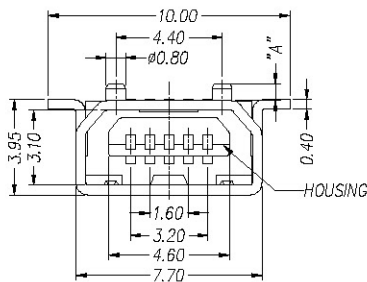

DIM "A"
1.00
0.70

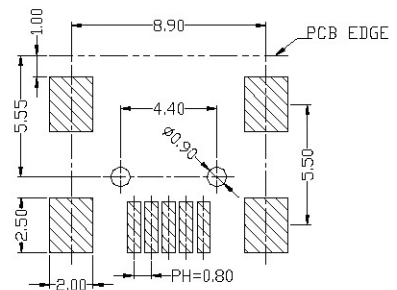

PCB LAYOUT

MINI USB / 5 PIN / RECEPTACLE / SMT B TYPE

MATERIAL SPECIFICATION

SHELL	COPPER ALLOY
HOUSING	Thermoplastic,UL94V-0
COLOR	BLACK
CONTACT	COPPER ALLOY



ELECTRICAL CHARACTERISTIC





VOLTAGE CURRENT RATING	1 AMP,30V AC
INSULATION RESISTANCE	100M Ω Min.
CONTACT RESISTANCE	50m Ω Max.
DIELECTRIC WITHSTANDING VOLTAGE	100V AC
TEMPERATURE RANGE	-20 $^{\circ}$ C TO+85 $^{\circ}$ C

PART NO. SPECIFICATION

MUBF - 05 * N - BH **

- 00:A=1.00
- 01:A=0.70
- 1 :GOLD FLASH
- 2 :Au 3 μ "
- 6 :Au 30 μ "••

勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-54151736
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

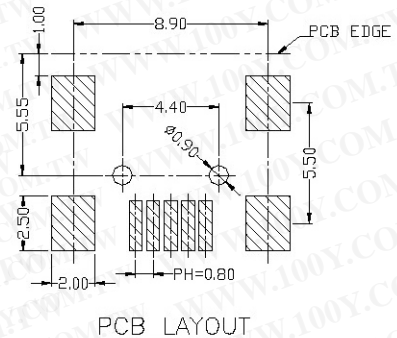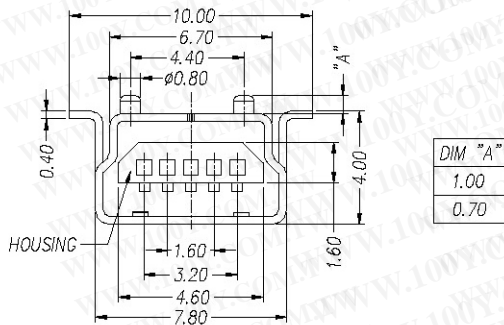

MINI USB / 5 PIN / RECEPTACLE / 90° DIP B TYPE

MATERIAL SPECIFICATION

SHELL	COPPER ALLOY
HOUSING	Thermoplastic,UL94V-0
COLOR	BLACK
CONTACT	COPPER ALLOY

ELECTRICAL CHARACTERISTIC



VOLTAGE CURRENT RATING	1 AMP,30V AC
INSULATION RESISTANCE	100M Ω Min.
CONTACT RESISTANCE	50m Ω Max.
DIELECTRIC WITHSTANDING VOLTAGE	100V AC
TEMPERATURE RANGE	-20°C TO+85°C

PART NO. SPECIFICATION

MUBF - 05 * N - BR **

00:TYPE 1
02:TYPE 2





1 :GOLD FLASH
2 :Au 3 μ "
6 :Au 30 μ "••

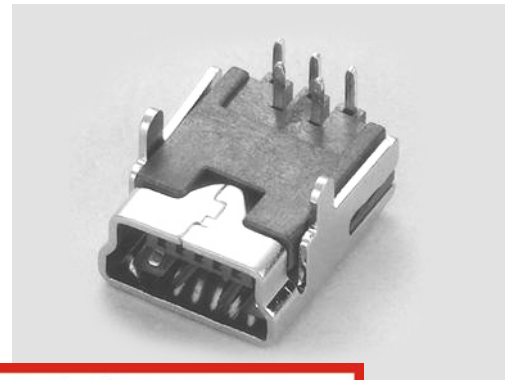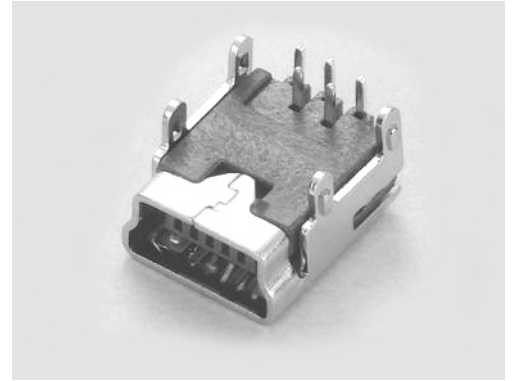

勝特力材料 886-3-5753170
勝特力电子(上海) 86-21-54151736
勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

TYPE 1


TYPE 2

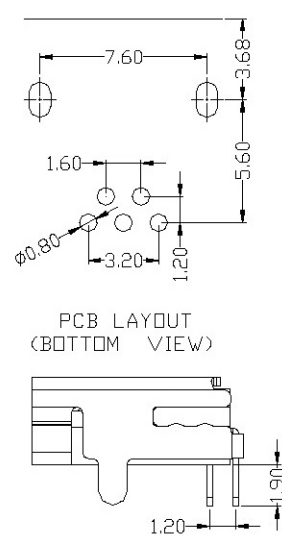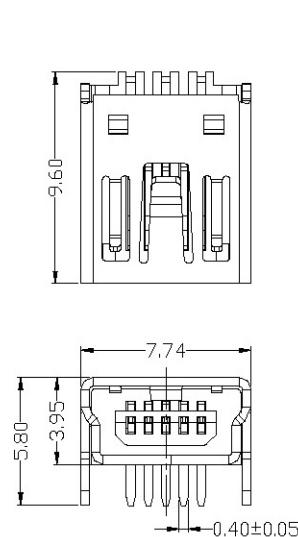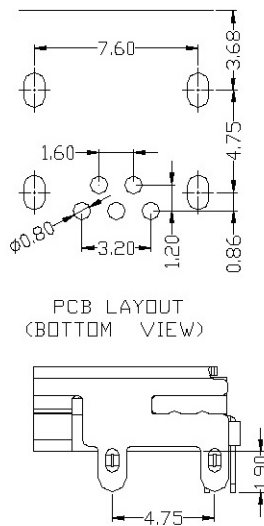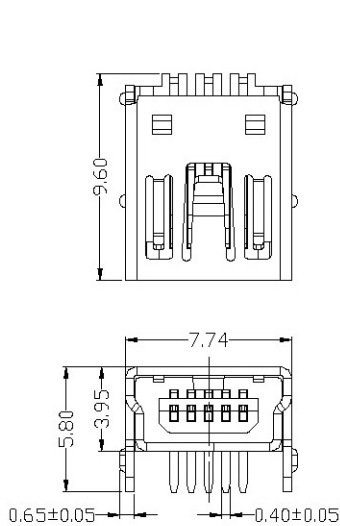

MINI USB / 5 PIN / RECEPTACLE / 180°DIP B TYPE

MATERIAL SPECIFICATION

SHELL	COPPER ALLOY
HOUSING	Thermoplastic,UL94V-0
COLOR	BLACK
CONTACT	COPPER ALLOY

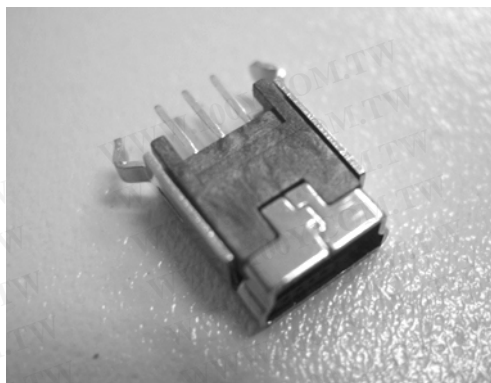

ELECTRICAL CHARACTERISTIC



VOLTAGE CURRENT RATING	1 AMP,30V AC
INSULATION RESISTANCE	100M Ω Min.
CONTACT RESISTANCE	50m Ω Max.
DIELECTRIC WITHSTANDING VOLTAGE	100V AC
TEMPERATURE RANGE	-20°C TO+85°C

PART NO. SPECIFICATION

MUBF - 05 * N - BP00

- 1 :GOLD FLASH
- 2 :Au 3 μ "
- 6 :Au 30 μ "••

勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-54151736
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

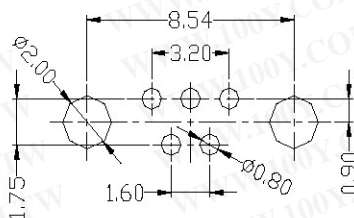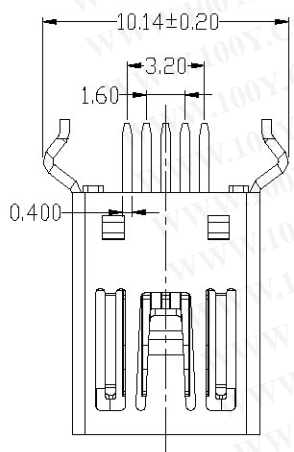

PCB LAYOUT
(BOTTOM VIEW)

