

勝特力材料 886-3-5753170
勝特力电子(上海) 86-21-54151736
勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

Designer's™ Data Sheet

NPN Silicon Power Transistors

1.5 kV SWITCHMODE Series

These transistors are designed for high-voltage, high-speed, power switching in inductive circuits where fall time is critical. They are particularly suited for line-operated switchmode applications.

Typical Applications:


Features:

- Switching Regulators
- Inverters
- Solenoids
- Relay Drivers
- Motor Controls
- Deflection Circuits
- Collector-Emitter Voltage — $V_{CEV} = 1500 \text{ Vdc}$
- Fast Turn-Off Times
 - 80 ns Inductive Fall Time — 100°C (Typ)
 - 110 ns Inductive Crossover Time — 100°C (Typ)
 - 4.5 μs Inductive Storage Time — 100°C (Typ)
- 100°C Performance Specified for:
 - Reverse-Biased SOA with Inductive Load
 - Switching Times with Inductive Loads
 - Saturation Voltages
 - Leakage Currents

MJ16018*
MJW16018*

*Motorola Preferred Device

POWER TRANSISTORS
10 AMPERES
800 VOLTS
125 AND 175 WATTS



MAXIMUM RATINGS

Rating	Symbol	MJ16018	MJW16018	Unit
Collector-Emitter Voltage	$V_{CEO(sus)}$	800		Vdc
Collector-Emitter Voltage	V_{CEV}	1500		Vdc
Emitter-Base Voltage	V_{EB}	6		Vdc
Collector Current — Continuous	I_C	10		Adc
Collector Current — Peak(1)	I_{CM}	15		Adc
Base Current — Continuous	I_B	8		Adc
Base Current — Peak(1)	I_{BM}	12		Adc
Total Power Dissipation @ $T_C = 25^\circ\text{C}$ @ $T_C = 100^\circ\text{C}$ Derate above $T_C = 25^\circ\text{C}$	P_D	175 100 1	125 50 1	Watts W/ $^\circ\text{C}$
Operating and Storage Junction Temperature Range	T_J, T_{stg}	-65 to 200	-55 to 150	$^\circ\text{C}$

THERMAL CHARACTERISTICS


Characteristic	Symbol	Max		Unit
Thermal Resistance, Junction to Case	$R_{\theta JC}$	1	1	$^\circ\text{C/W}$
Lead Temperature for Soldering Purposes: 1/8" from Case for 5 Seconds	T_L	275		$^\circ\text{C}$

(1) Pulse Test: Pulse Width = 5 μs , Duty Cycle $\leq 10\%$.


Designer's Data for "Worst Case" Conditions — The Designer's Data Sheet permits the design of most circuits entirely from the information presented. SOA Limit curves — representing boundaries on device characteristics — are given to facilitate "worst case" design.

Preferred devices are Motorola recommended choices for future use and best overall value.

Designer's and SWITCHMODE are trademarks of Motorola, Inc.



CASE 1-07
TO-204AA
MJ16018



CASE 340F-03
TO-247AE
MJW16018

ELECTRICAL CHARACTERISTICS ($T_C = 25^\circ\text{C}$ unless otherwise noted)

Characteristic	Symbol	Min	Typ	Max	Unit
Collector-Emitter Sustaining Voltage (Table 1) ($I_C = 50\text{ mA}$, $I_B = 0$)	$V_{CE(sus)}$	800	—	—	Vdc
Collector Cutoff Current ($V_{CEV} = 1500\text{ Vdc}$, $V_{BE(off)} = 1.5\text{ Vdc}$) ($V_{CEV} = 1500\text{ Vdc}$, $V_{BE(off)} = 1.5\text{ Vdc}$, $T_C = 100^\circ\text{C}$)	I_{CEV}	— —	— —	0.25 1.5	mAdc
Collector Cutoff Current ($V_{CE} = 1500\text{ Vdc}$, $R_{BE} = 50\ \Omega$, $T_C = 100^\circ\text{C}$)	I_{CER}	—	—	2.5	mAdc
Emitter Cutoff Current ($V_{EB} = 6\text{ Vdc}$, $I_C = 0$)	I_{EBO}	—	—	0.1	mAdc

SECOND BREAKDOWN

Second Breakdown Collector Current with Base Forward Biased	$I_{S/b}$	See Figure 13			
Clamped Inductive SOA with Base Reverse Biased	$RBSOA$	See Figure 14			

ON CHARACTERISTICS(1)

Collector-Emitter Saturation Voltage ($I_C = 5\text{ Adc}$, $I_B = 2\text{ Adc}$) ($I_C = 10\text{ Adc}$, $I_B = 5\text{ Adc}$) ($I_C = 5\text{ Adc}$, $I_B = 2\text{ Adc}$, $T_C = 100^\circ\text{C}$)	$V_{CE(sat)}$	— — —	— — —	1 5 1.5	Vdc
Base-Emitter Saturation Voltage ($I_C = 5\text{ Adc}$, $I_B = 2\text{ Adc}$) ($I_C = 5\text{ Adc}$, $I_B = 2\text{ Adc}$, $T_C = 100^\circ\text{C}$)	$V_{BE(sat)}$	— —	— —	1.5 1.5	Vdc
DC Current Gain ($I_C = 5\text{ Adc}$, $V_{CE} = 5\text{ Vdc}$)	h_{FE}	4	—	—	—

DYNAMIC CHARACTERISTICS

Output Capacitance ($V_{CB} = 10\text{ Vdc}$, $I_E = 0$, $f_{test} = 1\text{ kHz}$)	C_{ob}	—	—	450	pF
---	----------	---	---	-----	----

SWITCHING CHARACTERISTICS

Inductive Load (Table 1)							
Storage Time	Baker Clamped ($I_C = 5\text{ Adc}$, $I_{B1} = 2\text{ Adc}$, $V_{BE}(\text{off}) = 2\text{ Vdc}$, $V_{CE}(\text{pk}) = 400\text{ Vdc}$ $PW = 25\text{ }\mu\text{s}$)	$(T_J = 25^\circ\text{C})$	t_{sv}	—	4000	8000	ns
Fall Time			t_{fi}	—	60	200	
Crossover Time			t_c	—	90	300	
Storage Time		$(T_J = 100^\circ\text{C})$	t_{sv}	—	4500	9000	
Fall Time			t_{fi}	—	80	250	
Crossover Time			t_c	—	110	375	
Resistive Load (Table 1)							
Delay Time	Baker Clamped ($I_C = 5\text{ Adc}$, $V_{CC} = 250\text{ Vdc}$, $I_{B1} = 2\text{ Adc}$, $I_{B2} = 2\text{ Adc}$, $R_{B2} = 3\text{ }\Omega$, $PW = 25\text{ }\mu\text{s}$, Duty Cycle $\leq 2\%$)	t_d	—	85	200	ns	
Rise Time		t_r	—	900	2000		
Storage Time		t_s	—	4500	9000		
Fall Time		t_f	—	200	400		


(1) Pulse Test: $PW = 300\ \mu\text{s}$, Duty Cycle $\leq 2\%$.

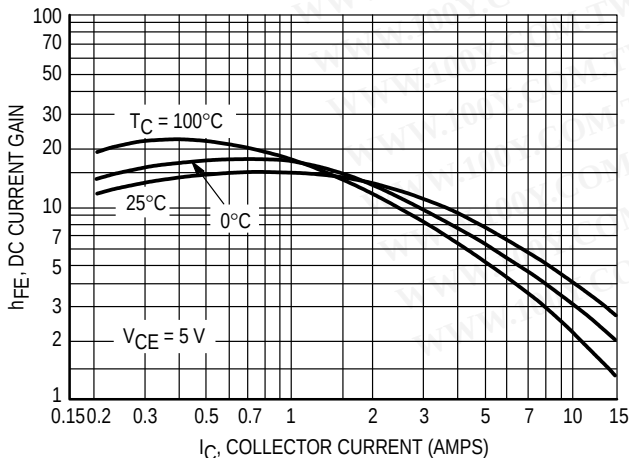Figure 1. DC Current Gain

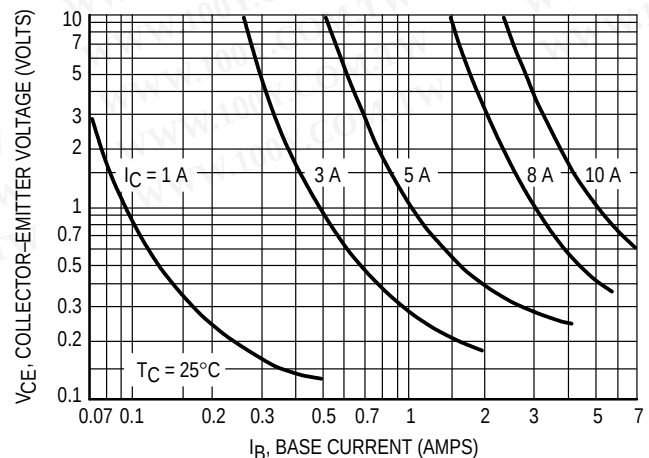


Figure 2. Collector Saturation Region

TYPICAL STATIC CHARACTERISTICS

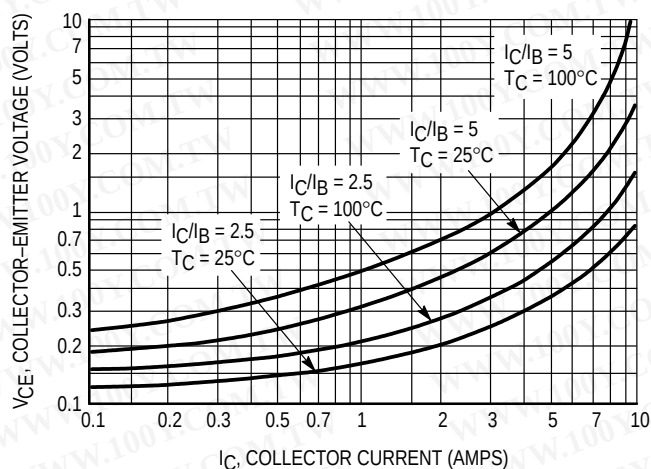


Figure 3. Collector-Emitter Saturation Region

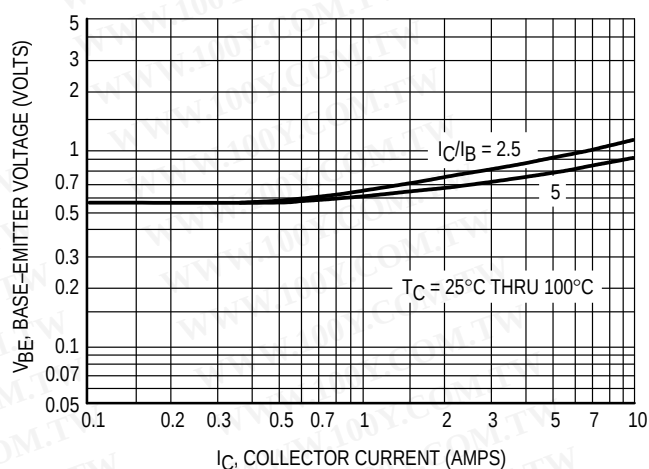


Figure 4. Base-Emitter Saturation Region

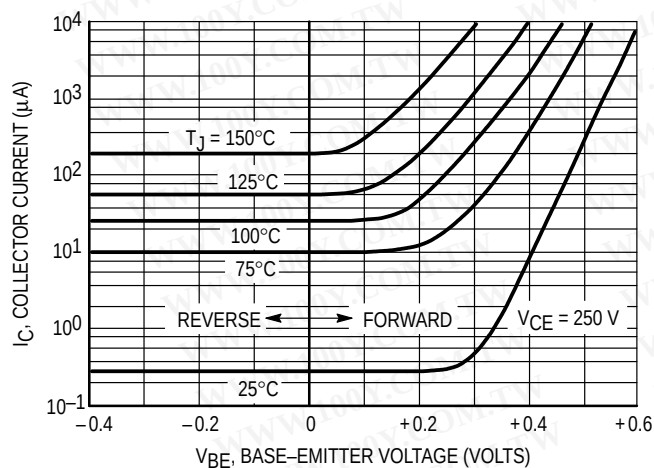


Figure 5. Collector Cutoff Region

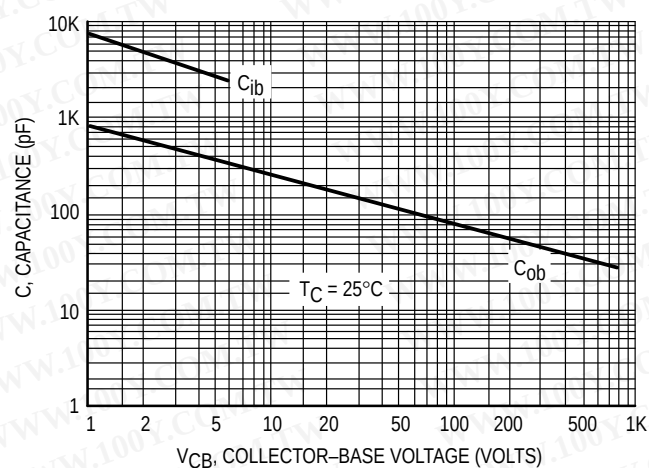


Figure 6. Typical Capacitance

TYPICAL INDUCTIVE SWITCHING CHARACTERISTICS

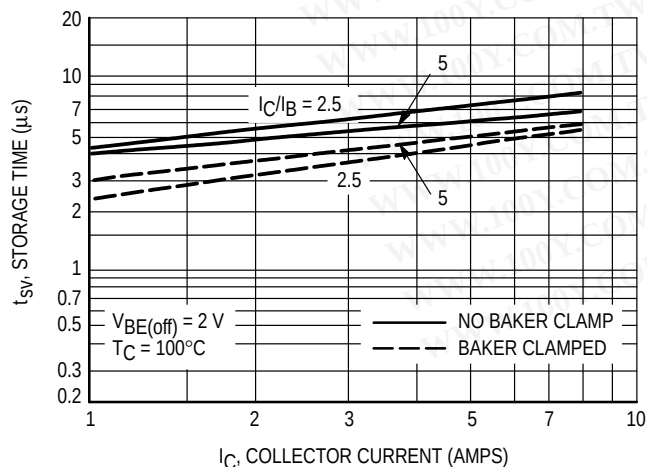


Figure 7. Storage Time

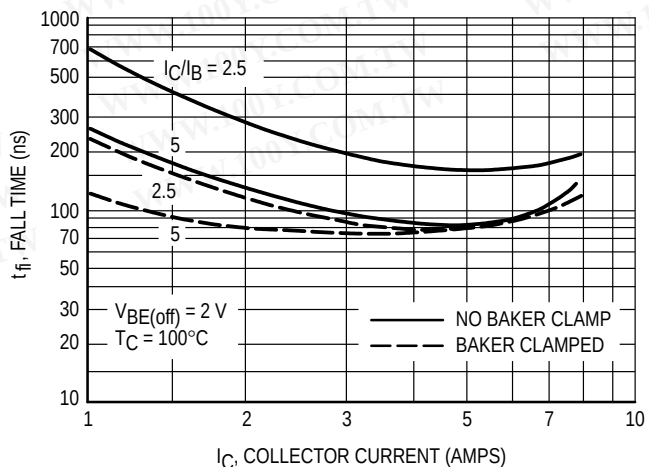


Figure 8. Inductive Switching Fall Time

TYPICAL INDUCTIVE SWITCHING CHARACTERISTICS

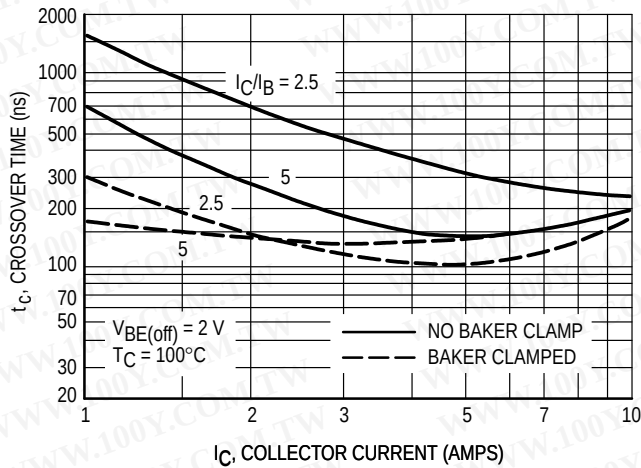


Figure 9. Inductive Switching Crossover Time

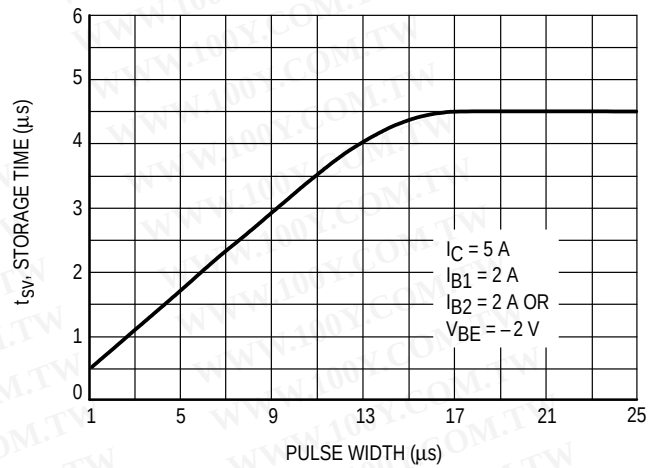


Figure 10. (t_{sv}) Storage Time versus I_{B1} Pulse Width

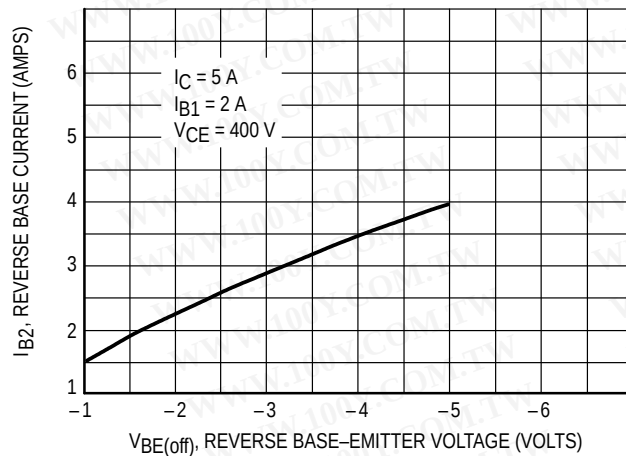


Figure 11. Reverse Base Current versus Off Voltage

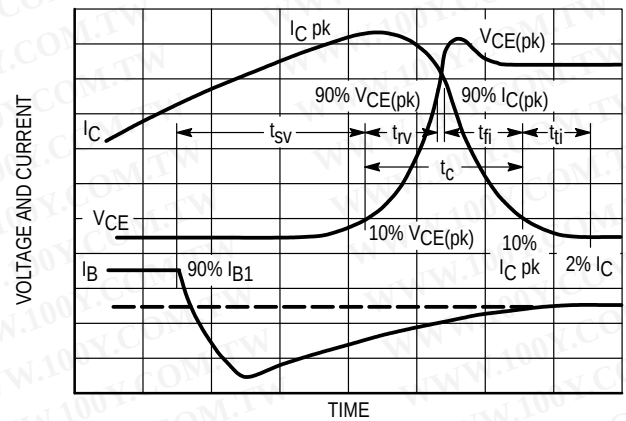


Figure 12. Inductive Switching Measurements

GUARANTEED SAFE OPERATING AREA LIMITS

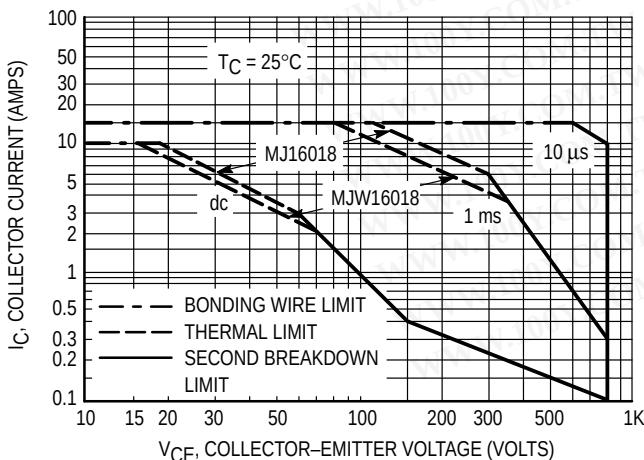


Figure 13. Maximum Forward Bias Safe Operating Area

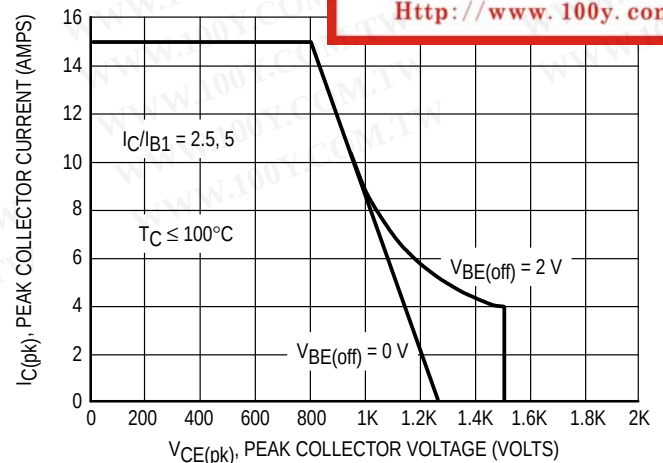


Figure 14. Maximum Reverse Bias Safe Operating Area

勝特力材料 886-3-5753170
勝特力电子(上海) 86-21-54151736
勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

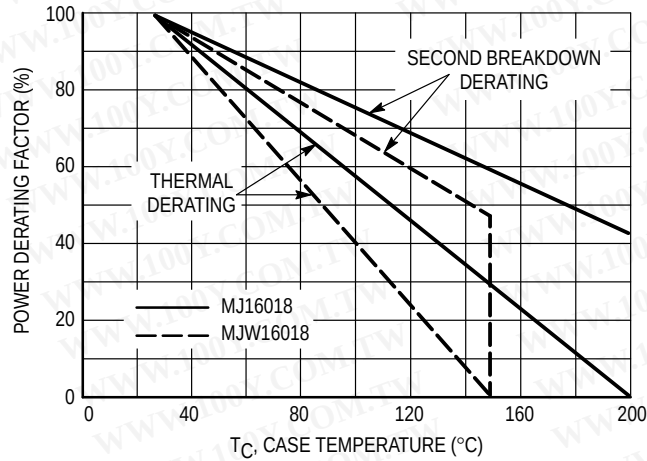


Figure 15. Power Derating

勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-54151736
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

SAFE OPERATING AREA INFORMATION

FORWARD BIAS

There are two limitations on the power handling ability of a transistor: average junction temperature and second breakdown. Safe operating area curves indicate $I_C - V_{CE}$ limits of the transistor that must be observed for reliable operation; i.e., the transistor must not be subjected to greater dissipation than the curves indicate.

The data of Figure 13 is based on $T_C = 25^\circ\text{C}$; $T_J(\text{pk})$ is variable depending on power level. Second breakdown pulse limits are valid for duty cycles to 10% but must be derated when $T_C \geq 25^\circ\text{C}$. Second breakdown limitations do not derate the same as thermal limitations. Allowable current at the voltages shown on Figure 13 may be found at any case temperature by using the appropriate curve on Figure 15.

$T_J(\text{pk})$ may be calculated from the data in Figure 16. At high case temperatures, thermal limitations will reduce the

power that can be handled to values less than the limitations imposed by second breakdown.

REVERSE BIAS

For inductive loads, high voltage and high current must be sustained simultaneously during turn-off, in most cases, with the base-to-emitter junction reverse biased. Under these conditions the collector voltage must be held to a safe level at or below a specific value of collector current. This can be accomplished by several means such as active clamping, RC snubbing, load line shaping, etc. The safe level for these devices is specified as Reverse Bias Safe Operating Area and represents the voltage current condition allowable during reverse biased turnoff. This rating is verified under clamped conditions so that the device is never subjected to an avalanche mode. Figure 14 gives the RBSOA characteristics.

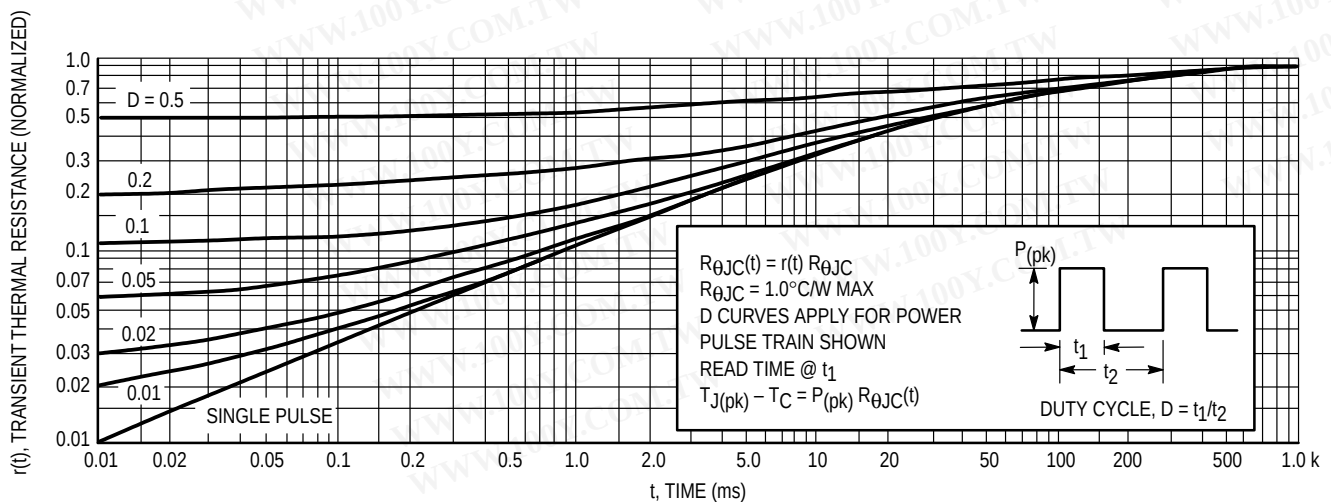
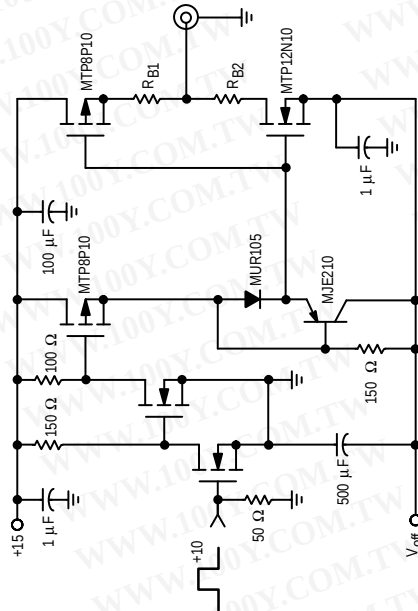


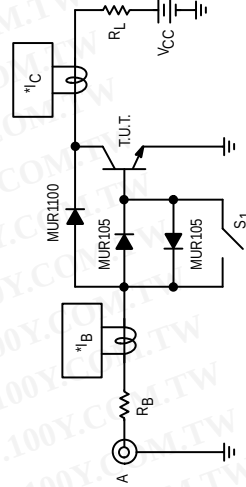



Figure 16. Thermal Response

Table 1. Test Conditions for Dynamic Performance

V _{CEO} (sus)	RBSOA	Inductive Switching	Resistive Switching
Drive Circuit  Note: Adjust V_{off} to obtain desired V_{BE}(off) at Point A	L = 10 mH R_{B2} = ∞ V_{CC} = 20 Volts I_C(pk) = 50 mA S₁ Closed L = 200 μH R_{B2} = 0 V_{CC} = 20 Volts R_{B1} selected for desired I_{B1} S₁ Closed	L = 200 μH R_{B2} = 0 when V_{BE}(off) is specified or selected for desired I_{B2} V_{CC} ≈ 20 Volts, Adjusted to obtain desired I_C R_{B1} selected for desired I_{B1} S₁ = Open for baker clamp condition 	For t_d and t_f: H.P. 214 OR EQUIV. P.G. 50 Ω  For t_s and t_r: Inductive Switching Drive Circuit V_{in} ≈ 11 V t_r ≤ 15 ns for t_d and t_r V_{CC} = 250 Volts R_B selected for desired I_{B1} R_L selected for desired I_C for t_s and t_f V_{CC} = 250 Volts R_B = 0 R_{B1} & R_{B2} selected for I_{B1} & I_{B2} R_L selected for desired I_C  *Tektronix AM503 P6302 or Equivalent
Input Conditions	Circuit Values	Test Circuit	

勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-54151736
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

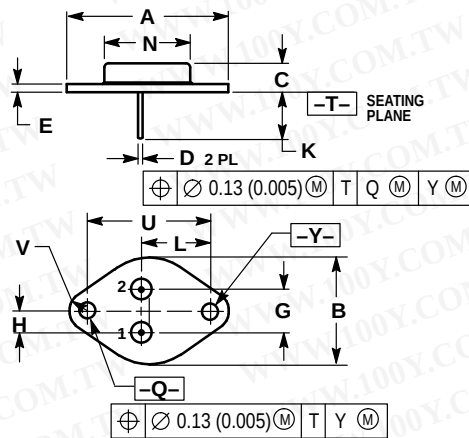PACKAGE DIMENSIONS




- NOTES:
1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
 2. CONTROLLING DIMENSION: INCH.
 3. ALL RULES AND NOTES ASSOCIATED WITH REFERENCED TO-204AA OUTLINE SHALL APPLY.

DIM	INCHES		MILLIMETERS	
	MIN	MAX	MIN	MAX
A	1.550 REF		39.37 REF	
B		1.050		26.67
C	0.250	0.335	6.35	8.51
D	0.038	0.043	0.97	1.09
E	0.055	0.070	1.40	1.77
G	0.430 BSC		10.92 BSC	
H	0.215 BSC		5.46 BSC	
K	0.440	0.480	11.18	12.19
L	0.665 BSC		16.89 BSC	
N		0.830		21.08
Q	0.151	0.165	3.84	4.19
U	1.187 BSC		30.15 BSC	
V	0.131	0.188	3.33	4.77

STYLE 1:
PIN 1. BASE
2. EMITTER
CASE: COLLECTOR

CASE 1-07
TO-204AA (TO-3)
ISSUE Z

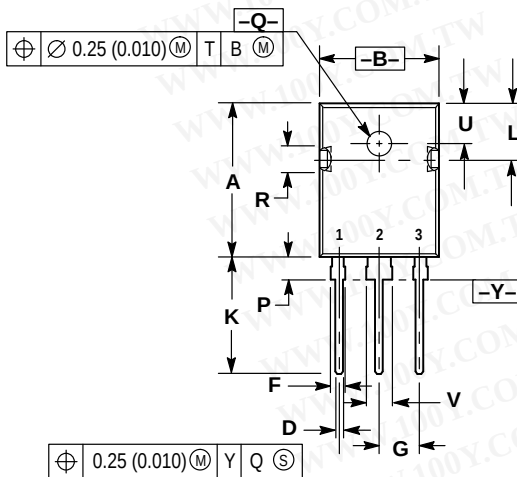勝特力材料 886-3-5753170
勝特力电子(上海) 86-21-54151736
勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)



- NOTES:
1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
 2. CONTROLLING DIMENSION: MILLIMETER.

DIM	MILLIMETERS		INCHES	
	MIN	MAX	MIN	MAX
A	20.40	20.90	0.803	0.823
B	15.44	15.95	0.608	0.628
C	4.70	5.21	0.185	0.205
D	1.09	1.30	0.043	0.051
E	1.50	1.63	0.059	0.064
F	1.80	2.18	0.071	0.086
G	5.45 BSC		0.215 BSC	
H	2.56	2.87	0.101	0.113
J	0.48	0.68	0.019	0.027
K	15.57	16.08	0.613	0.633
L	7.26	7.50	0.286	0.295
P	3.10	3.38	0.122	0.133
Q	3.50	3.70	0.138	0.145
R	3.30	3.80	0.130	0.150
U	5.30 BSC		0.209 BSC	
V	3.05	3.40	0.120	0.134

STYLE 3:
PIN 1. BASE
2. COLLECTOR
3. EMITTER
4. COLLECTOR

CASE 340F-03
TO-247AE
ISSUE E