


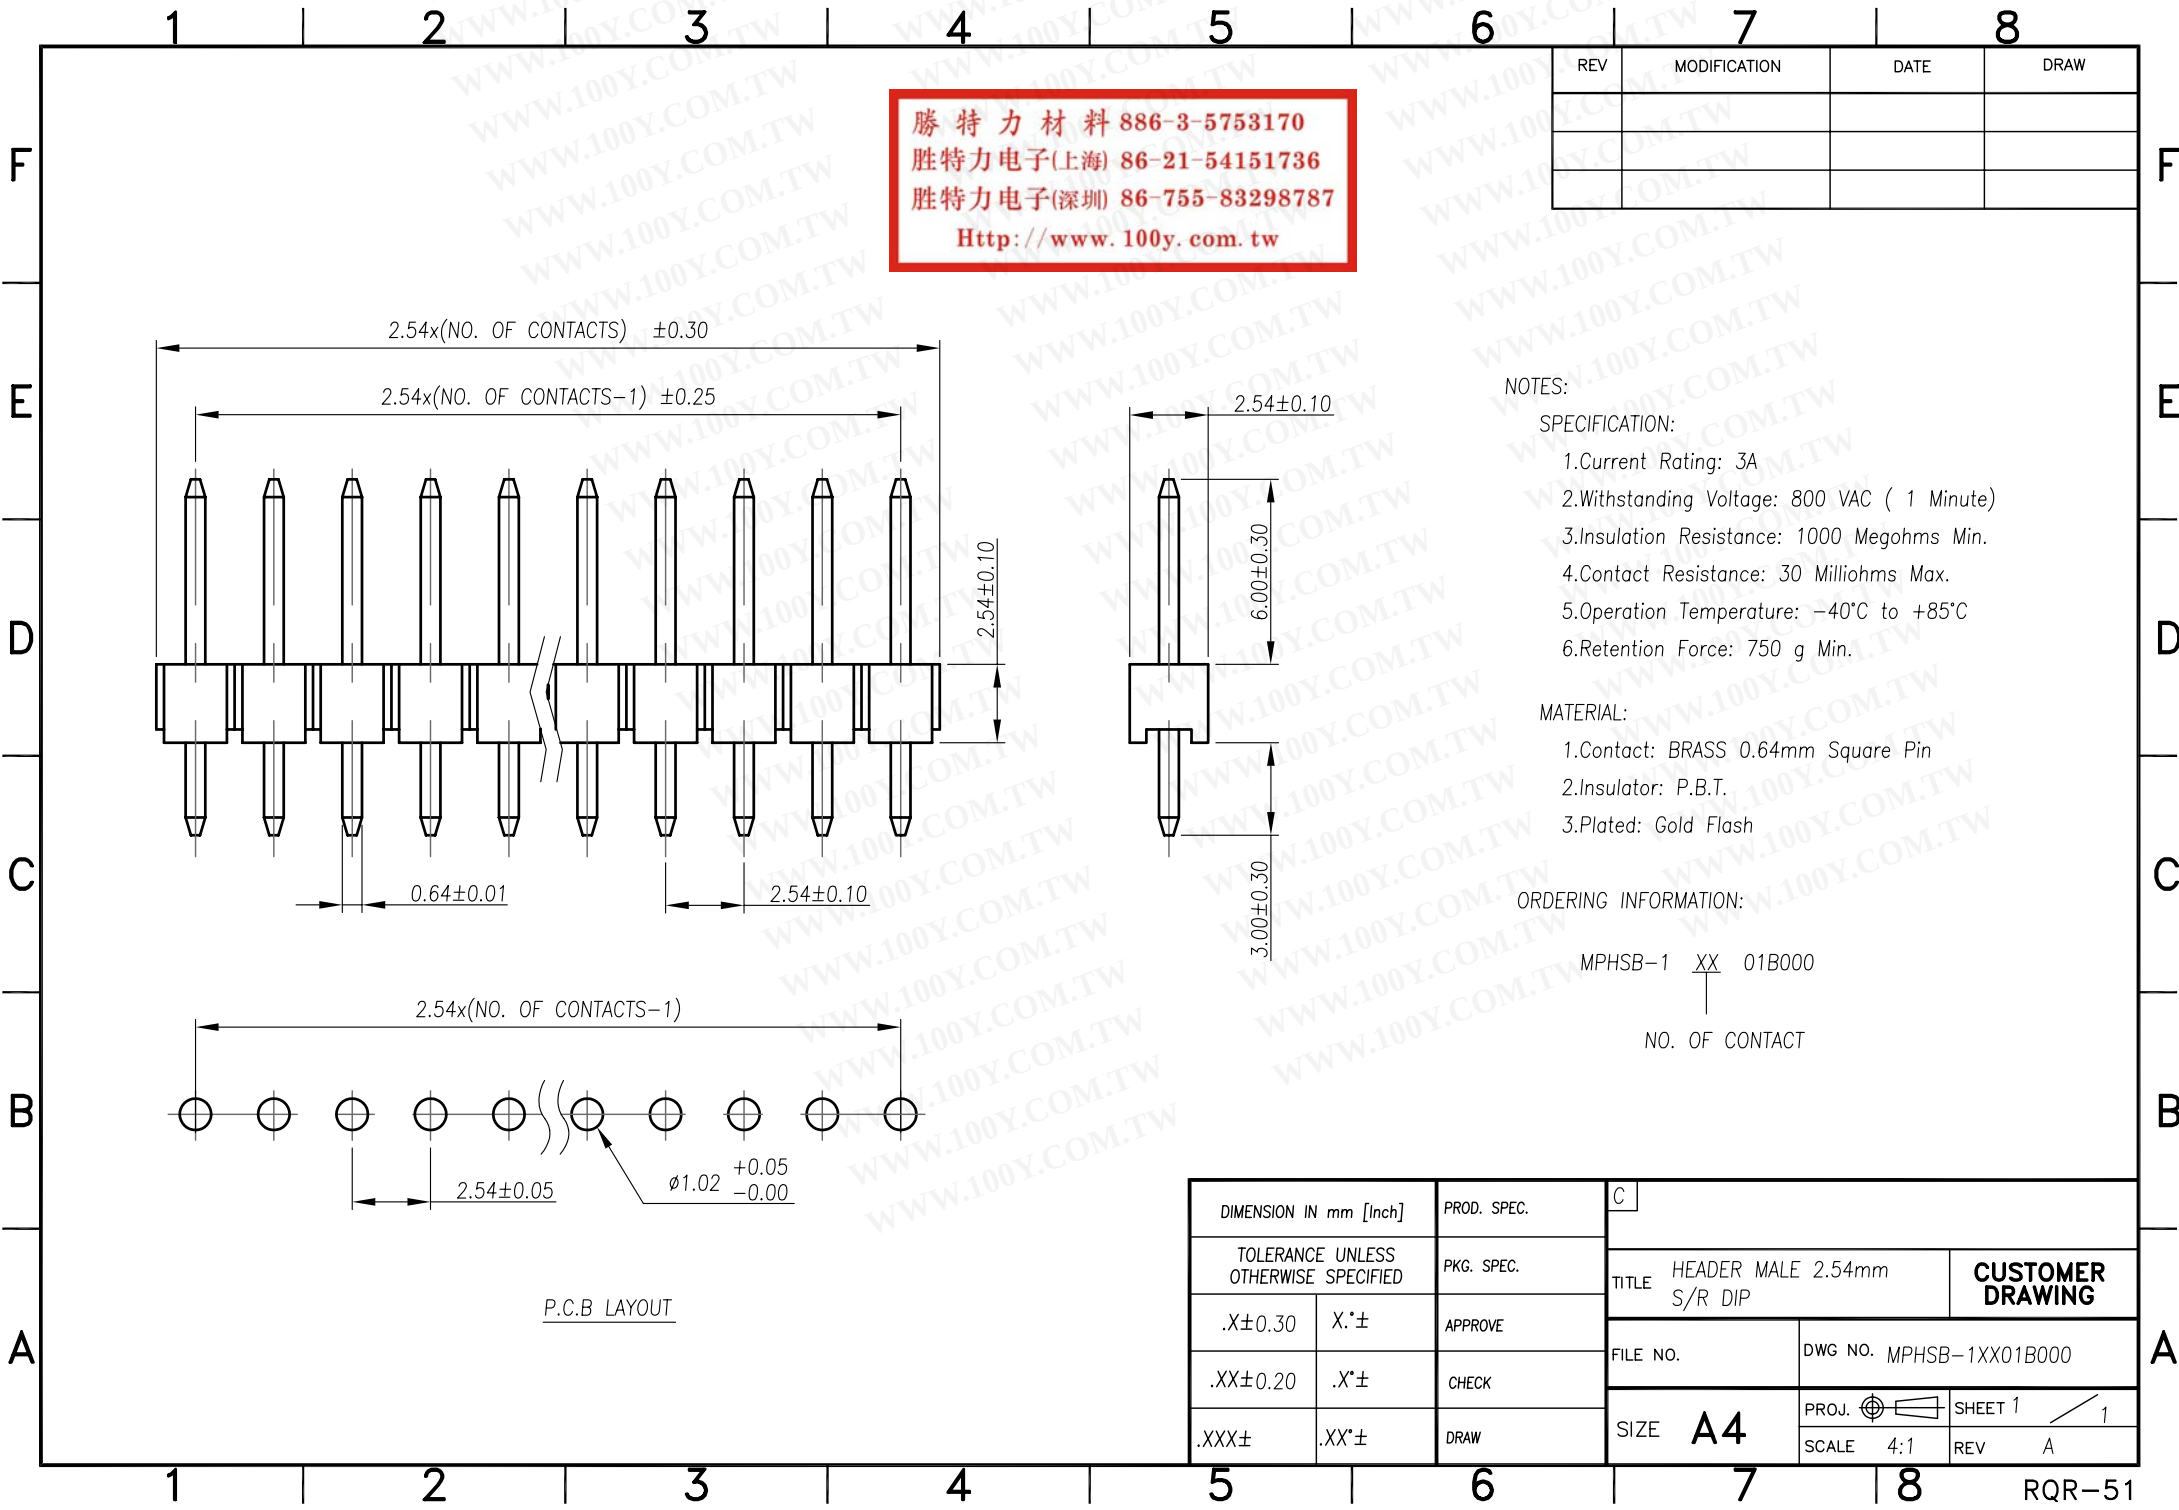

勝特力材料 886-3-5753170
勝特力电子(上海) 86-21-54151736
勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

REV	MODIFICATION	DATE	DRAW

- NOTES:
- SPECIFICATION:
- 1.Current Rating: 3A
 - 2.Withstanding Voltage: 800 VAC (1 Minute)
 - 3.Insulation Resistance: 1000 Megohms Min.
 - 4.Contact Resistance: 30 Milliohms Max.
 - 5.Operation Temperature: -40°C to +85°C
 - 6.Retention Force: 750 g Min.

- MATERIAL:
- 1.Contact: BRASS 0.64mm Square Pin
 - 2.Insulator: P.B.T.
 - 3.Plated: Gold Flash

ORDERING INFORMATION:

MPHSB-1 XX 01B000

NO. OF CONTACT

DIMENSION IN mm [Inch]		PROD. SPEC.	C	
TOLERANCE UNLESS OTHERWISE SPECIFIED		PKG. SPEC.	TITLE	
.X±0.30	X.*±	APPROVE	HEADER MALE 2.54mm S/R DIP	
.XX±0.20	.X.*±	CHECK	CUSTOMER DRAWING	
.XXX±	.XX.*±	DRAW	FILE NO.	
			DWG NO. MPHSB-1XX01B000	
			SIZE A4	
			PROJ.  SHEET 1 / 1	
			SCALE 4:1 REV A	