

Ceramic Low Pass Filter

DC to 850 MHz

勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-54151736
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

LFCN-900+ LFCN-900



CASE STYLE: FV1206

Model
 LFCN-900+
 LFCN-900
 LFCN-900D+
 LFCN-900D

Maximum Ratings

Operating Temperature	-55°C to 100°C
Storage Temperature	-55°C to 100°C
RF Power Input*	10W max. at 25°C
DC Current Input to Output	0.5A max. at 25°C


*Passband rating, derate linearly to 3.5W at 100°C ambient.

Pin Connections

RF IN	1**
RF OUT	3**
GROUND	2,4

**RF IN & RF OUT can be interchanged


Outline Drawing

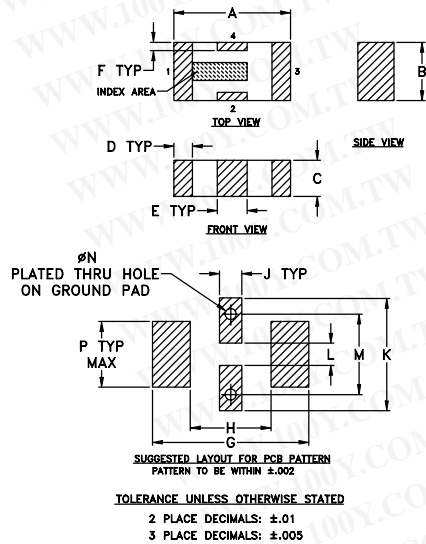

Outline Dimensions (inch)

A	B	C	D	E	F	G	H
.126	.063	.039	.020	.032	.009	.169	.087
3.20	1.60	0.99	0.51	0.81	0.23	4.29	2.21
J	K	L	M	N	P	wt.	
.024	.122	.024	.087	.012	.071	grams	
0.61	3.10	0.61	2.21	0.30	1.80	.020	

Demo Board MCL P/N: TB-270 Suggested PCB Layout (PL-137)

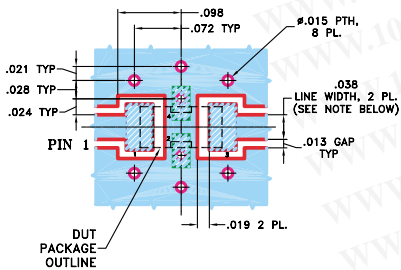

Features

- excellent power handling, 10W
- small size
- 7 sections
- temperature stable
- rejection in stopband, 45-50 dB typ.
- protected by US Patent 6,943,646

Applications

- harmonic rejection
- VHF/UHF transmitters/receivers
- lab use

+ RoHS compliant in accordance with EU Directive (2002/95/EC)


See our web site for RoHS Compliance methodologies and qualifications.

Low Pass Filter Electrical Specifications¹ (T_{AMB}=25°C)


MODEL NO.	PASSBAND (MHz) (loss <1.3 dB) Max.	f _{co} , MHz Nom. (loss 3 dB) Typ.	STOP BAND (MHz) (loss, dB)			VSWR (:1)		NO. OF SECTIONS
			f 20 Min.	30 Typ.	fr 20 Typ.	Stopband Typ.	Passband Typ.	
LFCN-900(+)	DC-850	1075	1275	1350-4850	5100	20	1.2	7

1. For Applications requiring DC voltage to be applied to the Input or output, use LFCN-900D (DC Resistance to ground is 100 Mohms min.)

typical frequency response





schematic



Typical Performance Data at 25°C

Frequency (MHz)	Insertion Loss (dB)	VSWR (:1)
100.00	0.14	1.04
500.00	0.35	1.06
1000.00	1.43	1.18
1075.00	2.52	1.48
1280.00	28.98	16.14
1360.00	33.79	21.44
1500.00	43.23	29.64
1600.00	50.48	34.26
3000.00	46.30	52.05
4000.00	43.04	64.96
5000.00	41.28	64.28
5300.00	23.36	47.10
6000.00	18.72	44.99
7000.00	19.93	41.97
8000.00	18.92	36.91

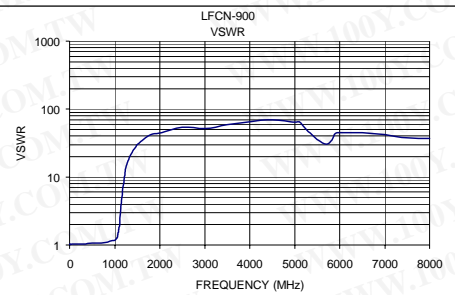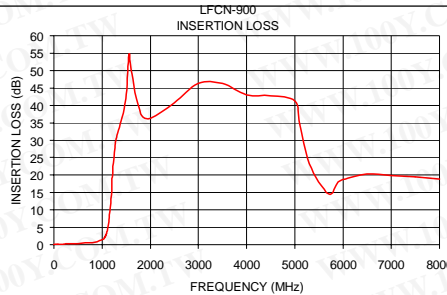

designers kit available

Kit No.	No. of Units in Kit	Description	Price \$ per Kit
K2-LFCN	60	5 of each: LFCN-800,-900,-1000,-1200,-1325,-1700,-2000,-2250,-2400,-5000,-6000,-6700	119.95



INTERNET <http://www.minicircuits.com>

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661

Distribution Centers NORTH AMERICA 800-654-7949 • 417-335-5935 • Fax 417-335-5945 • EUROPE 44-1252-832600 • Fax 44-1252-837010

Mini-Circuits ISO 9001 & ISO 14001 Certified



REV. F
 M100741
 LFCN-900
 EDR-6469/1
 RVN/AD/CP
 051010