

Inside Micrometers

SERIES 345, 145 — Caliper Type

FEATURES

- Caliper type jaws are made of high-grade, tool steel.
- Locking clamp for positive locking of spindle.
- Satin-chrome finished.
- A special holder is available to be used with Mitutoyo Micrometer Stand.



SPC



Technical Data

Accuracy: Refer to the list of specifications.
(excluding quantizing error for digital models)
Resolution*: 0.01mm or .00005"/0.001mm
Graduation**: 0.01mm or .001"
Measuring faces: Carbide tipped
Display*: LCD
Battery*: SR44 (1 pc.), **938882**
Battery life*: Approx. 8 months under normal use
*Digital models **Analog models


Function of Digital Model

Zero-setting, Preset, Data hold, Automatic power ON/OFF,
Data output, inch/mm conversion (inch/mm models)
Alarm: Low voltage, Counting value composition error

Optional Accessory

05CZA662: SPC cable with data switch (1m)
05CZA663: SPC cable with data switch (2m)
: Setting ring (See page 122.)

For **145-185, 145-186, 145-193, 145-194**

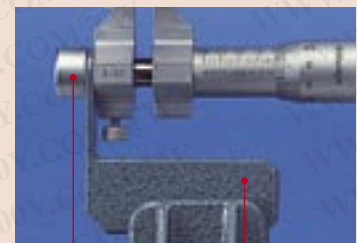

Cap (300401)

Holder (300400)

SPECIFICATIONS

Metric Digital model		
Range	Order No.	Accuracy
5 - 30mm	345-250	±5µm
25 - 50mm	345-251	±6µm

Inch/Metric Digital model		
Range	Order No.	Accuracy
.2" - 1.2"	345-350	±.00025"
1" - 2"	345-351	±.0003"

Metric		
Range	Order No.	Accuracy
5 - 30mm	145-185	±5µm
25 - 50mm	145-186	±6µm
50 - 75mm	145-187	±7µm
75 - 100mm	145-188	±8µm
100 - 125mm	145-189	±9µm
125 - 150mm	145-190	±9µm
150 - 175mm	145-191	±10µm
175 - 200mm	145-192	±10µm
200 - 225mm	145-217	±11µm
225 - 250mm	145-218	±11µm
250 - 275mm	145-219	±12µm
275 - 300mm	145-220	±12µm

Inch		
Range	Order No.	Accuracy
.2" - 1.2"	145-193	±.00025"
1" - 2"	145-194	±.0003"
2" - 3"	145-195	±.00035"
3" - 4"	145-196	±.0004"

勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-54151736
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

DIMENSION

