

mm inch

RoHS Directive compatibility information
<http://www.nais-e.com/>

FEATURES

• Silent

Noise has been reduced by approximately 20 dB, using our own silencing design.


• Less space required

Measuring only 17(L)×13(W)mm (.669(L)×.512(W) inches), this product ranks first among automotive quiet relays in terms of saving space.

• Sealed construction

• Next-generation standard terminal pitch employed

The terminal array used is identical to that used in JJM relays.



SPECIFICATIONS

Contact

Arrangement	1 Form C	
Contact material	Ag alloy (Cadmium free)	
Initial contact resistance (Initial) (By voltage drop 6 V DC 1A)	Typ. 7 mΩ (N.O.) Typ. 8 mΩ (N.C.)	
Contact voltage drop	Max. 0.2V (at 10 A)	
Rating	Nominal switching capacity	N.O.: 20 A 14 V DC N.C.: 10 A 14 V DC
	Max. carrying current	35 A for 2 minutes, 25 A for 1 hour (12 V, at 20°C 68°F) 30 A for 2 minutes, 20 A for 1 hour (12 V, at 85°C 185°F)
	Min. switching capacity ^{#1}	1 A 12 V DC
	Mechanical (at 120 cpm)	Min. 10 ⁷
Expected life (min. operations)	Electrical	Resistive load Min. 10 ⁵ *1 Motor load Min. 3×10 ⁵ *2

Coil

Nominal operating power	640 mW
-------------------------	--------

^{#1} This value can change due to the switching frequency, environmental conditions, and desired reliability level, therefore it is recommended to check this with the actual load.

Remarks

*1 At nominal switching capacity, operating frequency: 1s ON, 9s OFF

*2 N.O.: at 5 A (steady), 30 A (inrush)/N.C.: at 20 A (brake) 14 V DC, operating frequency: 1s ON, 2s OFF

*3 Measurement at same location as "Initial breakdown voltage" section

*4 Detection current: 10mA

*5 Excluding contact bounce time

*6 Half-wave pulse of sine wave: 11ms; detection: 10μs

*7 Half-wave pulse of sine wave: 6ms

*8 Detection time: 10μs

Characteristics

Max. operating speed (at nominal switching capacity)	6 cpm	
Initial insulation resistance ^{*3}	Min. 100 MΩ (at 500 V DC)	
Initial breakdown voltage ^{*4}	Between open contacts	500 Vrms for 1 min.
	Between contacts and coil	500 Vrms for 1 min.
Operate time ^{*5} (at nominal voltage)(at 20°C 68°F)	Max. 10 ms (initial)	
Release time ^{*5} (at nominal voltage)(at 20°C 68°F)	Max. 10 ms (initial)	
Shock resistance	Functional ^{*6}	Min. 100 m/s ² {10G}
	Destructive ^{*7}	Min. 1,000 m/s ² {100G}
Vibration resistance	Functional ^{*8}	10 Hz to 100 Hz, Min. 44.1 m/s ² {4.5G}
	Destructive ^{*9}	10 Hz to 500 Hz, Min. 44.1 m/s ² {4.5G}
Conditions for operation, transport and storage ^{*10} (Not freezing and condensing at low temperature)	Ambient temperature	-40°C to +85°C -40°F to +185°F
	Humidity	5% R.H. to 85% R.H.
Mass	Approx. 6.5g .23 oz	

*9 Time of vibration for each direction;

X, Y, direction: 2 hours
Z direction: 4 hours



*10 Refer to Conditions for operation, transport and storage mentioned in AMBIENT ENVIRONMENT.

Please inquire if you will be using the relay in a high temperature atmosphere (110°C 230°F).

TYPICAL APPLICATIONS

- Intermittent wiper
- Cruise control
- Power windows
- Auto door lock
- Car stereo
- Car air-conditioner
- Electrically powered seats
- Electrically powered sunroof, etc.

勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-54151736
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

ORDERING INFORMATION

Ex. CQ 1 - 12 V

Contact arrangement	Coil voltage(DC)
1 Form C	12 V

Standard packing: Carton(tube package) 40pcs. Case: 800pcs.


TYPES AND COIL DATA (at 20°C 68°F)

Part No.	Nominal voltage, V DC	Pick-up voltage, V DC (Initial)*	Drop-out voltage, V DC (Initial)	Coil resistance, Ω	Nominal operating current, mA	Nominal operating power, mW	Usable voltage range, V DC
CQ1-12V	12	Max. 7.2	Min. 1.0	225±10%	53.3±10%	640	10 to 16


* Other pick-up voltage types are also available. Please contact us for details.

DIMENSIONS

mm inch

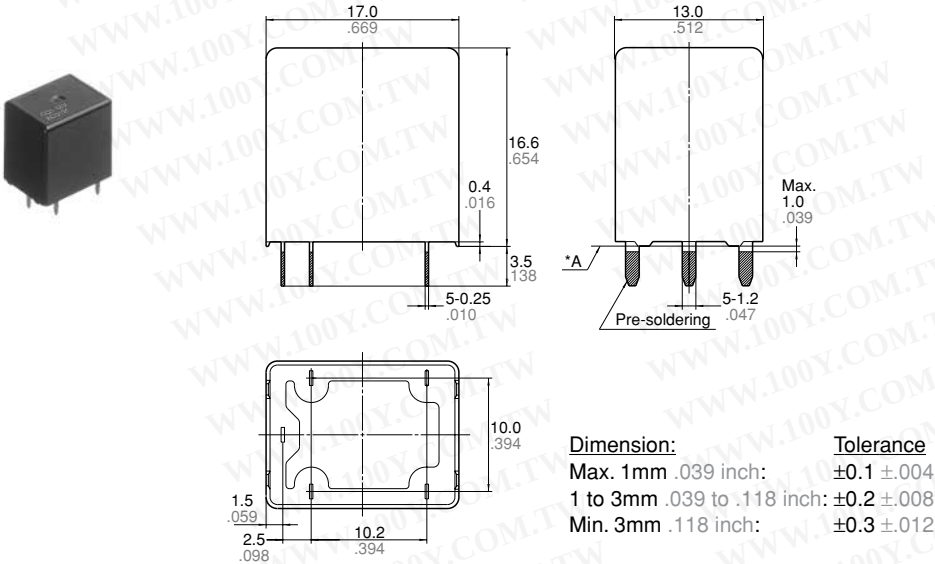


PC board pattern (Bottom view)



Tolerance: ±0.1 ±.004


Schematic (Bottom view)



* Dimensions (thickness and width) of terminal specified in this catalog is measured before pre-soldering. Intervals between terminals is measured at A surface level.

EXAMPLE OF CIRCUIT

Control circuit for intermittent wiper motor

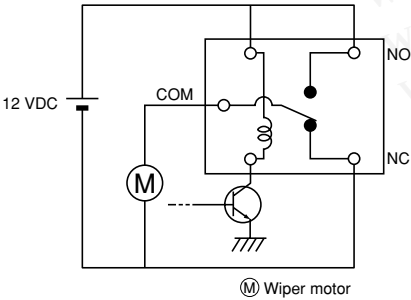


勝特力材料 886-3-5753170
 胜特力电子(上海) 86-21-54151736
 胜特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

REFERENCE DATA


1-(1). Coil temperature rise (at room temperature)

Sample: CQ1-12V, 5pcs
Contact carrying current: 10A, 15A, 20A
Ambient temperature: Room temperature

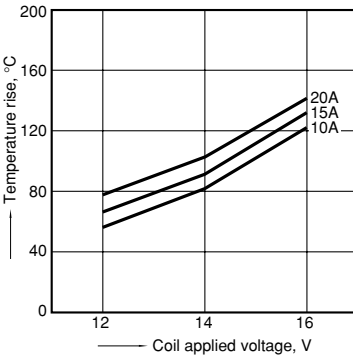


1-(2). Coil temperature rise (at 85°C 185°F)


Sample: CQ1-12V, 5pcs
Contact carrying current: 10A, 15A
Ambient temperature: 85°C 185°F

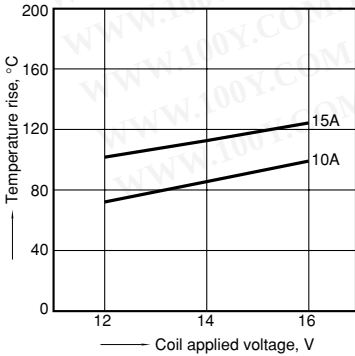


2. Max. switching capability (Resistive load, initial)

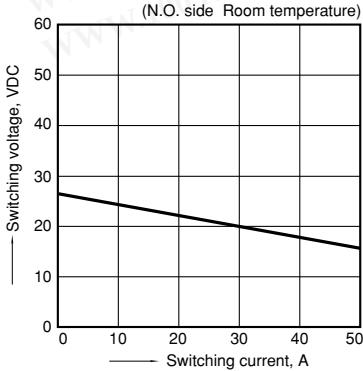

3. Ambient temperature and operating temperature range

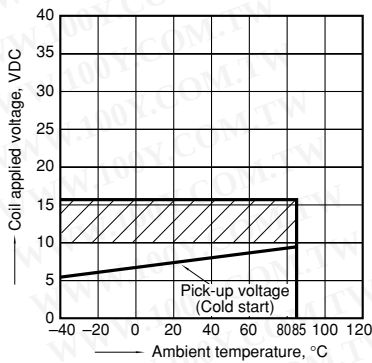


4. Ambient temperature characteristics

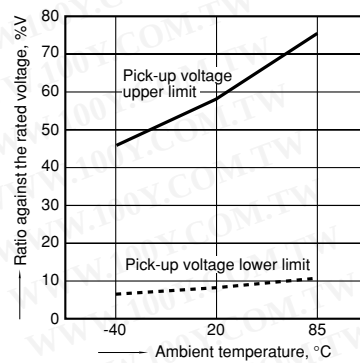


5. Distribution of pick-up and drop-out voltage

Sample: CQ1-12V, 100pcs

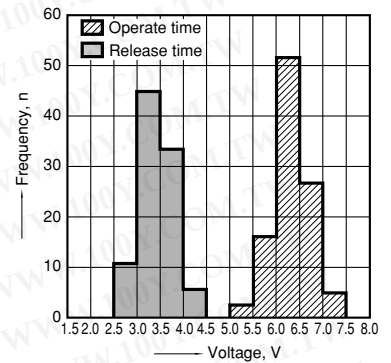

6. Distribution of operate time


Sample: CQ1-12V, 100pcs

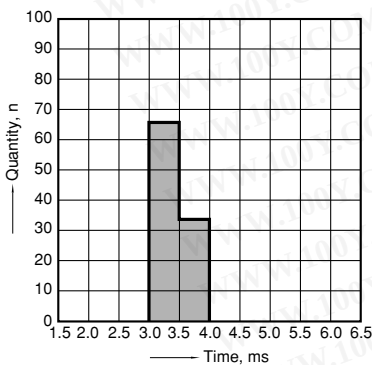

7. Distribution of release time

Sample: CQ1-12V, 100pcs

* With diode

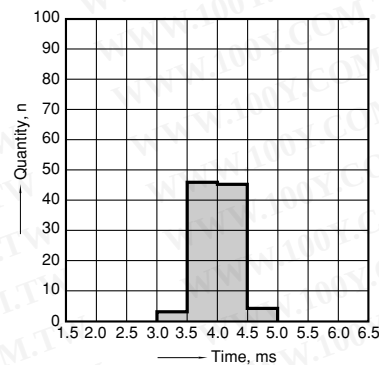

勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-54151736
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

8. Electrical life test (Motor free)

Sample: CQ1-12V, 3pcs

Load: Inrush current: 30A, Steady current: 5A,

Brake current: 17A,


wiper motor actual load (free condition)

Tested voltage: 14V DC

Switching frequency: (ON:OFF = 1s:2s)

Ambient temperature: Room temperature


Circuit




Load current waveform

Inrush current: 30A, Steady current: 5A,


Brake current: 17A

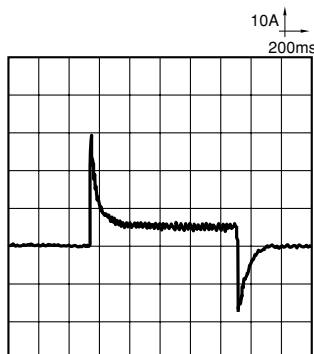


Change of pick-up and drop-out voltage

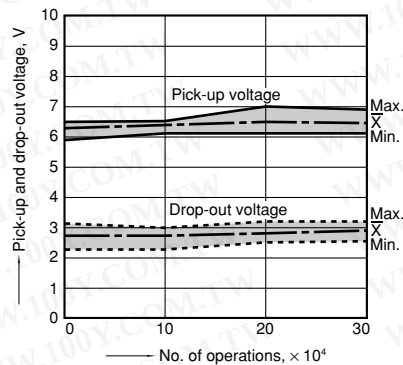


Change of contact resistance

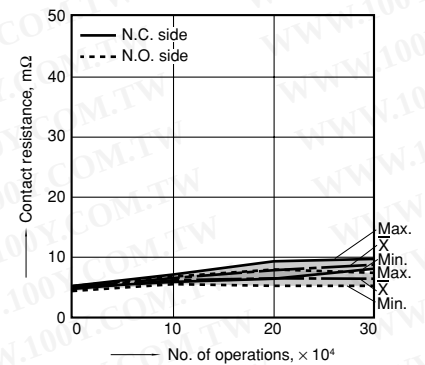


9-(1). Operation noise distribution
When operate

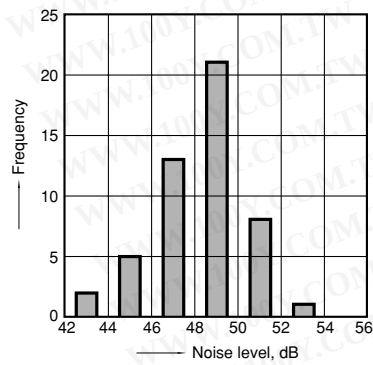

9-(2). Operation noise distribution
When release

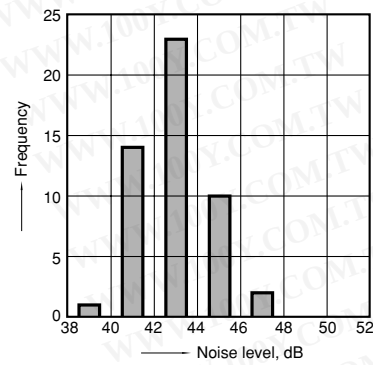

Measuring conditions
Sample: CQ1-12 V, 50 pcs.
Equipment setting: "A" weighted, Fast, Max. hold
Coil voltage: 12V DC
Coil connection device: Diode
Background noise: Approx. 20dB



For Cautions for Use, see Relay Technical Information.

勝特力材料 886-3-5753170
胜特力电子(上海) 86-21-54151736
胜特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)