






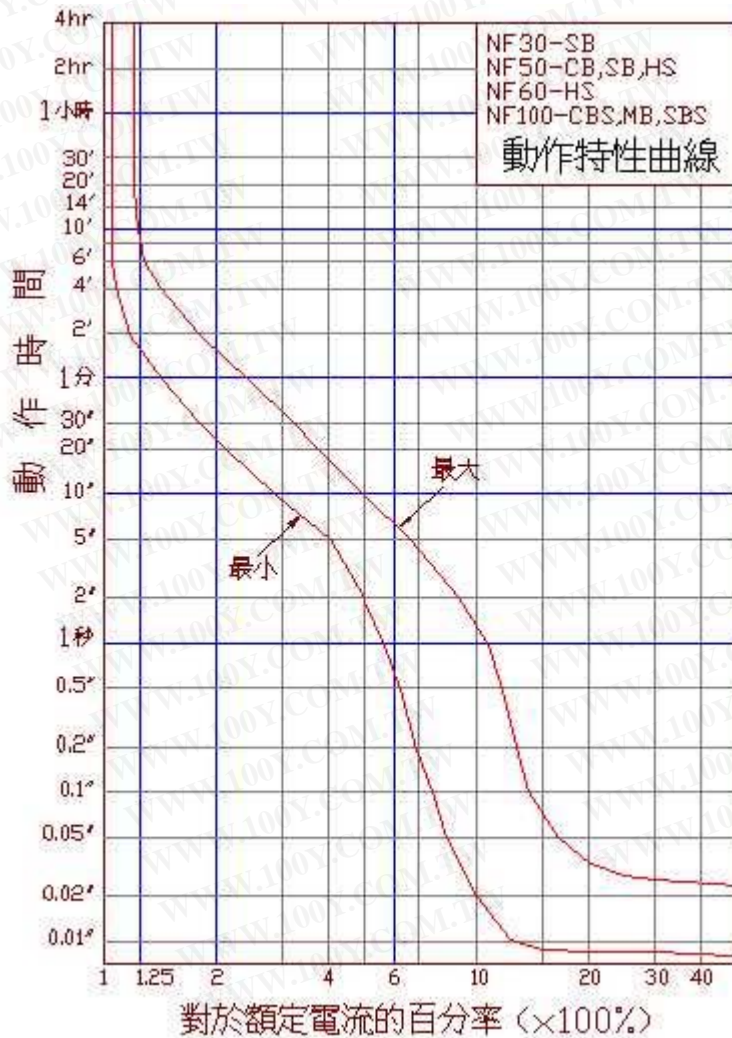


NF型 標準品-配電,配線用

框架容量(AF)		30		50				60		100		
型式		NF30-SB		NF50-SB		NF50-HS		NF60-HS		NF100-MB		
外觀												
外形尺寸圖(dwg檔)												
跳脫曲線圖(dwg檔)												
額定電流 In (A) (AT) (基準周圍溫度40°C)		3,5,10,15,20, 30		10,15,20,30, 40,50		10,15,20,30, 40,50		60		10,15,20,30, 50,60,75,100		
極數(P)		2 3		2 3		2 3		2 3		2 3		
最高額定使用電壓 Ui (V)	AC	690		690		690		690		690		
	DC	250		250		250		250		250		
外型 及 安裝 尺寸  (mm)	a	50	75	50	75	50	75	50	75	50	75	
	b	130										
	c	68										
	ca	86										
	bb	111										
	aa	0	25	0	25	0	25	0	25	0	25	
	製品重量(Kg)		0.45	0.65	0.45	0.65	0.45	0.65	0.45	0.65	0.45	0.65
額定 放 斷 容 量 (KA)	CNS C4085 JIS C8370 (非對稱 值/對稱值) AC	550V 600V	1.5		5		5		5		5	
		440V 480V	2.5		7.5		10		10		7.5	
		380V	2.5		7.5		18/15		18/15		10	
		220V 240V	5		10		30/25		30/25		18/15	
	IEC 947-2 EN 60947-2 lcu/lcs AC	500V	1.5/0.8		5/2.5		5/2.5		5/2.5		5/2.5	
		440V	2.5/1.3		5/2.5		10/5		10/5		7.5/3.8	
		415V	2.5/1.3		7.5/3.8		10/5		10/5		10/5	
		380V	2.5/1.3		7.5/3.8		15/7.5		15/7.5		10/5	
		240V	5/2.5		10/5		25/13		25/13		15/7.5	
	DC	250V	2.5	--	5	--	10	--	10	--	5	--
		125V	5	--	7.5	--	15	--	15	--	7.5	--
	接線方式		壓著端子									
壓線板螺絲												


勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-54151736
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

選購配件	警報開關(AL)	0	0	0	0	0	
	輔助開關(AX)	0	0	0	0	0	
	電壓跳脫裝置(SHT)	0	0	0	0	0	
	低電壓跳脫裝置(UVT)	--	--	--	--	--	
	附件引線端子台(LT)	--	--	--	--	--	
	外部操作把手	--	0	--	0	--	0
	端子隔離蓋	0	0	0	0	0	
過載跳脫方式	完全電磁式						
跳脫按鈕	有						




NF30-SB NF50-CB,SB,HS
 NF60-HS NF100-CBS,MB,SBS

外形及安裝尺寸

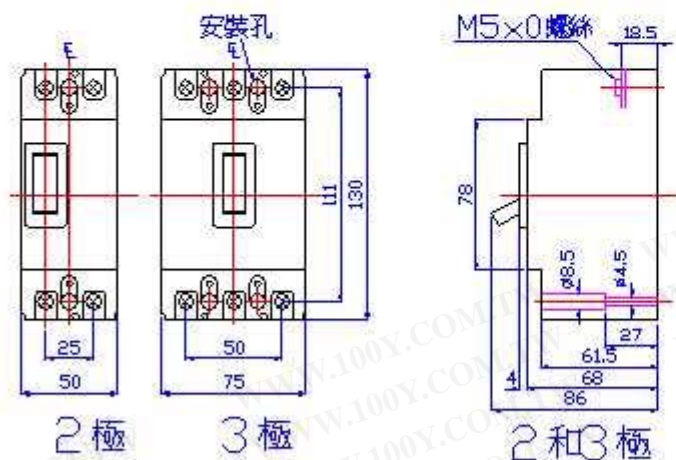

NF30-SB
 NF50-CB,SB,HS
 NF60-HS
 母線最大厚度=5
 NF100-CBS,MB,SBS
 母線最大厚度=6



鑽孔圖

