


勝特力材料 886-3-5753170
勝特力电子(上海) 86-21-54151736
勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

A. Material List

NO.	ITEM	DESCRIPTION
1	TERMINAL	SQNB5-3.7
2	COATING RESIN	BLACK EPOXY
3	LEAD WIRE	UL 1430#22 TC(白色線)

B. Electrical Characteristic

ITEM	VALUE
R25°C	100 Ω $\pm$ 5%
B25/50°C	3200K $\pm$ 5%

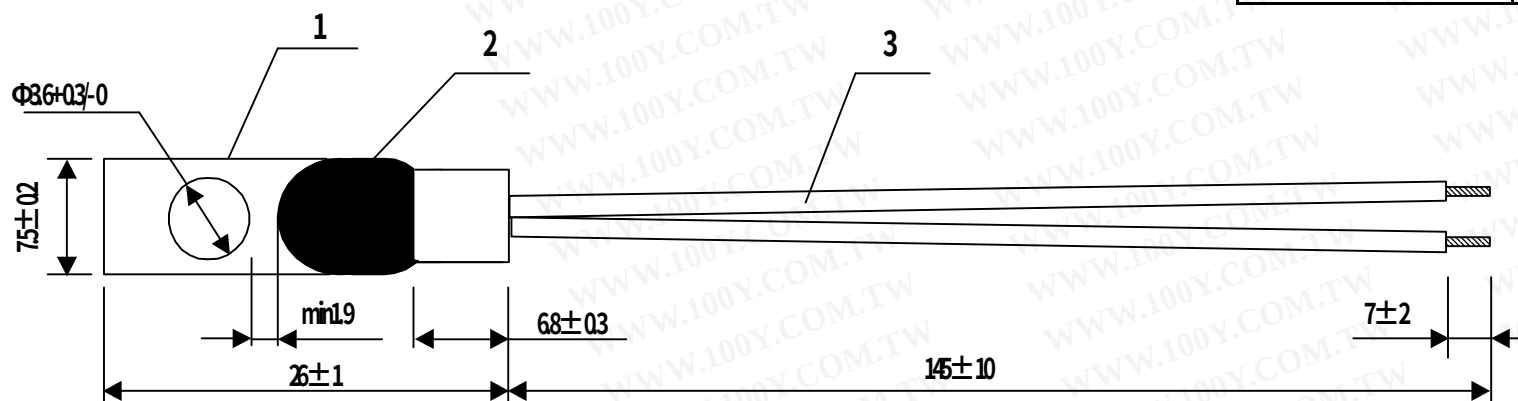

勝特力材料 886-3-5753170
勝特力电子(上海) 86-21-54151736
勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

THINKING P/N: NTSA0101JG001

NO	PART NAME	PART P/N	Q' TY	MANUFACTRURE OF MATERIAL	FLAMMABILITY SOLID BURNING CLASS	UL FILE NO
1	TERMINAL	SQNB5-3.7	1	LITENG	BRASS	
2	COATING RESIN	BLACK EPOXY		DAZHOU		
3	LEAD WIRE	UL 1430#22 TC 白色線	2	LONGWELL OR EQUIVALENT	VW-1	UL APPROVED
備 注						

Specification of NTC Thermistor for Sensor

PART NO. NTSA0101JG001

CUSTOMER P/N. _____

勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-54151736
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

2. Electrical characteristics

	Parameter	Symbol	Test Conditions	Min.	Nor.	Max.	Unit.
a.	Resistance At 25°C	R ₂₅	Ta=25°C±0.1°C I<0.5mA	0.095	0.1	0.105	KOHM
b.	Resistance At 50°C	R ₅₀	Ta=50°C±0.1°C I<0.5mA	-----	3.497	-----	KOHM
c.	R ₂₅ / R ₅₀	K	-----	-----	2.859	-----	-----
d.	B Constant	B	(8876 Log K)	3040	3200	3360	K
e.	Thermal Dissipation Constant	C	Ta=25°C±0.1°C	-----	20	-----	mW/°C
f.	Thermal Time Constant	-----	Ta=25°C±0.1°C	-----	19	-----	Sec
g.	Hi-Pot Test	-----	1000V AC 3 sec	-----	----	10	mA

3. Maximum Ratings

	Parameter	Specification	Unit
a.	Operation Temperature Range	- 10 --- 105	°C
b.	Max' Permissible Current	340	mA
c.	Max' Operating Current	170	mA

4. Mechanical Characteristics

4-1 Leads Terminal Tensile Strength

Conditions	Test Result	
Fasten body with a Load Applied to each lead 1 kg for 5 sec.	No break out	OK
	and damage	

5. Reliability Test

Item	Test Conditions	Variable
Temp. cycle test	-10 °C X 30min → +25 °C X 5 min +105 °C X 30min → +25 °C X 5 min } X 10cycles	Within ± 5 %
Humidity test	45 °C 95 % RH X 1000 HRS	Within ± 5 %
Life test	340 mAmp. X 1000 HRS	Within ± 5 %

