

# MC7800, MC7800A, NCV7805

## 1.0 A Positive Voltage Regulators

These voltage regulators are monolithic integrated circuits designed as fixed-voltage regulators for a wide variety of applications including local, on-card regulation. These regulators employ internal current limiting, thermal shutdown, and safe-area compensation. With adequate heatsinking they can deliver output currents in excess of 1.0 A. Although designed primarily as a fixed voltage regulator, these devices can be used with external components to obtain adjustable voltages and currents.

- Output Current in Excess of 1.0 A
- No External Components Required
- Internal Thermal Overload Protection
- Internal Short Circuit Current Limiting
- Output Transistor Safe-Area Compensation
- Output Voltage Offered in 2% and 4% Tolerance
- Available in Surface Mount D<sup>2</sup>PAK-3, DPAK-3 and Standard 3-Lead Transistor Packages
- NCV Prefix for Automotive and Other Applications Requiring Site and Control Changes
- Pb-Free Packages are Available

### MAXIMUM RATINGS ( $T_A = 25^\circ\text{C}$ , unless otherwise noted)

| Rating                                     | Symbol          | Value              |      |              | Unit               |
|--------------------------------------------|-----------------|--------------------|------|--------------|--------------------|
|                                            |                 | 369C               | 221A | 936          |                    |
| Input Voltage (5.0 – 18 V)<br>(24 V)       | $V_I$           | 35<br>40           |      |              | Vdc                |
| Power Dissipation                          | $P_D$           | Internally Limited |      |              | W                  |
| Thermal Resistance,<br>Junction-to-Ambient | $R_{\theta JA}$ | 92                 | 65   | Figure<br>14 | $^\circ\text{C/W}$ |
| Thermal Resistance,<br>Junction-to-Case    | $R_{\theta JC}$ | 5.0                | 5.0  | 5.0          | $^\circ\text{C/W}$ |
| Storage Junction Temperature<br>Range      | $T_{stg}$       | -65 to +150        |      |              | $^\circ\text{C}$   |
| Operating Junction Temperature             | $T_J$           | +150               |      |              | $^\circ\text{C}$   |

Maximum ratings are those values beyond which device damage can occur. Maximum ratings applied to the device are individual stress limit values (not normal operating conditions) and are not valid simultaneously. If these limits are exceeded, device functional operation is not implied, damage may occur and reliability may be affected.


\*This device series contains ESD protection and exceeds the following tests:  
Human Body Model 2000 V per MIL-STD-883, Method 3015.  
Machine Model Method 200 V.

勝特力材料 886-3-5753170  
勝特力电子(上海) 86-21-54151736  
勝特力电子(深圳) 86-755-83298787  
[Http://www.100y.com.tw](http://www.100y.com.tw)




ON Semiconductor®

<http://onsemi.com>



TO-220-3  
T SUFFIX  
CASE 221A


Heatsink surface  
connected to Pin 2.



Pin 1. Input  
2. Ground  
3. Output


D<sup>2</sup>PAK-3  
D2T SUFFIX  
CASE 936

Heatsink surface (shown as terminal 4 in  
case outline drawing) is connected to Pin 2.



DPAK-3  
DT SUFFIX  
CASE 369C

### STANDARD APPLICATION

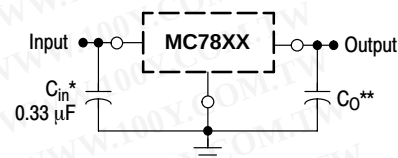

A common ground is required between the input and the output voltages. The input voltage must remain typically 2.0 V above the output voltage even during the low point on the input ripple voltage.

XX, These two digits of the type number indicate nominal voltage.

\*  $C_{in}$  is required if regulator is located an appreciable distance from power supply filter.

\*\*  $C_O$  is not needed for stability; however, it does improve transient response. Values of less than 0.1  $\mu\text{F}$  could cause instability.


### ORDERING INFORMATION

See detailed ordering and shipping information in the package dimensions section on page 22 of this data sheet.

### DEVICE MARKING INFORMATION

See general marking information in the device marking section on page 28 of this data sheet.

# MC7800, MC7800A, NCV7805

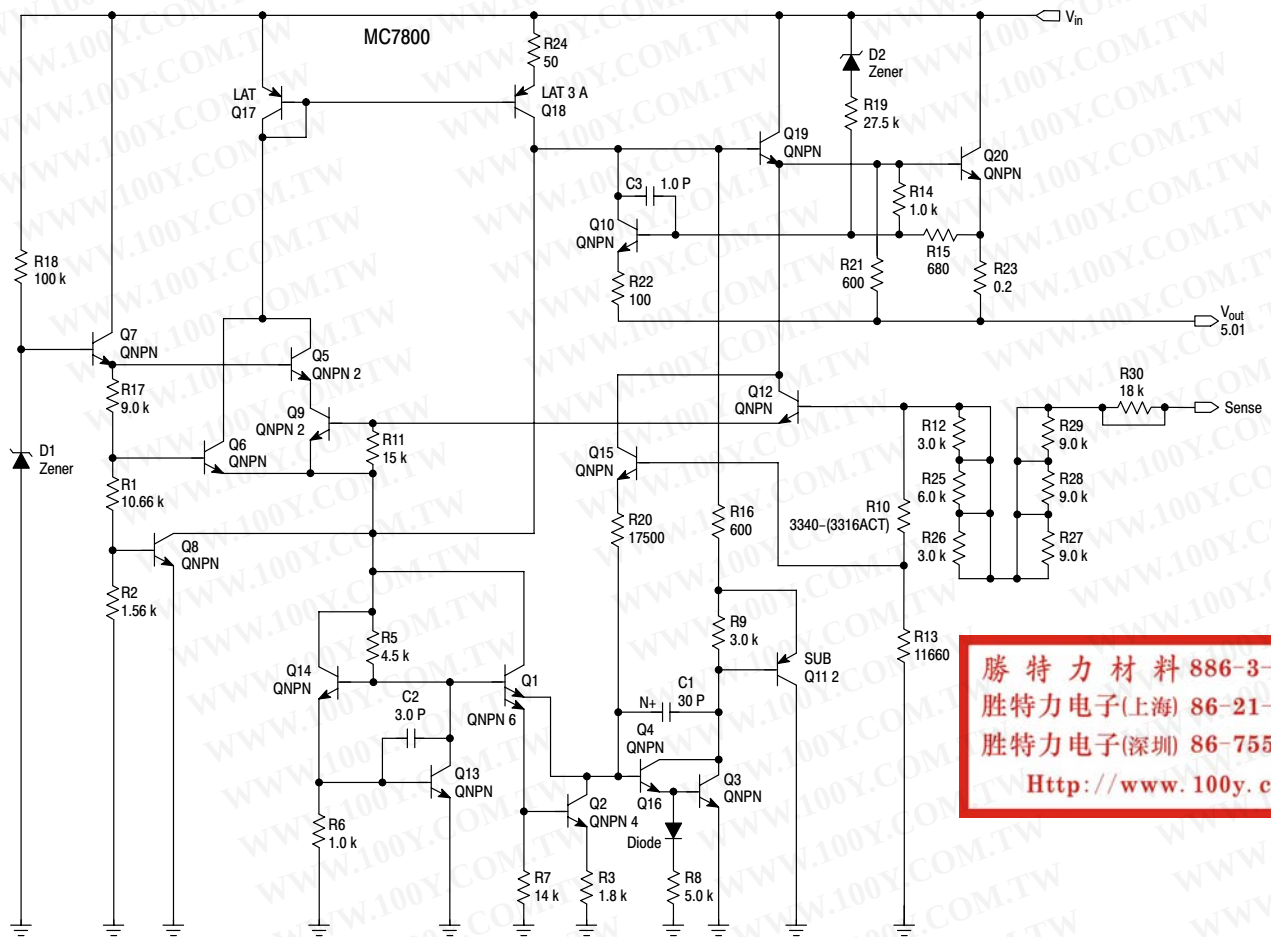

勝特力材料 886-3-5753170  
 勝特力电子(上海) 86-21-54151736  
 勝特力电子(深圳) 86-755-83298787  
[Http://www.100y.com.tw](http://www.100y.com.tw)

This device contains 22 active transistors.

Figure 1. Representative Schematic Diagram

# MC7800, MC7800A, NCV7805

**ELECTRICAL CHARACTERISTICS** ( $V_{in} = 10\text{ V}$ ,  $I_O = 500\text{ mA}$ ,  $T_J = T_{low}$  to  $T_{high}$  (Note 1), unless otherwise noted)

| Characteristic                                                                                                                                                                               | Symbol              | MC7805B, NCV7805 |             |           | MC7805C   |             |            | Unit                       |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------|------------------|-------------|-----------|-----------|-------------|------------|----------------------------|
|                                                                                                                                                                                              |                     | Min              | Typ         | Max       | Min       | Typ         | Max        |                            |
| Output Voltage ( $T_J = 25^\circ\text{C}$ )                                                                                                                                                  | $V_O$               | 4.8              | 5.0         | 5.2       | 4.8       | 5.0         | 5.2        | Vdc                        |
| Output Voltage ( $5.0\text{ mA} \leq I_O \leq 1.0\text{ A}$ , $P_D \leq 15\text{ W}$ )<br>$7.0\text{ Vdc} \leq V_{in} \leq 20\text{ Vdc}$<br>$8.0\text{ Vdc} \leq V_{in} \leq 12\text{ Vdc}$ | $V_O$               | —<br>4.75        | —<br>5.0    | —<br>5.25 | 4.75<br>— | 5.0<br>—    | 5.25<br>—  | Vdc                        |
| Line Regulation (Note 4)<br>$7.5\text{ Vdc} \leq V_{in} \leq 20\text{ Vdc}$ , $1.0\text{ A}$<br>$8.0\text{ Vdc} \leq V_{in} \leq 12\text{ Vdc}$                                              | $\text{Reg}_{line}$ | —<br>—           | 5.0<br>1.3  | 100<br>50 | —<br>—    | 0.5<br>0.8  | 20<br>10   | mV                         |
| Load Regulation (Note 4)<br>$5.0\text{ mA} \leq I_O \leq 1.0\text{ A}$<br>$5.0\text{ mA} \leq I_O \leq 1.5\text{ A}$ ( $T_A = 25^\circ\text{C}$ )                                            | $\text{Reg}_{load}$ | —<br>—           | 1.3<br>0.15 | 100<br>50 | —<br>—    | 1.3<br>1.3  | 25<br>25   | mV                         |
| Quiescent Current                                                                                                                                                                            | $I_B$               | —                | 3.2         | 8.0       | —         | 3.2         | 6.5        | mA                         |
| Quiescent Current Change<br>$7.0\text{ Vdc} \leq V_{in} \leq 25\text{ Vdc}$<br>$5.0\text{ mA} \leq I_O \leq 1.0\text{ A}$ ( $T_A = 25^\circ\text{C}$ )                                       | $\Delta I_B$        | —<br>—           | —<br>—      | —<br>0.5  | —<br>—    | 0.3<br>0.08 | 1.0<br>0.8 | mA                         |
| Ripple Rejection<br>$8.0\text{ Vdc} \leq V_{in} \leq 18\text{ Vdc}$ , $f = 120\text{ Hz}$                                                                                                    | RR                  | —                | 68          | —         | 62        | 83          | —          | dB                         |
| Dropout Voltage ( $I_O = 1.0\text{ A}$ , $T_J = 25^\circ\text{C}$ )                                                                                                                          | $V_I - V_O$         | —                | 2.0         | —         | —         | 2.0         | —          | Vdc                        |
| Output Noise Voltage ( $T_A = 25^\circ\text{C}$ )<br>$10\text{ Hz} \leq f \leq 100\text{ kHz}$                                                                                               | $V_n$               | —                | 10          | —         | —         | 10          | —          | $\mu\text{V}/V_O$          |
| Output Resistance $f = 1.0\text{ kHz}$                                                                                                                                                       | $r_O$               | —                | 0.9         | —         | —         | 0.9         | —          | $\text{m}\Omega$           |
| Short Circuit Current Limit ( $T_A = 25^\circ\text{C}$ )<br>$V_{in} = 35\text{ Vdc}$                                                                                                         | $I_{SC}$            | —                | 0.2         | —         | —         | 0.6         | —          | A                          |
| Peak Output Current ( $T_J = 25^\circ\text{C}$ )                                                                                                                                             | $I_{max}$           | —                | 2.2         | —         | —         | 2.2         | —          | A                          |
| Average Temperature Coefficient of Output Voltage                                                                                                                                            | $\text{TCV}_O$      | —                | -0.3        | —         | —         | -0.3        | —          | $\text{mV}/^\circ\text{C}$ |

1.  $T_{low} = 0^\circ\text{C}$  for MC78XXAC, C,  $T_{high} = +125^\circ\text{C}$  for MC78XXAC, NCV7805  
=  $-40^\circ\text{C}$  for MC78XXB, MC78XXAB, NCV7805

2. Load and line regulation are specified at constant junction temperature. Changes in  $V_O$  due to heating effects must be taken into account separately. Pulse testing with low duty cycle is used.

勝特力材料 886-3-5753170  
勝特力电子(上海) 86-21-54151736  
勝特力电子(深圳) 86-755-83298787  
[Http://www.100y.com.tw](http://www.100y.com.tw)

# MC7800, MC7800A, NCV7805

**ELECTRICAL CHARACTERISTICS** ( $V_{in} = 10\text{ V}$ ,  $I_O = 1.0\text{ A}$ ,  $T_J = T_{low}$  to  $T_{high}$  (Note 3), unless otherwise noted)

| Characteristic                                                                                                                                                                                                                                                                                                                                                                          | Symbol              | MC7805AB/MC7805AC |                          |                       | Unit                       |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------|-------------------|--------------------------|-----------------------|----------------------------|
|                                                                                                                                                                                                                                                                                                                                                                                         |                     | Min               | Typ                      | Max                   |                            |
| Output Voltage ( $T_J = 25^\circ\text{C}$ )                                                                                                                                                                                                                                                                                                                                             | $V_O$               | 4.9               | 5.0                      | 5.1                   | Vdc                        |
| Output Voltage ( $5.0\text{ mA} \leq I_O \leq 1.0\text{ A}$ , $P_D \leq 15\text{ W}$ )<br>$7.5\text{ Vdc} \leq V_{in} \leq 20\text{ Vdc}$                                                                                                                                                                                                                                               | $V_O$               | 4.8               | 5.0                      | 5.2                   | Vdc                        |
| Line Regulation (Note 4)<br>$7.5\text{ Vdc} \leq V_{in} \leq 25\text{ Vdc}$ , $I_O = 500\text{ mA}$<br>$8.0\text{ Vdc} \leq V_{in} \leq 12\text{ Vdc}$ , $I_O = 1.0\text{ A}$<br>$8.0\text{ Vdc} \leq V_{in} \leq 12\text{ Vdc}$ , $I_O = 1.0\text{ A}$ , $T_J = 25^\circ\text{C}$<br>$7.3\text{ Vdc} \leq V_{in} \leq 20\text{ Vdc}$ , $I_O = 1.0\text{ A}$ , $T_J = 25^\circ\text{C}$ | $\text{Reg}_{line}$ | –                 | 0.5<br>0.8<br>1.3<br>4.5 | 10<br>12<br>4.0<br>10 | mV                         |
| Load Regulation (Note 4)<br>$5.0\text{ mA} \leq I_O \leq 1.5\text{ A}$ , $T_J = 25^\circ\text{C}$<br>$5.0\text{ mA} \leq I_O \leq 1.0\text{ A}$<br>$250\text{ mA} \leq I_O \leq 750\text{ mA}$                                                                                                                                                                                          | $\text{Reg}_{load}$ | –                 | 1.3<br>0.8<br>0.53       | 25<br>25<br>15        | mV                         |
| Quiescent Current                                                                                                                                                                                                                                                                                                                                                                       | $I_B$               | –                 | 3.2                      | 6.0                   | mA                         |
| Quiescent Current Change<br>$8.0\text{ Vdc} \leq V_{in} \leq 25\text{ Vdc}$ , $I_O = 500\text{ mA}$<br>$7.5\text{ Vdc} \leq V_{in} \leq 20\text{ Vdc}$ , $T_J = 25^\circ\text{C}$<br>$5.0\text{ mA} \leq I_O \leq 1.0\text{ A}$                                                                                                                                                         | $\Delta I_B$        | –                 | 0.3<br>–<br>0.08         | 0.8<br>0.8<br>0.5     | mA                         |
| Ripple Rejection<br>$8.0\text{ Vdc} \leq V_{in} \leq 18\text{ Vdc}$ , $f = 120\text{ Hz}$ , $I_O = 500\text{ mA}$                                                                                                                                                                                                                                                                       | RR                  | 68                | 83                       | –                     | dB                         |
| Dropout Voltage ( $I_O = 1.0\text{ A}$ , $T_J = 25^\circ\text{C}$ )                                                                                                                                                                                                                                                                                                                     | $V_I - V_O$         | –                 | 2.0                      | –                     | Vdc                        |
| Output Noise Voltage ( $T_A = 25^\circ\text{C}$ )<br>$10\text{ Hz} \leq f \leq 100\text{ kHz}$                                                                                                                                                                                                                                                                                          | $V_n$               | –                 | 10                       | –                     | $\mu\text{V}/V_O$          |
| Output Resistance ( $f = 1.0\text{ kHz}$ )                                                                                                                                                                                                                                                                                                                                              | $r_O$               | –                 | 0.9                      | –                     | $\text{m}\Omega$           |
| Short Circuit Current Limit ( $T_A = 25^\circ\text{C}$ )<br>$V_{in} = 35\text{ Vdc}$                                                                                                                                                                                                                                                                                                    | $I_{SC}$            | –                 | 0.2                      | –                     | A                          |
| Peak Output Current ( $T_J = 25^\circ\text{C}$ )                                                                                                                                                                                                                                                                                                                                        | $I_{max}$           | –                 | 2.2                      | –                     | A                          |
| Average Temperature Coefficient of Output Voltage                                                                                                                                                                                                                                                                                                                                       | $\text{TCV}_O$      | –                 | –0.3                     | –                     | $\text{mV}/^\circ\text{C}$ |

3.  $T_{low} = 0^\circ\text{C}$  for MC78XXAC, C  $T_{high} = +125^\circ\text{C}$  for MC78XXAC, C, NCV7805  
=  $-40^\circ\text{C}$  for MC78XXB, MC78XXAB, NCV7805

4. Load and line regulation are specified at constant junction temperature. Changes in  $V_O$  due to heating effects must be taken into account separately. Pulse testing with low duty cycle is used.

勝特力材料 886-3-5753170  
勝特力电子(上海) 86-21-54151736  
勝特力电子(深圳) 86-755-83298787  
[Http://www.100y.com.tw](http://www.100y.com.tw)

# MC7800, MC7800A, NCV7805

**ELECTRICAL CHARACTERISTICS** ( $V_{in} = 11\text{ V}$ ,  $I_O = 500\text{ mA}$ ,  $T_J = T_{low}$  to  $T_{high}$  (Note 5), unless otherwise noted)

| Characteristic                                                                         | Symbol              | MC7806B |      |      | MC7806C |      |      | Unit                 |
|----------------------------------------------------------------------------------------|---------------------|---------|------|------|---------|------|------|----------------------|
|                                                                                        |                     | Min     | Typ  | Max  | Min     | Typ  | Max  |                      |
| Output Voltage ( $T_J = 25^\circ\text{C}$ )                                            | $V_O$               | 5.75    | 6.0  | 6.25 | 5.75    | 6.0  | 6.25 | Vdc                  |
| Output Voltage ( $5.0\text{ mA} \leq I_O \leq 1.0\text{ A}$ , $P_D \leq 15\text{ W}$ ) | $V_O$               |         |      |      |         |      |      | Vdc                  |
| 8.0 Vdc $\leq V_{in} \leq 21\text{ Vdc}$                                               |                     | –       | –    | –    | 5.7     | 6.0  | 6.3  |                      |
| 9.0 Vdc $\leq V_{in} \leq 21\text{ Vdc}$                                               |                     | 5.7     | 6.0  | 6.3  | –       | –    | –    |                      |
| Line Regulation, $T_J = 25^\circ\text{C}$ (Note 6)                                     | $\text{Reg}_{line}$ |         |      |      |         |      |      | mV                   |
| 8.0 Vdc $\leq V_{in} \leq 25\text{ Vdc}$                                               |                     | –       | 5.5  | 120  | –       | 0.5  | 24   |                      |
| 9.0 Vdc $\leq V_{in} \leq 13\text{ Vdc}$                                               |                     | –       | 1.4  | 60   | –       | 0.8  | 12   |                      |
| Load Regulation, $T_J = 25^\circ\text{C}$ (Note 6)                                     | $\text{Reg}_{load}$ | –       | 1.3  | 120  | –       | 1.3  | 30   | mV                   |
| 5.0 mA $\leq I_O \leq 1.5\text{ A}$                                                    |                     |         |      |      |         |      |      |                      |
| Quiescent Current ( $T_J = 25^\circ\text{C}$ )                                         | $I_B$               | –       | 3.3  | 8.0  | –       | 3.3  | 8.0  | mA                   |
| Quiescent Current Change                                                               | $\Delta I_B$        |         |      |      |         |      |      | mA                   |
| 8.0 Vdc $\leq V_{in} \leq 25\text{ Vdc}$                                               |                     | –       | –    | –    | –       | 0.3  | 1.3  |                      |
| 5.0 mA $\leq I_O \leq 1.0\text{ A}$                                                    |                     | –       | –    | 0.5  | –       | 0.08 | 0.5  |                      |
| Ripple Rejection                                                                       | RR                  | –       | 65   | –    | 58      | 65   | –    | dB                   |
| 9.0 Vdc $\leq V_{in} \leq 19\text{ Vdc}$ , $f = 120\text{ Hz}$                         |                     |         |      |      |         |      |      |                      |
| Dropout Voltage ( $I_O = 1.0\text{ A}$ , $T_J = 25^\circ\text{C}$ )                    | $V_I - V_O$         | –       | 2.0  | –    | –       | 2.0  | –    | Vdc                  |
| Output Noise Voltage ( $T_A = 25^\circ\text{C}$ )                                      | $V_n$               | –       | 10   | –    | –       | 10   | –    | $\mu\text{V}/V_O$    |
| 10 Hz $\leq f \leq 100\text{ kHz}$                                                     |                     |         |      |      |         |      |      |                      |
| Output Resistance $f = 1.0\text{ kHz}$                                                 | $r_O$               | –       | 0.9  | –    | –       | 0.9  | –    | m $\Omega$           |
| Short Circuit Current Limit ( $T_A = 25^\circ\text{C}$ )                               | $I_{SC}$            | –       | 0.2  | –    | –       | 0.2  | –    | A                    |
| $V_{in} = 35\text{ Vdc}$                                                               |                     |         |      |      |         |      |      |                      |
| Peak Output Current ( $T_J = 25^\circ\text{C}$ )                                       | $I_{max}$           | –       | 2.2  | –    | –       | 2.2  | –    | A                    |
| Average Temperature Coefficient of Output Voltage                                      | $\text{TCV}_O$      | –       | –0.3 | –    | –       | –0.3 | –    | mV/ $^\circ\text{C}$ |

5.  $T_{low} = 0^\circ\text{C}$  for MC78XXAC, C  $T_{high} = +125^\circ\text{C}$  for MC78XXAC, NCV7805  
 $= -40^\circ\text{C}$  for MC78XXB, MC78XXAB, NCV7805

6. Load and line regulation are specified at constant junction temperature. Changes in  $V_O$  due to heating effects must be taken into account separately. Pulse testing with low duty cycle is used.

勝特力材料 886-3-5753170  
 勝特力电子(上海) 86-21-54151736  
 勝特力电子(深圳) 86-755-83298787  
[Http://www.100y.com.tw](http://www.100y.com.tw)

# MC7800, MC7800A, NCV7805

**ELECTRICAL CHARACTERISTICS** ( $V_{in} = 11\text{ V}$ ,  $I_O = 1.0\text{ A}$ ,  $T_J = T_{low}$  to  $T_{high}$  (Note 7), unless otherwise noted)

| Characteristic                                                                                                                                                                                                                                         | Symbol              | MC7806AC    |                   |                   | Unit                       |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------|-------------|-------------------|-------------------|----------------------------|
|                                                                                                                                                                                                                                                        |                     | Min         | Typ               | Max               |                            |
| Output Voltage ( $T_J = 25^\circ\text{C}$ )                                                                                                                                                                                                            | $V_O$               | 5.88        | 6.0               | 6.12              | Vdc                        |
| Output Voltage ( $5.0\text{ mA} \leq I_O \leq 1.0\text{ A}$ , $P_D \leq 15\text{ W}$ )<br>$8.6\text{ Vdc} \leq V_{in} \leq 21\text{ Vdc}$                                                                                                              | $V_O$               | 5.76        | 6.0               | 6.24              | Vdc                        |
| Line Regulation (Note 8)<br>$8.6\text{ Vdc} \leq V_{in} \leq 25\text{ Vdc}$ , $I_O = 500\text{ mA}$<br>$9.0\text{ Vdc} \leq V_{in} \leq 13\text{ Vdc}$ , $I_O = 1.0\text{ A}$                                                                          | $\text{Reg}_{line}$ | –<br>–      | 5.0<br>1.4        | 12<br>15          | mV                         |
| Load Regulation (Note 8)<br>$5.0\text{ mA} \leq I_O \leq 1.5\text{ A}$ , $T_J = 25^\circ\text{C}$<br>$5.0\text{ mA} \leq I_O \leq 1.0\text{ A}$<br>$250\text{ mA} \leq I_O \leq 750\text{ mA}$                                                         | $\text{Reg}_{load}$ | –<br>–<br>– | 1.3<br>0.9<br>0.2 | 25<br>25<br>15    | mV                         |
| Quiescent Current                                                                                                                                                                                                                                      | $I_B$               | –           | 3.3               | 6.0               | mA                         |
| Quiescent Current Change<br>$9.0\text{ Vdc} \leq V_{in} \leq 25\text{ Vdc}$ , $I_O = 500\text{ mA}$<br>$9.0\text{ Vdc} \leq V_{in} \leq 21\text{ Vdc}$ , $I_O = 1.0\text{ A}$ , $T_J = 25^\circ\text{C}$<br>$5.0\text{ mA} \leq I_O \leq 1.0\text{ A}$ | $\Delta I_B$        | –<br>–<br>– | –<br>–<br>–       | 0.8<br>0.8<br>0.5 | mA                         |
| Ripple Rejection<br>$9.0\text{ Vdc} \leq V_{in} \leq 19\text{ Vdc}$ , $f = 120\text{ Hz}$ , $I_O = 500\text{ mA}$                                                                                                                                      | RR                  | 58          | 65                | –                 | dB                         |
| Dropout Voltage ( $I_O = 1.0\text{ A}$ , $T_J = 25^\circ\text{C}$ )                                                                                                                                                                                    | $V_I - V_O$         | –           | 2.0               | –                 | Vdc                        |
| Output Noise Voltage ( $T_A = 25^\circ\text{C}$ )<br>$10\text{ Hz} \leq f \leq 100\text{ kHz}$                                                                                                                                                         | $V_n$               | –           | 10                | –                 | $\mu\text{V}/V_O$          |
| Output Resistance ( $f = 1.0\text{ kHz}$ )                                                                                                                                                                                                             | $r_O$               | –           | 0.9               | –                 | $\text{m}\Omega$           |
| Short Circuit Current Limit ( $T_A = 25^\circ\text{C}$ )<br>$V_{in} = 35\text{ Vdc}$                                                                                                                                                                   | $I_{sc}$            | –           | 0.2               | –                 | A                          |
| Peak Output Current ( $T_J = 25^\circ\text{C}$ )                                                                                                                                                                                                       | $I_{max}$           | –           | 2.2               | –                 | A                          |
| Average Temperature Coefficient of Output Voltage                                                                                                                                                                                                      | $\text{TCV}_O$      | –           | –0.3              | –                 | $\text{mV}/^\circ\text{C}$ |

7.  $T_{low} = 0^\circ\text{C}$  for MC78XXAC, C  $T_{high} = +125^\circ\text{C}$  for MC78XXAC, C, NCV7805  
=  $-40^\circ\text{C}$  for MC78XXB, MC78XXAB, NCV7805

8. Load and line regulation are specified at constant junction temperature. Changes in  $V_O$  due to heating effects must be taken into account separately. Pulse testing with low duty cycle is used.

勝特力材料 886-3-5753170  
勝特力电子(上海) 86-21-54151736  
勝特力电子(深圳) 86-755-83298787  
[Http://www.100y.com.tw](http://www.100y.com.tw)

# MC7800, MC7800A, NCV7805

**ELECTRICAL CHARACTERISTICS** ( $V_{in} = 14\text{ V}$ ,  $I_O = 500\text{ mA}$ ,  $T_J = T_{low}$  to  $T_{high}$  (Note 9), unless otherwise noted)

| Characteristic                                                                         | Symbol              | MC7808B |      |     | MC7808C |      |     | Unit                       |
|----------------------------------------------------------------------------------------|---------------------|---------|------|-----|---------|------|-----|----------------------------|
|                                                                                        |                     | Min     | Typ  | Max | Min     | Typ  | Max |                            |
| Output Voltage ( $T_J = 25^\circ\text{C}$ )                                            | $V_O$               | 7.7     | 8.0  | 8.3 | 7.7     | 8.0  | 8.3 | Vdc                        |
| Output Voltage ( $5.0\text{ mA} \leq I_O \leq 1.0\text{ A}$ , $P_D \leq 15\text{ W}$ ) | $V_O$               |         |      |     |         |      |     | Vdc                        |
| 10.5 Vdc $\leq V_{in} \leq 23\text{ Vdc}$                                              |                     | –       | –    | –   | 7.6     | 8.0  | 8.4 |                            |
| 11.5 Vdc $\leq V_{in} \leq 23\text{ Vdc}$                                              |                     | 7.6     | 8.0  | 8.4 | –       | –    | –   |                            |
| Line Regulation, $T_J = 25^\circ\text{C}$ , (Note 10)                                  | $\text{Reg}_{line}$ |         |      |     |         |      |     | mV                         |
| 10.5 Vdc $\leq V_{in} \leq 25\text{ Vdc}$                                              |                     | –       | 6.0  | 160 | –       | 6.0  | 32  |                            |
| 11 Vdc $\leq V_{in} \leq 17\text{ Vdc}$                                                |                     | –       | 1.7  | 80  | –       | 1.7  | 16  |                            |
| Load Regulation, $T_J = 25^\circ\text{C}$ (Note 10)                                    | $\text{Reg}_{load}$ | –       | 1.4  | 160 | –       | 1.4  | 35  | mV                         |
| 5.0 mA $\leq I_O \leq 1.5\text{ A}$                                                    |                     |         |      |     |         |      |     |                            |
| Quiescent Current                                                                      | $I_B$               | –       | 3.3  | 8.0 | –       | 3.3  | 8.0 | mA                         |
| Quiescent Current Change                                                               | $\Delta I_B$        |         |      |     |         |      |     | mA                         |
| 10.5 Vdc $\leq V_{in} \leq 25\text{ Vdc}$                                              |                     | –       | –    | –   | –       | –    | 1.0 |                            |
| 5.0 mA $\leq I_O \leq 1.0\text{ A}$                                                    |                     | –       | –    | 0.5 | –       | –    | 0.5 |                            |
| Ripple Rejection                                                                       | $RR$                | –       | 62   | –   | 56      | 62   | –   | dB                         |
| 11.5 Vdc $\leq V_{in} \leq 18\text{ Vdc}$ , $f = 120\text{ Hz}$                        |                     |         |      |     |         |      |     |                            |
| Dropout Voltage ( $I_O = 1.0\text{ A}$ , $T_J = 25^\circ\text{C}$ )                    | $V_I - V_O$         | –       | 2.0  | –   | –       | 2.0  | –   | Vdc                        |
| Output Noise Voltage ( $T_A = 25^\circ\text{C}$ )                                      | $V_n$               | –       | 10   | –   | –       | 10   | –   | $\mu\text{V}/V_O$          |
| 10 Hz $\leq f \leq 100\text{ kHz}$                                                     |                     |         |      |     |         |      |     |                            |
| Output Resistance $f = 1.0\text{ kHz}$                                                 | $r_O$               | –       | 0.9  | –   | –       | 0.9  | –   | $\text{m}\Omega$           |
| Short Circuit Current Limit ( $T_A = 25^\circ\text{C}$ )                               | $I_{SC}$            | –       | 0.2  | –   | –       | 0.2  | –   | A                          |
| $V_{in} = 35\text{ Vdc}$                                                               |                     |         |      |     |         |      |     |                            |
| Peak Output Current ( $T_J = 25^\circ\text{C}$ )                                       | $I_{max}$           | –       | 2.2  | –   | –       | 2.2  | –   | A                          |
| Average Temperature Coefficient of Output Voltage                                      | $\text{TCV}_O$      | –       | –0.4 | –   | –       | –0.4 | –   | $\text{mV}/^\circ\text{C}$ |

9.  $T_{low} = 0^\circ\text{C}$  for MC78XXAC, C  $T_{high} = +125^\circ\text{C}$  for MC78XXAC, C, NCV7805  
 $= -40^\circ\text{C}$  for MC78XXB, MC78XXAB, NCV7805

10. Load and line regulation are specified at constant junction temperature. Changes in  $V_O$  due to heating effects must be taken into account separately. Pulse testing with low duty cycle is used.

勝特力材料 886-3-5753170  
 勝特力电子(上海) 86-21-54151736  
 勝特力电子(深圳) 86-755-83298787  
[Http://www.100y.com.tw](http://www.100y.com.tw)

# MC7800, MC7800A, NCV7805

**ELECTRICAL CHARACTERISTICS** ( $V_{in} = 14\text{ V}$ ,  $I_O = 1.0\text{ A}$ ,  $T_J = T_{low}$  to  $T_{high}$  (Note 11), unless otherwise noted)

| Characteristic                                                                                                                                                                                                                                                | Symbol              | MC7808AB/MC7808AC |                    |                   | Unit                       |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------|-------------------|--------------------|-------------------|----------------------------|
|                                                                                                                                                                                                                                                               |                     | Min               | Typ                | Max               |                            |
| Output Voltage ( $T_J = 25^\circ\text{C}$ )                                                                                                                                                                                                                   | $V_O$               | 7.84              | 8.0                | 8.16              | Vdc                        |
| Output Voltage ( $5.0\text{ mA} \leq I_O \leq 1.0\text{ A}$ , $P_D \leq 15\text{ W}$ )<br>$10.6\text{ Vdc} \leq V_{in} \leq 23\text{ Vdc}$                                                                                                                    | $V_O$               | 7.7               | 8.0                | 8.3               | Vdc                        |
| Line Regulation (Note 12)<br>$10.6\text{ Vdc} \leq V_{in} \leq 25\text{ Vdc}$ , $I_O = 500\text{ mA}$<br>$11\text{ Vdc} \leq V_{in} \leq 17\text{ Vdc}$ , $I_O = 1.0\text{ A}$<br>$10.4\text{ Vdc} \leq V_{in} \leq 23\text{ Vdc}$ , $T_J = 25^\circ\text{C}$ | $\text{Reg}_{line}$ | –                 | 6.0<br>1.7<br>5.0  | 15<br>18<br>15    | mV                         |
| Load Regulation (Note 12)<br>$5.0\text{ mA} \leq I_O \leq 1.5\text{ A}$ , $T_J = 25^\circ\text{C}$<br>$5.0\text{ mA} \leq I_O \leq 1.0\text{ A}$<br>$250\text{ mA} \leq I_O \leq 750\text{ mA}$                                                               | $\text{Reg}_{load}$ | –                 | 1.4<br>1.0<br>0.22 | 25<br>25<br>15    | mV                         |
| Quiescent Current                                                                                                                                                                                                                                             | $I_B$               | –                 | 3.3                | 6.0               | mA                         |
| Quiescent Current Change<br>$11\text{ Vdc} \leq V_{in} \leq 25\text{ Vdc}$ , $I_O = 500\text{ mA}$<br>$10.6\text{ Vdc} \leq V_{in} \leq 23\text{ Vdc}$ , $I_O = 1.0\text{ A}$ , $T_J = 25^\circ\text{C}$<br>$5.0\text{ mA} \leq I_O \leq 1.0\text{ A}$        | $\Delta I_B$        | –                 | –                  | 0.8<br>0.8<br>0.5 | mA                         |
| Ripple Rejection<br>$11.5\text{ Vdc} \leq V_{in} \leq 21.5\text{ Vdc}$ , $f = 120\text{ Hz}$ , $I_O = 500\text{ mA}$                                                                                                                                          | RR                  | 56                | 62                 | –                 | dB                         |
| Dropout Voltage ( $I_O = 1.0\text{ A}$ , $T_J = 25^\circ\text{C}$ )                                                                                                                                                                                           | $V_I - V_O$         | –                 | 2.0                | –                 | Vdc                        |
| Output Noise Voltage ( $T_A = 25^\circ\text{C}$ )<br>$10\text{ Hz} \leq f \leq 100\text{ kHz}$                                                                                                                                                                | $V_n$               | –                 | 10                 | –                 | $\mu\text{V}/V_O$          |
| Output Resistance $f = 1.0\text{ kHz}$                                                                                                                                                                                                                        | $r_O$               | –                 | 0.9                | –                 | $\text{m}\Omega$           |
| Short Circuit Current Limit ( $T_A = 25^\circ\text{C}$ )<br>$V_{in} = 35\text{ Vdc}$                                                                                                                                                                          | $I_{SC}$            | –                 | 0.2                | –                 | A                          |
| Peak Output Current ( $T_J = 25^\circ\text{C}$ )                                                                                                                                                                                                              | $I_{max}$           | –                 | 2.2                | –                 | A                          |
| Average Temperature Coefficient of Output Voltage                                                                                                                                                                                                             | $\text{TCV}_O$      | –                 | –0.4               | –                 | $\text{mV}/^\circ\text{C}$ |

11.  $T_{low} = 0^\circ\text{C}$  for MC78XXAC, C  $T_{high} = +125^\circ\text{C}$  for MC78XXAC, C, NCV7805  
=  $-40^\circ\text{C}$  for MC78XXB, MC78XXAB, NCV7805

12. Load and line regulation are specified at constant junction temperature. Changes in  $V_O$  due to heating effects must be taken into account separately. Pulse testing with low duty cycle is used.

勝特力材料 886-3-5753170  
勝特力电子(上海) 86-21-54151736  
勝特力电子(深圳) 86-755-83298787  
[Http://www.100y.com.tw](http://www.100y.com.tw)

# MC7800, MC7800A, NCV7805

**ELECTRICAL CHARACTERISTICS** ( $V_{in} = 15\text{ V}$ ,  $I_O = 500\text{ mA}$ ,  $T_J = T_{low}$  to  $T_{high}$  (Note 13), unless otherwise noted)

| Characteristic                                                                                                                                            | Symbol              | MC7809B |      |      | MC7809C |      |      | Unit                       |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------|---------|------|------|---------|------|------|----------------------------|
|                                                                                                                                                           |                     | Min     | Typ  | Max  | Min     | Typ  | Max  |                            |
| Output Voltage ( $T_J = 25^\circ\text{C}$ )                                                                                                               | $V_O$               | 8.65    | 9.0  | 9.35 | 8.65    | 9.0  | 9.35 | Vdc                        |
| Output Voltage ( $5.0\text{ mA} \leq I_O \leq 1.0\text{ A}$ , $P_D \leq 15\text{ W}$ )<br>$11.5\text{ Vdc} \leq V_{in} \leq 24\text{ Vdc}$                | $V_O$               | 8.55    | 9.0  | 9.45 | 8.55    | 9.0  | 9.45 | Vdc                        |
| Line Regulation, $T_J = 25^\circ\text{C}$ (Note 14)<br>$11\text{ Vdc} \leq V_{in} \leq 26\text{ Vdc}$<br>$11.5\text{ Vdc} \leq V_{in} \leq 17\text{ Vdc}$ | $\text{Reg}_{line}$ | –       | 6.2  | 32   | –       | 6.2  | 32   | mV                         |
| Load Regulation, $T_J = 25^\circ\text{C}$ (Note 14)<br>$5.0\text{ mA} \leq I_O \leq 1.5\text{ A}$                                                         | $\text{Reg}_{load}$ | –       | 1.5  | 35   | –       | 1.5  | 35   | mV                         |
| Quiescent Current                                                                                                                                         | $I_B$               | –       | 3.4  | 8.0  | –       | 3.4  | 8.0  | mA                         |
| Quiescent Current Change<br>$11.5\text{ Vdc} \leq V_{in} \leq 26\text{ Vdc}$<br>$5.0\text{ mA} \leq I_O \leq 1.0\text{ A}$                                | $\Delta I_B$        | –       | –    | 1.0  | –       | –    | 1.0  | mA                         |
| Ripple Rejection<br>$11.5\text{ Vdc} \leq V_{in} \leq 21.5\text{ Vdc}$ , $f = 120\text{ Hz}$                                                              | RR                  | 56      | 61   | –    | 56      | 61   | –    | dB                         |
| Dropout Voltage ( $I_O = 1.0\text{ A}$ , $T_J = 25^\circ\text{C}$ )                                                                                       | $V_I - V_O$         | –       | 2.0  | –    | –       | 2.0  | –    | Vdc                        |
| Output Noise Voltage ( $T_A = 25^\circ\text{C}$ )<br>$10\text{ Hz} \leq f \leq 100\text{ kHz}$                                                            | $V_n$               | –       | 10   | –    | –       | 10   | –    | $\mu\text{V}/V_O$          |
| Output Resistance $f = 1.0\text{ kHz}$                                                                                                                    | $r_O$               | –       | 1.0  | –    | –       | 1.0  | –    | $\text{m}\Omega$           |
| Short Circuit Current Limit ( $T_A = 25^\circ\text{C}$ )<br>$V_{in} = 35\text{ Vdc}$                                                                      | $I_{sc}$            | –       | 0.2  | –    | –       | 0.2  | –    | A                          |
| Peak Output Current ( $T_J = 25^\circ\text{C}$ )                                                                                                          | $I_{max}$           | –       | 2.2  | –    | –       | 2.2  | –    | A                          |
| Average Temperature Coefficient of Output Voltage                                                                                                         | $\text{TCV}_O$      | –       | –0.5 | –    | –       | –0.5 | –    | $\text{mV}/^\circ\text{C}$ |

13.  $T_{low} = 0^\circ\text{C}$  for MC78XXAC, C  $T_{high} = +125^\circ\text{C}$  for MC78XXAC, C, NCV7805  
=  $-40^\circ\text{C}$  for MC78XXB, MC78XXAB, NCV7805

14. Load and line regulation are specified at constant junction temperature. Changes in  $V_O$  due to heating effects must be taken into account separately. Pulse testing with low duty cycle is used.

勝特力材料 886-3-5753170  
勝特力电子(上海) 86-21-54151736  
勝特力电子(深圳) 86-755-83298787  
[Http://www.100y.com.tw](http://www.100y.com.tw)

# MC7800, MC7800A, NCV7805

**ELECTRICAL CHARACTERISTICS** ( $V_{in} = 15\text{ V}$ ,  $I_O = 1.0\text{ A}$ ,  $T_J = 0^\circ\text{C}$  to  $125^\circ\text{C}$ , unless otherwise noted)

| Characteristic                                                                                                                                                                                                                                                | Symbol       | MC7809AC |      |      | Unit                       |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------|----------|------|------|----------------------------|
|                                                                                                                                                                                                                                                               |              | Min      | Typ  | Max  |                            |
| Output Voltage ( $T_J = 25^\circ\text{C}$ )                                                                                                                                                                                                                   | $V_O$        | 8.82     | 9.0  | 9.18 | Vdc                        |
| Output Voltage ( $5.0\text{ mA} \leq I_O \leq 1.0\text{ A}$ , $P_D \leq 15\text{ W}$ )<br>$11.5\text{ Vdc} \leq V_{in} \leq 24\text{ Vdc}$                                                                                                                    | $V_O$        | 8.65     | 9.0  | 9.35 | Vdc                        |
| Line Regulation (Note 15)<br>$11.5\text{ Vdc} \leq V_{in} \leq 26\text{ Vdc}$ , $I_O = 500\text{ mA}$<br>$12\text{ Vdc} \leq V_{in} \leq 17\text{ Vdc}$ , $I_O = 1.0\text{ A}$<br>$11.5\text{ Vdc} \leq V_{in} \leq 24\text{ Vdc}$ , $T_J = 25^\circ\text{C}$ | Regline      | –        | 6.2  | 16   | mV                         |
| Load Regulation (Note 15)<br>$5.0\text{ mA} \leq I_O \leq 1.5\text{ A}$ , $T_J = 25^\circ\text{C}$<br>$5.0\text{ mA} \leq I_O \leq 1.0\text{ A}$<br>$250\text{ mA} \leq I_O \leq 750\text{ mA}$                                                               | Regload      | –        | –    | 25   | mV                         |
| Quiescent Current                                                                                                                                                                                                                                             | $I_B$        | –        | 3.3  | 6.0  | mA                         |
| Quiescent Current Change<br>$11.5\text{ Vdc} \leq V_{in} \leq 26\text{ Vdc}$ , $I_O = 500\text{ mA}$<br>$11.5\text{ Vdc} \leq V_{in} \leq 24\text{ Vdc}$ , $I_O = 1.0\text{ A}$ , $T_J = 25^\circ\text{C}$<br>$5.0\text{ mA} \leq I_O \leq 1.0\text{ A}$      | $\Delta I_B$ | –        | –    | 0.8  | mA                         |
| Ripple Rejection<br>$11.5\text{ Vdc} \leq V_{in} \leq 21.5\text{ Vdc}$ , $f = 120\text{ Hz}$ , $I_O = 500\text{ mA}$                                                                                                                                          | RR           | 56       | 61   | –    | dB                         |
| Dropout Voltage ( $I_O = 1.0\text{ A}$ , $T_J = 25^\circ\text{C}$ )                                                                                                                                                                                           | $V_{I\_VO}$  |          | 2.0  |      | Vdc                        |
| Output Noise Voltage ( $T_A = 25^\circ\text{C}$ )<br>$10\text{ Hz} \leq f \leq 100\text{ kHz}$                                                                                                                                                                | $V_n$        | –        | 10   | –    | $\mu\text{V}/V_O$          |
| Output Resistance $f = 1.0\text{ kHz}$                                                                                                                                                                                                                        | $r_O$        | –        | 1.0  | –    | $\text{m}\Omega$           |
| Short Circuit Current Limit ( $T_A = 25^\circ\text{C}$ )<br>$V_{in} = 35\text{ Vdc}$                                                                                                                                                                          | $I_{SC}$     | –        | 0.2  |      | A                          |
| Peak Output Current ( $T_J = 25^\circ\text{C}$ )                                                                                                                                                                                                              | $I_{max}$    | –        | 2.2  | –    | A                          |
| Average Temperature Coefficient of Output Voltage                                                                                                                                                                                                             | $TCV_O$      | –        | –0.5 | –    | $\text{mV}/^\circ\text{C}$ |

15. Load and line regulation are specified at constant junction temperature. Changes in  $V_O$  due to heating effects must be taken into account separately. Pulse testing with low duty cycle is used.

勝特力材料 886-3-5753170  
 勝特力电子(上海) 86-21-54151736  
 勝特力电子(深圳) 86-755-83298787  
[Http://www.100y.com.tw](http://www.100y.com.tw)

# MC7800, MC7800A, NCV7805

**ELECTRICAL CHARACTERISTICS** ( $V_{in} = 19\text{ V}$ ,  $I_O = 500\text{ mA}$ ,  $T_J = T_{low}$  to  $T_{high}$  (Note 16), unless otherwise noted)

| Characteristic                                                                              | Symbol              | MC7812B |      |      | MC7812C |      |      | Unit                       |
|---------------------------------------------------------------------------------------------|---------------------|---------|------|------|---------|------|------|----------------------------|
|                                                                                             |                     | Min     | Typ  | Max  | Min     | Typ  | Max  |                            |
| Output Voltage ( $T_J = 25^\circ\text{C}$ )                                                 | $V_O$               | 11.5    | 12   | 12.5 | 11.5    | 12   | 12.5 | Vdc                        |
| Output Voltage ( $5.0\text{ mA} \leq I_O \leq 1.0\text{ A}$ , $P_D \leq 15\text{ W}$ )      | $V_O$               |         |      |      |         |      |      | Vdc                        |
| 14.5 Vdc $\leq V_{in} \leq 27\text{ Vdc}$                                                   |                     | –       | –    | –    | 11.4    | 12   | 12.6 |                            |
| 15.5 Vdc $\leq V_{in} \leq 27\text{ Vdc}$                                                   |                     | 11.4    | 12   | 12.6 | –       | –    | –    |                            |
| Line Regulation, $T_J = 25^\circ\text{C}$ (Note 17)                                         | $\text{Reg}_{line}$ |         |      |      |         |      |      | mV                         |
| 14.5 Vdc $\leq V_{in} \leq 30\text{ Vdc}$                                                   |                     | –       | 7.5  | 240  | –       | 3.8  | 24   |                            |
| 16 Vdc $\leq V_{in} \leq 22\text{ Vdc}$                                                     |                     | –       | 2.2  | 120  | –       | 0.3  | 24   |                            |
| 14.8 Vdc $\leq V_{in} \leq 27\text{ Vdc}$ , $I_O = 1.0\text{ A}$                            |                     | –       | –    | –    | –       | –    | 48   |                            |
| Load Regulation, $T_J = 25^\circ\text{C}$ (Note 17)                                         | $\text{Reg}_{load}$ | –       | 1.6  | 240  | –       | 8.1  | 60   | mV                         |
| 5.0 mA $\leq I_O \leq 1.5\text{ A}$                                                         |                     |         |      |      |         |      |      |                            |
| Quiescent Current                                                                           | $I_B$               | –       | 3.4  | 8.0  | –       | 3.4  | 6.5  | mA                         |
| Quiescent Current Change                                                                    | $\Delta I_B$        |         |      |      |         |      |      | mA                         |
| 14.5 Vdc $\leq V_{in} \leq 30\text{ Vdc}$ , $I_O = 1.0\text{ A}$ , $T_J = 25^\circ\text{C}$ |                     | –       | –    | –    | –       | –    | 0.7  |                            |
| 15 Vdc $\leq V_{in} \leq 30\text{ Vdc}$                                                     |                     | –       | –    | 1.0  | –       | –    | 0.8  |                            |
| 5.0 mA $\leq I_O \leq 1.0\text{ A}$                                                         |                     | –       | –    | 0.5  | –       | –    | 0.5  |                            |
| Ripple Rejection                                                                            | RR                  | –       | 60   | –    | 55      | 60   | –    | dB                         |
| 15 Vdc $\leq V_{in} \leq 25\text{ Vdc}$ , $f = 120\text{ Hz}$                               |                     |         |      |      |         |      |      |                            |
| Dropout Voltage ( $I_O = 1.0\text{ A}$ , $T_J = 25^\circ\text{C}$ )                         | $V_I - V_O$         | –       | 2.0  | –    | –       | 2.0  | –    | Vdc                        |
| Output Noise Voltage ( $T_A = 25^\circ\text{C}$ )                                           | $V_n$               | –       | 10   | –    | –       | 10   | –    | $\mu\text{V}/V_O$          |
| 10 Hz $\leq f \leq 100\text{ kHz}$                                                          |                     |         |      |      |         |      |      |                            |
| Output Resistance $f = 1.0\text{ kHz}$                                                      | $r_O$               | –       | 1.1  | –    | –       | 1.1  | –    | $\text{m}\Omega$           |
| Short Circuit Current Limit ( $T_A = 25^\circ\text{C}$ )                                    | $I_{sc}$            | –       | 0.2  | –    | –       | 0.2  | –    | A                          |
| $V_{in} = 35\text{ Vdc}$                                                                    |                     |         |      |      |         |      |      |                            |
| Peak Output Current ( $T_J = 25^\circ\text{C}$ )                                            | $I_{max}$           | –       | 2.2  | –    | –       | 2.2  | –    | A                          |
| Average Temperature Coefficient of Output Voltage                                           | $\text{TCV}_O$      | –       | –0.8 | –    | –       | –0.8 | –    | $\text{mV}/^\circ\text{C}$ |

16.  $T_{low} = 0^\circ\text{C}$  for MC78XXAC, C  $T_{high} = +125^\circ\text{C}$  for MC78XXAC, C, NCV7805  
 $= -40^\circ\text{C}$  for MC78XXB, MC78XXAB, NCV7805

17. Load and line regulation are specified at constant junction temperature. Changes in  $V_O$  due to heating effects must be taken into account separately. Pulse testing with low duty cycle is used.

勝特力材料 886-3-5753170  
 勝特力电子(上海) 86-21-54151736  
 勝特力电子(深圳) 86-755-83298787  
[Http://www.100y.com.tw](http://www.100y.com.tw)

# MC7800, MC7800A, NCV7805

**ELECTRICAL CHARACTERISTICS** ( $V_{in} = 19\text{ V}$ ,  $I_O = 1.0\text{ A}$ ,  $T_J = T_{low}$  to  $T_{high}$  (Note 18), unless otherwise noted)

| Characteristic                                                                                                                                                                                                                                                | Symbol              | MC7812AB/MC7812AC |                   |                   | Unit                       |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------|-------------------|-------------------|-------------------|----------------------------|
|                                                                                                                                                                                                                                                               |                     | Min               | Typ               | Max               |                            |
| Output Voltage ( $T_J = 25^\circ\text{C}$ )                                                                                                                                                                                                                   | $V_O$               | 11.75             | 12                | 12.25             | Vdc                        |
| Output Voltage ( $5.0\text{ mA} \leq I_O \leq 1.0\text{ A}$ , $P_D \leq 15\text{ W}$ )<br>$14.8\text{ Vdc} \leq V_{in} \leq 27\text{ Vdc}$                                                                                                                    | $V_O$               | 11.5              | 12                | 12.5              | Vdc                        |
| Line Regulation (Note 19)<br>$14.8\text{ Vdc} \leq V_{in} \leq 30\text{ Vdc}$ , $I_O = 500\text{ mA}$<br>$16\text{ Vdc} \leq V_{in} \leq 22\text{ Vdc}$ , $I_O = 1.0\text{ A}$<br>$14.5\text{ Vdc} \leq V_{in} \leq 27\text{ Vdc}$ , $T_J = 25^\circ\text{C}$ | $\text{Reg}_{line}$ | –                 | 3.8<br>2.2<br>6.0 | 18<br>20<br>120   | mV                         |
| Load Regulation (Note 19)<br>$5.0\text{ mA} \leq I_O \leq 1.5\text{ A}$ , $T_J = 25^\circ\text{C}$<br>$5.0\text{ mA} \leq I_O \leq 1.0\text{ A}$                                                                                                              | $\text{Reg}_{load}$ | –                 | –                 | 25<br>25          | mV                         |
| Quiescent Current                                                                                                                                                                                                                                             | $I_B$               | –                 | 3.4               | 6.0               | mA                         |
| Quiescent Current Change<br>$15\text{ Vdc} \leq V_{in} \leq 30\text{ Vdc}$ , $I_O = 500\text{ mA}$<br>$14.8\text{ Vdc} \leq V_{in} \leq 27\text{ Vdc}$ , $T_J = 25^\circ\text{C}$<br>$5.0\text{ mA} \leq I_O \leq 1.0\text{ A}$ , $T_J = 25^\circ\text{C}$    | $\Delta I_B$        | –                 | –                 | 0.8<br>0.8<br>0.5 | mA                         |
| Ripple Rejection<br>$15\text{ Vdc} \leq V_{in} \leq 25\text{ Vdc}$ , $f = 120\text{ Hz}$ , $I_O = 500\text{ mA}$                                                                                                                                              | RR                  | 55                | 60                | –                 | dB                         |
| Dropout Voltage ( $I_O = 1.0\text{ A}$ , $T_J = 25^\circ\text{C}$ )                                                                                                                                                                                           | $V_I - V_O$         | –                 | 2.0               | –                 | Vdc                        |
| Output Noise Voltage ( $T_A = 25^\circ\text{C}$ )<br>$10\text{ Hz} \leq f \leq 100\text{ kHz}$                                                                                                                                                                | $V_n$               | –                 | 10                | –                 | $\mu\text{V}/V_O$          |
| Output Resistance ( $f = 1.0\text{ kHz}$ )                                                                                                                                                                                                                    | $r_O$               | –                 | 1.1               | –                 | $\text{m}\Omega$           |
| Short Circuit Current Limit ( $T_A = 25^\circ\text{C}$ )<br>$V_{in} = 35\text{ Vdc}$                                                                                                                                                                          | $I_{SC}$            | –                 | 0.2               | –                 | A                          |
| Peak Output Current ( $T_J = 25^\circ\text{C}$ )                                                                                                                                                                                                              | $I_{max}$           | –                 | 2.2               | –                 | A                          |
| Average Temperature Coefficient of Output Voltage                                                                                                                                                                                                             | $\text{TCV}_O$      | –                 | –0.8              | –                 | $\text{mV}/^\circ\text{C}$ |

18.  $T_{low} = 0^\circ\text{C}$  for MC78XXAC, C  $T_{high} = +125^\circ\text{C}$  for MC78XXAC, C, NCV7805  
=  $-40^\circ\text{C}$  for MC78XXB, MC78XXAB, NCV7805

19. Load and line regulation are specified at constant junction temperature. Changes in  $V_O$  due to heating effects must be taken into account separately. Pulse testing with low duty cycle is used.

勝特力材料 886-3-5753170  
勝特力电子(上海) 86-21-54151736  
勝特力电子(深圳) 86-755-83298787  
[Http://www.100y.com.tw](http://www.100y.com.tw)

# MC7800, MC7800A, NCV7805

**ELECTRICAL CHARACTERISTICS** ( $V_{in} = 23\text{ V}$ ,  $I_O = 500\text{ mA}$ ,  $T_J = T_{low}$  to  $T_{high}$  (Note 20), unless otherwise noted)

| Characteristic                                                                              | Symbol              | MC7815B |      |       | MC7815C |      |       | Unit                 |
|---------------------------------------------------------------------------------------------|---------------------|---------|------|-------|---------|------|-------|----------------------|
|                                                                                             |                     | Min     | Typ  | Max   | Min     | Typ  | Max   |                      |
| Output Voltage ( $T_J = 25^\circ\text{C}$ )                                                 | $V_O$               | 14.4    | 15   | 15.6  | 14.4    | 15   | 15.6  | Vdc                  |
| Output Voltage ( $5.0\text{ mA} \leq I_O \leq 1.0\text{ A}$ , $P_D \leq 15\text{ W}$ )      | $V_O$               |         |      |       |         |      |       | Vdc                  |
| 17.5 Vdc $\leq V_{in} \leq 30\text{ Vdc}$                                                   |                     | –       | –    | –     | 14.25   | 15   | 15.75 |                      |
| 18.5 Vdc $\leq V_{in} \leq 30\text{ Vdc}$                                                   |                     | 14.25   | 15   | 15.75 | –       | –    | –     |                      |
| Line Regulation, $T_J = 25^\circ\text{C}$ (Note 21)                                         | $\text{Reg}_{line}$ |         |      |       |         |      |       | mV                   |
| 17.9 Vdc $\leq V_{in} \leq 30\text{ Vdc}$                                                   |                     | –       | 8.5  | 300   | –       | 8.5  | 30    |                      |
| 20 Vdc $\leq V_{in} \leq 26\text{ Vdc}$                                                     |                     | –       | 3.0  | 150   | –       | 3.0  | 28    |                      |
| Load Regulation, $T_J = 25^\circ\text{C}$ (Note 21)                                         | $\text{Reg}_{load}$ | –       | 1.8  | 300   | –       | 1.8  | 55    | mV                   |
| 5.0 mA $\leq I_O \leq 1.5\text{ A}$                                                         |                     |         |      |       |         |      |       |                      |
| Quiescent Current                                                                           | $I_B$               | –       | 3.5  | 8.0   | –       | 3.5  | 6.5   | mA                   |
| Quiescent Current Change                                                                    | $\Delta I_B$        |         |      |       |         |      |       | mA                   |
| 17.5 Vdc $\leq V_{in} \leq 30\text{ Vdc}$                                                   |                     | –       | –    | –     | –       | –    | 0.8   |                      |
| 17.5 Vdc $\leq V_{in} \leq 30\text{ Vdc}$ , $I_O = 1.0\text{ A}$ , $T_J = 25^\circ\text{C}$ |                     | –       | –    | 1.0   | –       | –    | 0.7   |                      |
| 5.0 mA $\leq I_O \leq 1.0\text{ A}$                                                         |                     | –       | –    | 0.5   | –       | –    | 0.5   |                      |
| Ripple Rejection                                                                            | RR                  | –       | 58   | –     | 54      | 58   | –     | dB                   |
| 18.5 Vdc $\leq V_{in} \leq 28.5\text{ Vdc}$ , $f = 120\text{ Hz}$                           |                     |         |      |       |         |      |       |                      |
| Dropout Voltage ( $I_O = 1.0\text{ A}$ , $T_J = 25^\circ\text{C}$ )                         | $V_I - V_O$         | –       | 2.0  | –     | –       | 2.0  | –     | Vdc                  |
| Output Noise Voltage ( $T_A = 25^\circ\text{C}$ )                                           | $V_n$               | –       | 10   | –     | –       | 10   | –     | $\mu\text{V}/V_O$    |
| 10 Hz $\leq f \leq 100\text{ kHz}$                                                          |                     |         |      |       |         |      |       |                      |
| Output Resistance $f = 1.0\text{ kHz}$                                                      | $r_O$               | –       | 1.2  | –     | –       | 1.2  | –     | m $\Omega$           |
| Short Circuit Current Limit ( $T_A = 25^\circ\text{C}$ )                                    | $I_{SC}$            | –       | 0.2  | –     | –       | 0.2  | –     | A                    |
| $V_{in} = 35\text{ Vdc}$                                                                    |                     |         |      |       |         |      |       |                      |
| Peak Output Current ( $T_J = 25^\circ\text{C}$ )                                            | $I_{max}$           | –       | 2.2  | –     | –       | 2.2  | –     | A                    |
| Average Temperature Coefficient of Output Voltage                                           | $\text{TCV}_O$      | –       | –1.0 | –     | –       | –1.0 | –     | mV/ $^\circ\text{C}$ |

20.  $T_{low} = 0^\circ\text{C}$  for MC78XXAC, C  $T_{high} = +125^\circ\text{C}$  for MC78XXAC, C, NCV7805  
 =  $-40^\circ\text{C}$  for MC78XXB, MC78XXAB, NCV7805

21. Load and line regulation are specified at constant junction temperature. Changes in  $V_O$  due to heating effects must be taken into account separately. Pulse testing with low duty cycle is used.

勝特力材料 886-3-5753170  
 勝特力电子(上海) 86-21-54151736  
 勝特力电子(深圳) 86-755-83298787  
[Http://www.100y.com.tw](http://www.100y.com.tw)

# MC7800, MC7800A, NCV7805

**ELECTRICAL CHARACTERISTICS** ( $V_{in} = 23\text{ V}$ ,  $I_O = 1.0\text{ A}$ ,  $T_J = T_{low}$  to  $T_{high}$  (Note 22), unless otherwise noted)

| Characteristic                                                                                                                                                                                                                                                | Symbol              | MC7815AB/MC7815AC |                   |                   | Unit                       |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------|-------------------|-------------------|-------------------|----------------------------|
|                                                                                                                                                                                                                                                               |                     | Min               | Typ               | Max               |                            |
| Output Voltage ( $T_J = 25^\circ\text{C}$ )                                                                                                                                                                                                                   | $V_O$               | 14.7              | 15                | 15.3              | Vdc                        |
| Output Voltage ( $5.0\text{ mA} \leq I_O \leq 1.0\text{ A}$ , $P_D \leq 15\text{ W}$ )<br>$17.9\text{ Vdc} \leq V_{in} \leq 30\text{ Vdc}$                                                                                                                    | $V_O$               | 14.4              | 15                | 15.6              | Vdc                        |
| Line Regulation (Note 23)<br>$17.9\text{ Vdc} \leq V_{in} \leq 30\text{ Vdc}$ , $I_O = 500\text{ mA}$<br>$20\text{ Vdc} \leq V_{in} \leq 26\text{ Vdc}$<br>$17.5\text{ Vdc} \leq V_{in} \leq 30\text{ Vdc}$ , $I_O = 1.0\text{ A}$ , $T_J = 25^\circ\text{C}$ | $\text{Reg}_{line}$ | –                 | 8.5<br>3.0<br>7.0 | 20<br>22<br>20    | mV                         |
| Load Regulation (Note 23)<br>$5.0\text{ mA} \leq I_O \leq 1.5\text{ A}$ , $T_J = 25^\circ\text{C}$<br>$5.0\text{ mA} \leq I_O \leq 1.0\text{ A}$<br>$250\text{ mA} \leq I_O \leq 750\text{ mA}$                                                               | $\text{Reg}_{load}$ | –                 | 1.8<br>1.5<br>1.2 | 25<br>25<br>15    | mV                         |
| Quiescent Current                                                                                                                                                                                                                                             | $I_B$               | –                 | 3.5               | 6.0               | mA                         |
| Quiescent Current Change<br>$17.5\text{ Vdc} \leq V_{in} \leq 30\text{ Vdc}$ , $I_O = 500\text{ mA}$<br>$17.5\text{ Vdc} \leq V_{in} \leq 30\text{ Vdc}$ , $I_O = 1.0\text{ A}$ , $T_J = 25^\circ\text{C}$<br>$5.0\text{ mA} \leq I_O \leq 1.0\text{ A}$      | $\Delta I_B$        | –                 | –                 | 0.8<br>0.8<br>0.5 | mA                         |
| Ripple Rejection<br>$18.5\text{ Vdc} \leq V_{in} \leq 28.5\text{ Vdc}$ , $f = 120\text{ Hz}$ , $I_O = 500\text{ mA}$                                                                                                                                          | RR                  | 60                | 80                | –                 | dB                         |
| Dropout Voltage ( $I_O = 1.0\text{ A}$ , $T_J = 25^\circ\text{C}$ )                                                                                                                                                                                           | $V_I - V_O$         | –                 | 2.0               | –                 | Vdc                        |
| Output Noise Voltage ( $T_A = 25^\circ\text{C}$ )<br>$10\text{ Hz} \leq f \leq 100\text{ kHz}$                                                                                                                                                                | $V_n$               | –                 | 10                | –                 | $\mu\text{V}/V_O$          |
| Output Resistance $f = 1.0\text{ kHz}$                                                                                                                                                                                                                        | $r_O$               | –                 | 1.2               | –                 | $\text{m}\Omega$           |
| Short Circuit Current Limit ( $T_A = 25^\circ\text{C}$ )<br>$V_{in} = 35\text{ Vdc}$                                                                                                                                                                          | $I_{SC}$            | –                 | 0.2               | –                 | A                          |
| Peak Output Current ( $T_J = 25^\circ\text{C}$ )                                                                                                                                                                                                              | $I_{max}$           | –                 | 2.2               | –                 | A                          |
| Average Temperature Coefficient of Output Voltage                                                                                                                                                                                                             | $\text{TCV}_O$      | –                 | –1.0              | –                 | $\text{mV}/^\circ\text{C}$ |

22.  $T_{low} = 0^\circ\text{C}$  for MC78XXAC, C  $T_{high} = +125^\circ\text{C}$  for MC78XXAC, C, NCV7805  
=  $-40^\circ\text{C}$  for MC78XXB, MC78XXAB, NCV7805

23. Load and line regulation are specified at constant junction temperature. Changes in  $V_O$  due to heating effects must be taken into account separately. Pulse testing with low duty cycle is used.

勝特力材料 886-3-5753170  
勝特力电子(上海) 86-21-54151736  
勝特力电子(深圳) 86-755-83298787  
[Http://www.100y.com.tw](http://www.100y.com.tw)

# MC7800, MC7800A, NCV7805

**ELECTRICAL CHARACTERISTICS** ( $V_{in} = 27\text{ V}$ ,  $I_O = 500\text{ mA}$ ,  $T_J = T_{low}$  to  $T_{high}$  (Note 24), unless otherwise noted)

| Characteristic                                                                         | Symbol              | MC7818B |      |      | MC7818C |      |      | Unit                       |
|----------------------------------------------------------------------------------------|---------------------|---------|------|------|---------|------|------|----------------------------|
|                                                                                        |                     | Min     | Typ  | Max  | Min     | Typ  | Max  |                            |
| Output Voltage ( $T_J = 25^\circ\text{C}$ )                                            | $V_O$               | 17.3    | 18   | 18.7 | 17.3    | 18   | 18.7 | Vdc                        |
| Output Voltage ( $5.0\text{ mA} \leq I_O \leq 1.0\text{ A}$ , $P_D \leq 15\text{ W}$ ) | $V_O$               |         |      |      |         |      |      | Vdc                        |
| 21 Vdc $\leq V_{in} \leq 33\text{ Vdc}$                                                |                     | –       | –    | –    | 17.1    | 18   | 18.9 |                            |
| 22 Vdc $\leq V_{in} \leq 33\text{ Vdc}$                                                |                     | 17.1    | 18   | 18.9 | –       | –    | –    |                            |
| Line Regulation, (Note 25)                                                             | $\text{Reg}_{line}$ |         |      |      |         |      |      | mV                         |
| 21 Vdc $\leq V_{in} \leq 33\text{ Vdc}$                                                |                     | –       | 9.5  | 360  | –       | 9.5  | 50   |                            |
| 24 Vdc $\leq V_{in} \leq 30\text{ Vdc}$                                                |                     | –       | 3.2  | 180  | –       | 3.2  | 25   |                            |
| Load Regulation, (Note 25)                                                             | $\text{Reg}_{load}$ | –       | 2.0  | 360  | –       | 2.0  | 55   | mV                         |
| 5.0 mA $\leq I_O \leq 1.5\text{ A}$                                                    |                     |         |      |      |         |      |      |                            |
| Quiescent Current                                                                      | $I_B$               | –       | 3.5  | 8.0  | –       | 3.5  | 6.5  | mA                         |
| Quiescent Current Change                                                               | $\Delta I_B$        |         |      |      |         |      |      | mA                         |
| 21 Vdc $\leq V_{in} \leq 33\text{ Vdc}$                                                |                     | –       | –    | –    | –       | –    | 1.0  |                            |
| 5.0 mA $\leq I_O \leq 1.0\text{ A}$                                                    |                     | –       | –    | 0.5  | –       | –    | 0.5  |                            |
| Ripple Rejection                                                                       | $RR$                | –       | 57   | –    | 53      | 57   | –    | dB                         |
| 22 Vdc $\leq V_{in} \leq 33\text{ Vdc}$ , $f = 120\text{ Hz}$                          |                     |         |      |      |         |      |      |                            |
| Dropout Voltage ( $I_O = 1.0\text{ A}$ , $T_J = 25^\circ\text{C}$ )                    | $V_{il} - V_O$      | –       | 2.0  | –    | –       | 2.0  | –    | Vdc                        |
| Output Noise Voltage ( $T_A = 25^\circ\text{C}$ )                                      | $V_n$               | –       | 10   | –    | –       | 10   | –    | $\mu\text{V}/V_O$          |
| 10 Hz $\leq f \leq 100\text{ kHz}$                                                     |                     |         |      |      |         |      |      |                            |
| Output Resistance $f = 1.0\text{ kHz}$                                                 | $r_O$               | –       | 1.3  | –    | –       | 1.3  | –    | $\text{m}\Omega$           |
| Short Circuit Current Limit ( $T_A = 25^\circ\text{C}$ )                               | $I_{sc}$            | –       | 0.2  | –    | –       | 0.2  | –    | A                          |
| $V_{in} = 35\text{ Vdc}$                                                               |                     |         |      |      |         |      |      |                            |
| Peak Output Current ( $T_J = 25^\circ\text{C}$ )                                       | $I_{max}$           | –       | 2.2  | –    | –       | 2.2  | –    | A                          |
| Average Temperature Coefficient of Output Voltage                                      | $\text{TCV}_O$      | –       | –1.5 | –    | –       | –1.5 | –    | $\text{mV}/^\circ\text{C}$ |

24.  $T_{low} = 0^\circ\text{C}$  for MC78XXAC, C  $T_{high} = +125^\circ\text{C}$  for MC78XXAC, C, NCV7805  
 =  $-40^\circ\text{C}$  for MC78XXB, MC78XXAB, NCV7805

25. Load and line regulation are specified at constant junction temperature. Changes in  $V_O$  due to heating effects must be taken into account separately. Pulse testing with low duty cycle is used.

勝特力材料 886-3-5753170  
 勝特力电子(上海) 86-21-54151736  
 勝特力电子(深圳) 86-755-83298787  
[Http://www.100y.com.tw](http://www.100y.com.tw)

# MC7800, MC7800A, NCV7805

**ELECTRICAL CHARACTERISTICS** ( $V_{in} = 27\text{ V}$ ,  $I_O = 1.0\text{ A}$ ,  $T_J = T_{low}$  to  $T_{high}$  (Note 26), unless otherwise noted)

| Characteristic                                                                                                                                                                                                                                                                                                                                                                         | Symbol              | MC7818AC |                          |                        | Unit                       |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------|----------|--------------------------|------------------------|----------------------------|
|                                                                                                                                                                                                                                                                                                                                                                                        |                     | Min      | Typ                      | Max                    |                            |
| Output Voltage ( $T_J = 25^\circ\text{C}$ )                                                                                                                                                                                                                                                                                                                                            | $V_O$               | 17.64    | 18                       | 18.36                  | Vdc                        |
| Output Voltage ( $5.0\text{ mA} \leq I_O \leq 1.0\text{ A}$ , $P_D \leq 15\text{ W}$ )<br>$21\text{ Vdc} \leq V_{in} \leq 33\text{ Vdc}$                                                                                                                                                                                                                                               | $V_O$               | 17.3     | 18                       | 18.7                   | Vdc                        |
| Line Regulation (Note 27)<br>$21\text{ Vdc} \leq V_{in} \leq 33\text{ Vdc}$ , $I_O = 500\text{ mA}$<br>$24\text{ Vdc} \leq V_{in} \leq 30\text{ Vdc}$ , $I_O = 1.0\text{ A}$<br>$24\text{ Vdc} \leq V_{in} \leq 30\text{ Vdc}$ , $I_O = 1.0\text{ A}$ , $T_J = 25^\circ\text{C}$<br>$20.6\text{ Vdc} \leq V_{in} \leq 33\text{ Vdc}$ , $I_O = 1.0\text{ A}$ , $T_J = 25^\circ\text{C}$ | $\text{Reg}_{line}$ | –        | 9.5<br>3.2<br>3.2<br>8.0 | 22<br>25<br>10.5<br>22 | mV                         |
| Load Regulation (Note 27)<br>$5.0\text{ mA} \leq I_O \leq 1.5\text{ A}$ , $T_J = 25^\circ\text{C}$<br>$5.0\text{ mA} \leq I_O \leq 1.0\text{ A}$<br>$250\text{ mA} \leq I_O \leq 750\text{ mA}$                                                                                                                                                                                        | $\text{Reg}_{load}$ | –        | 2.0<br>1.8<br>1.5        | 25<br>25<br>15         | mV                         |
| Quiescent Current                                                                                                                                                                                                                                                                                                                                                                      | $I_B$               | –        | 3.5                      | 6.0                    | mA                         |
| Quiescent Current Change<br>$21\text{ Vdc} \leq V_{in} \leq 33\text{ Vdc}$ , $I_O = 500\text{ mA}$<br>$21.5\text{ Vdc} \leq V_{in} \leq 30\text{ Vdc}$ , $T_J = 25^\circ\text{C}$<br>$5.0\text{ mA} \leq I_O \leq 1.0\text{ A}$                                                                                                                                                        | $\Delta I_B$        | –        | –                        | 0.8<br>0.8<br>0.5      | mA                         |
| Ripple Rejection<br>$22\text{ Vdc} \leq V_{in} \leq 32\text{ Vdc}$ , $f = 120\text{ Hz}$ , $I_O = 500\text{ mA}$                                                                                                                                                                                                                                                                       | RR                  | 53       | 57                       | –                      | dB                         |
| Dropout Voltage ( $I_O = 1.0\text{ A}$ , $T_J = 25^\circ\text{C}$ )                                                                                                                                                                                                                                                                                                                    | $V_I - V_O$         | –        | 2.0                      | –                      | Vdc                        |
| Output Noise Voltage ( $T_A = 25^\circ\text{C}$ )<br>$10\text{ Hz} \leq f \leq 100\text{ kHz}$                                                                                                                                                                                                                                                                                         | $V_n$               | –        | 10                       | –                      | $\mu\text{V}/V_O$          |
| Output Resistance $f = 1.0\text{ kHz}$                                                                                                                                                                                                                                                                                                                                                 | $r_O$               | –        | 1.3                      | –                      | $\text{m}\Omega$           |
| Short Circuit Current Limit ( $T_A = 25^\circ\text{C}$ )<br>$V_{in} = 35\text{ Vdc}$                                                                                                                                                                                                                                                                                                   | $I_{sc}$            | –        | 0.2                      | –                      | A                          |
| Peak Output Current ( $T_J = 25^\circ\text{C}$ )                                                                                                                                                                                                                                                                                                                                       | $I_{max}$           | –        | 2.2                      | –                      | A                          |
| Average Temperature Coefficient of Output Voltage                                                                                                                                                                                                                                                                                                                                      | $\text{TCV}_O$      | –        | –1.5                     | –                      | $\text{mV}/^\circ\text{C}$ |

26.  $T_{low} = 0^\circ\text{C}$  for MC78XXAC, C  $T_{high} = +125^\circ\text{C}$  for MC78XXAC, C, NCV7805  
=  $-40^\circ\text{C}$  for MC78XXB, MC78XXAB, NCV7805

27. Load and line regulation are specified at constant junction temperature. Changes in  $V_O$  due to heating effects must be taken into account separately. Pulse testing with low duty cycle is used.

勝特力材料 886-3-5753170  
勝特力电子(上海) 86-21-54151736  
勝特力电子(深圳) 86-755-83298787  
[Http://www.100y.com.tw](http://www.100y.com.tw)

# MC7800, MC7800A, NCV7805

**ELECTRICAL CHARACTERISTICS** ( $V_{in} = 33\text{ V}$ ,  $I_O = 500\text{ mA}$ ,  $T_J = T_{low}$  to  $T_{high}$  (Note 28), unless otherwise noted)

| Characteristic                                                                         | Symbol              | MC7824B |      |      | MC7824C |      |      | Unit                       |
|----------------------------------------------------------------------------------------|---------------------|---------|------|------|---------|------|------|----------------------------|
|                                                                                        |                     | Min     | Typ  | Max  | Min     | Typ  | Max  |                            |
| Output Voltage ( $T_J = 25^\circ\text{C}$ )                                            | $V_O$               | 23      | 24   | 25   | 23      | 24   | 25   | Vdc                        |
| Output Voltage ( $5.0\text{ mA} \leq I_O \leq 1.0\text{ A}$ , $P_D \leq 15\text{ W}$ ) | $V_O$               |         |      |      |         |      |      | Vdc                        |
| 27 Vdc $\leq V_{in} \leq 38\text{ Vdc}$                                                |                     | –       | –    | –    | 22.8    | 24   | 25.2 |                            |
| 28 Vdc $\leq V_{in} \leq 38\text{ Vdc}$                                                |                     | 22.8    | 24   | 25.2 | –       | –    | –    |                            |
| Line Regulation, (Note 29)                                                             | $\text{Reg}_{line}$ |         |      |      |         |      |      | mV                         |
| 27 Vdc $\leq V_{in} \leq 38\text{ Vdc}$                                                |                     | –       | 11.5 | 480  | –       | 2.7  | 60   |                            |
| 30 Vdc $\leq V_{in} \leq 36\text{ Vdc}$                                                |                     | –       | 3.8  | 240  | –       | 2.7  | 48   |                            |
| Load Regulation, (Note 29)                                                             | $\text{Reg}_{load}$ | –       | 2.1  | 480  | –       | 4.4  | 65   | mV                         |
| 5.0 mA $\leq I_O \leq 1.5\text{ A}$                                                    |                     |         |      |      |         |      |      |                            |
| Quiescent Current                                                                      | $I_B$               | –       | 3.6  | 8.0  | –       | 3.6  | 6.5  | mA                         |
| Quiescent Current Change                                                               | $\Delta I_B$        |         |      |      |         |      |      | mA                         |
| 27 Vdc $\leq V_{in} \leq 38\text{ Vdc}$                                                |                     | –       | –    | –    | –       | –    | 1.0  |                            |
| 5.0 mA $\leq I_O \leq 1.0\text{ A}$                                                    |                     | –       | –    | 0.5  | –       | –    | 0.5  |                            |
| Ripple Rejection                                                                       | RR                  | –       | 54   | –    | 50      | 54   | –    | dB                         |
| 28 Vdc $\leq V_{in} \leq 38\text{ Vdc}$ , $f = 120\text{ Hz}$                          |                     |         |      |      |         |      |      |                            |
| Dropout Voltage ( $I_O = 1.0\text{ A}$ , $T_J = 25^\circ\text{C}$ )                    | $V_I - V_O$         | –       | 2.0  | –    | –       | 2.0  | –    | Vdc                        |
| Output Noise Voltage ( $T_A = 25^\circ\text{C}$ )                                      | $V_n$               | –       | 10   | –    | –       | 10   | –    | $\mu\text{V}/V_O$          |
| 10 Hz $\leq f \leq 100\text{ kHz}$                                                     |                     |         |      |      |         |      |      |                            |
| Output Resistance $f = 1.0\text{ kHz}$                                                 | $r_O$               | –       | 1.4  | –    | –       | 1.4  | –    | $\text{m}\Omega$           |
| Short Circuit Current Limit ( $T_A = 25^\circ\text{C}$ )                               | $I_{SC}$            | –       | 0.2  | –    | –       | 0.2  | –    | A                          |
| $V_{in} = 35\text{ Vdc}$                                                               |                     |         |      |      |         |      |      |                            |
| Peak Output Current ( $T_J = 25^\circ\text{C}$ )                                       | $I_{max}$           | –       | 2.2  | –    | –       | 2.2  | –    | A                          |
| Average Temperature Coefficient of Output Voltage                                      | $\text{TCV}_O$      | –       | –2.0 | –    | –       | –2.0 | –    | $\text{mV}/^\circ\text{C}$ |

28.  $T_{low} = 0^\circ\text{C}$  for MC78XXAC, C  $T_{high} = +125^\circ\text{C}$  for MC78XXAC, C, NCV7805  
 =  $-40^\circ\text{C}$  for MC78XXB, MC78XXAB, NCV7805

29. Load and line regulation are specified at constant junction temperature. Changes in  $V_O$  due to heating effects must be taken into account separately. Pulse testing with low duty cycle is used.

勝特力材料 886-3-5753170  
 勝特力电子(上海) 86-21-54151736  
 勝特力电子(深圳) 86-755-83298787  
[Http://www.100y.com.tw](http://www.100y.com.tw)

# MC7800, MC7800A, NCV7805

**ELECTRICAL CHARACTERISTICS** ( $V_{in} = 33\text{ V}$ ,  $I_O = 1.0\text{ A}$ ,  $T_J = T_{low}$  to  $T_{high}$  (Note 30), unless otherwise noted)

| Characteristic                                                                                                                                                                                                                                                                                                                                                  | Symbol              | MC7824AC |                          |                      | Unit                       |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------|----------|--------------------------|----------------------|----------------------------|
|                                                                                                                                                                                                                                                                                                                                                                 |                     | Min      | Typ                      | Max                  |                            |
| Output Voltage ( $T_J = 25^\circ\text{C}$ )                                                                                                                                                                                                                                                                                                                     | $V_O$               | 23.5     | 24                       | 24.5                 | Vdc                        |
| Output Voltage ( $5.0\text{ mA} \leq I_O \leq 1.0\text{ A}$ , $P_D \leq 15\text{ W}$ )<br>$27.3\text{ Vdc} \leq V_{in} \leq 38\text{ Vdc}$                                                                                                                                                                                                                      | $V_O$               | 23.2     | 24                       | 25.8                 | Vdc                        |
| Line Regulation (Note 31)<br>$27\text{ Vdc} \leq V_{in} \leq 38\text{ Vdc}$ , $I_O = 500\text{ mA}$<br>$30\text{ Vdc} \leq V_{in} \leq 36\text{ Vdc}$ , $I_O = 1.0\text{ A}$<br>$30\text{ Vdc} \leq V_{in} \leq 36\text{ Vdc}$ , $T_J = 25^\circ\text{C}$<br>$26.7\text{ Vdc} \leq V_{in} \leq 38\text{ Vdc}$ , $I_O = 1.0\text{ A}$ , $T_J = 25^\circ\text{C}$ | $\text{Reg}_{line}$ | –        | 11.5<br>3.8<br>3.8<br>10 | 25<br>28<br>12<br>25 | mV                         |
| Load Regulation (Note 31)<br>$5.0\text{ mA} \leq I_O \leq 1.5\text{ A}$ , $T_J = 25^\circ\text{C}$<br>$5.0\text{ mA} \leq I_O \leq 1.0\text{ A}$<br>$250\text{ mA} \leq I_O \leq 750\text{ mA}$                                                                                                                                                                 | $\text{Reg}_{load}$ | –        | 2.1<br>2.0<br>1.8        | 15<br>25<br>15       | mV                         |
| Quiescent Current                                                                                                                                                                                                                                                                                                                                               | $I_B$               | –        | 3.6                      | 6.0                  | mA                         |
| Quiescent Current Change<br>$27.3\text{ Vdc} \leq V_{in} \leq 38\text{ Vdc}$ , $I_O = 500\text{ mA}$<br>$27\text{ Vdc} \leq V_{in} \leq 38\text{ Vdc}$ , $T_J = 25^\circ\text{C}$<br>$5.0\text{ mA} \leq I_O \leq 1.0\text{ A}$                                                                                                                                 | $\Delta I_B$        | –        | –                        | 0.8<br>0.8<br>0.5    | mA                         |
| Ripple Rejection<br>$28\text{ Vdc} \leq V_{in} \leq 38\text{ Vdc}$ , $f = 120\text{ Hz}$ , $I_O = 500\text{ mA}$                                                                                                                                                                                                                                                | RR                  | 45       | 54                       | –                    | dB                         |
| Dropout Voltage ( $I_O = 1.0\text{ A}$ , $T_J = 25^\circ\text{C}$ )                                                                                                                                                                                                                                                                                             | $V_I - V_O$         | –        | 2.0                      | –                    | Vdc                        |
| Output Noise Voltage ( $T_A = 25^\circ\text{C}$ )<br>$10\text{ Hz} \leq f \leq 100\text{ kHz}$                                                                                                                                                                                                                                                                  | $V_n$               | –        | 10                       | –                    | $\mu\text{V}/V_O$          |
| Output Resistance ( $f = 1.0\text{ kHz}$ )                                                                                                                                                                                                                                                                                                                      | $r_O$               | –        | 1.4                      | –                    | $\text{m}\Omega$           |
| Short Circuit Current Limit ( $T_A = 25^\circ\text{C}$ )<br>$V_{in} = 35\text{ Vdc}$                                                                                                                                                                                                                                                                            | $I_{sc}$            | –        | 0.2                      | –                    | A                          |
| Peak Output Current ( $T_J = 25^\circ\text{C}$ )                                                                                                                                                                                                                                                                                                                | $I_{max}$           | –        | 2.2                      | –                    | A                          |
| Average Temperature Coefficient of Output Voltage                                                                                                                                                                                                                                                                                                               | $\text{TCV}_O$      | –        | –2.0                     | –                    | $\text{mV}/^\circ\text{C}$ |

30.  $T_{low} = 0^\circ\text{C}$  for MC78XXAC, C  $T_{high} = +125^\circ\text{C}$  for MC78XXAC, C, NCV7805  
=  $-40^\circ\text{C}$  for MC78XXB, MC78XXAB, NCV7805

31. Load and line regulation are specified at constant junction temperature. Changes in  $V_O$  due to heating effects must be taken into account separately. Pulse testing with low duty cycle is used.

勝特力材料 886-3-5753170  
勝特力电子(上海) 86-21-54151736  
勝特力电子(深圳) 86-755-83298787  
[Http://www.100y.com.tw](http://www.100y.com.tw)

## MC7800, MC7800A, NCV7805

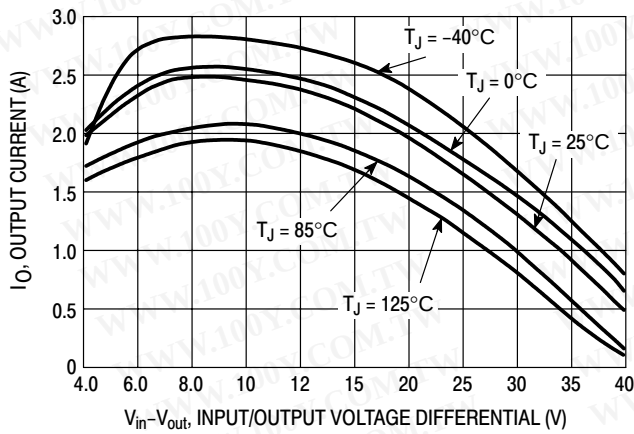


Figure 2. Peak Output Current as a Function of Input/Output Differential Voltage (MC78XXC, AC, B)

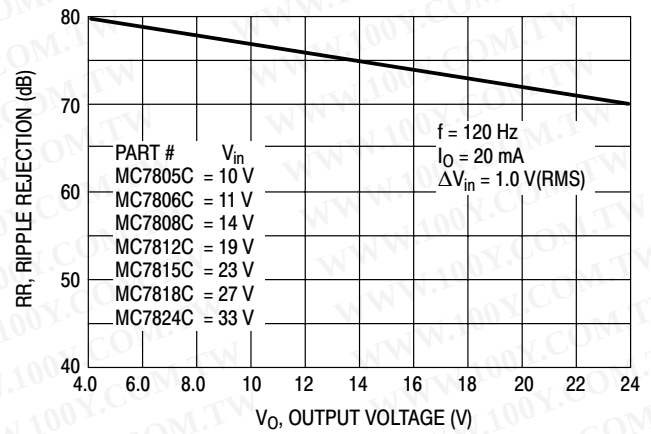


Figure 3. Ripple Rejection as a Function of Output Voltages (MC78XXC, AC, B)

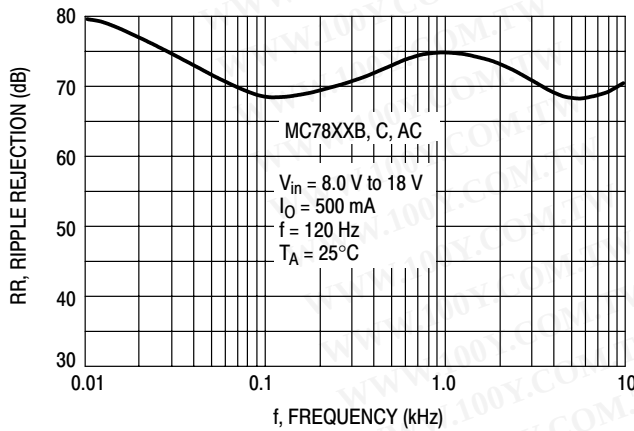


Figure 4. Ripple Rejection as a Function of Frequency (MC78XXC, AC, B)

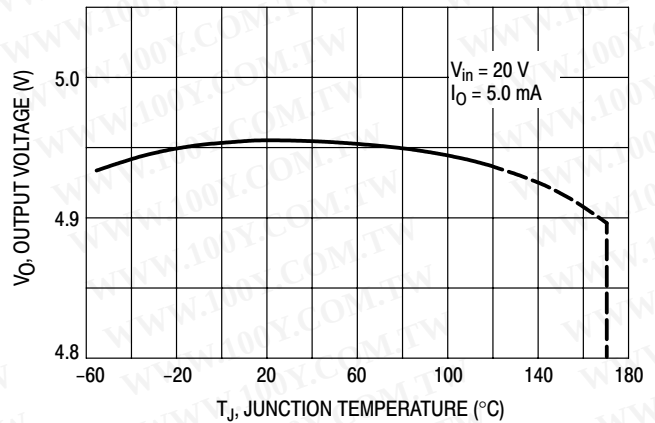


Figure 5. Output Voltage as a Function of Junction Temperature (MC7805C, AC, B)

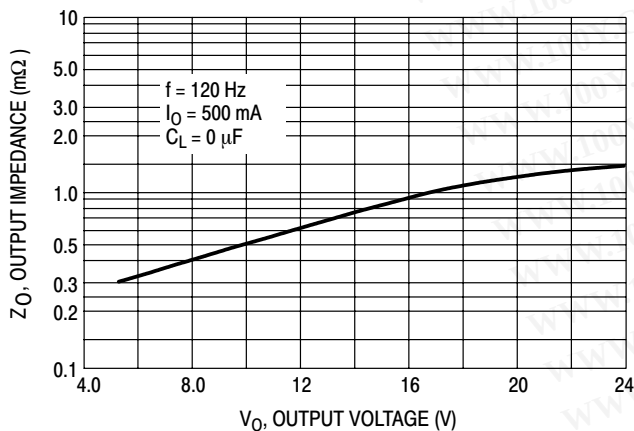


Figure 6. Output Impedance as a Function of Output Voltage (MC78XXC, AC, B)

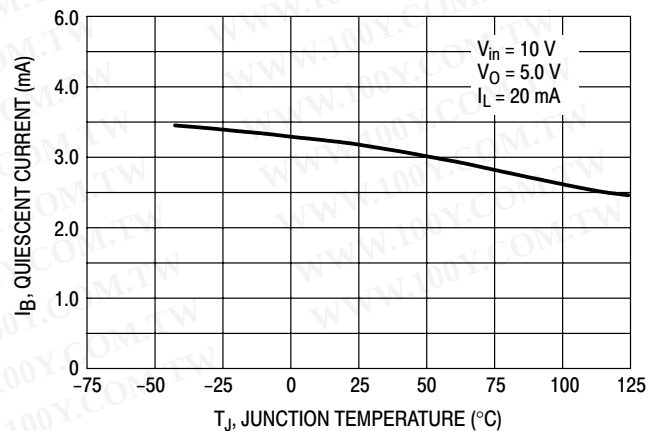


Figure 7. Quiescent Current as a Function of Temperature (MC78XXC, AC, B)

勝特力材料 886-3-5753170  
 勝特力电子(上海) 86-21-54151736  
 勝特力电子(深圳) 86-755-83298787  
[Http://www.100y.com.tw](http://www.100y.com.tw)


## APPLICATIONS INFORMATION

### Design Considerations

The MC7800 Series of fixed voltage regulators are designed with Thermal Overload Protection that shuts down the circuit when subjected to an excessive power overload condition, Internal Short Circuit Protection that limits the maximum current the circuit will pass, and Output Transistor Safe-Area Compensation that reduces the output short circuit current as the voltage across the pass transistor is increased.

In many low current applications, compensation capacitors are not required. However, it is recommended that the regulator input be bypassed with a capacitor if the regulator is connected to the power supply filter with long

wire lengths, or if the output load capacitance is large. An input bypass capacitor should be selected to provide good high-frequency characteristics to insure stable operation under all load conditions. A 0.33  $\mu\text{F}$  or larger tantalum, mylar, or other capacitor having low internal impedance at high frequencies should be chosen. The bypass capacitor should be mounted with the shortest possible leads directly across the regulators input terminals. Normally good construction techniques should be used to minimize ground loops and lead resistance drops since the regulator has no external sense lead.

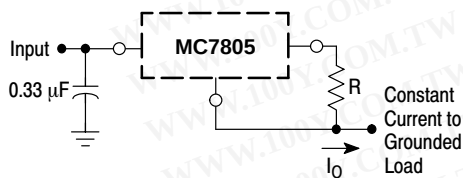


The MC7800 regulators can also be used as a current source when connected as above. In order to minimize dissipation the MC7805C is chosen in this application. Resistor R determines the current as follows:

$$I_O = \frac{5.0 \text{ V}}{R} + I_B$$

$I_B \cong 3.2 \text{ mA}$  over line and load changes.


For example, a 1.0 A current source would require R to be a 5.0  $\Omega$ , 10 W resistor and the output voltage compliance would be the input voltage less 7.0 V.

Figure 8. Current Regulator

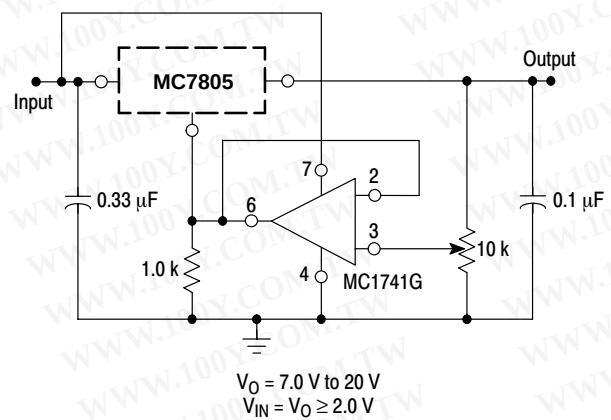

The addition of an operational amplifier allows adjustment to higher or intermediate values while retaining regulation characteristics. The minimum voltage obtainable with this arrangement is 2.0 V greater than the regulator voltage.


Figure 9. Adjustable Output Regulator

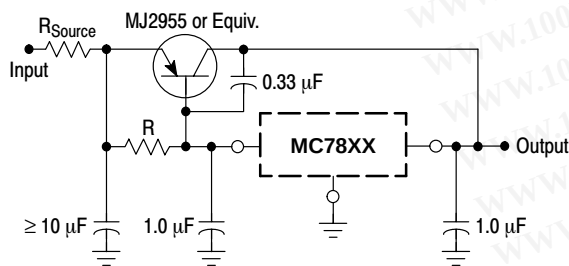

XX = 2 digits of type number indicating voltage.

The MC7800 series can be current boosted with a PNP transistor. The MJ2955 provides current to 5.0 A. Resistor R in conjunction with the  $V_{BE}$  of the PNP determines when the pass transistor begins conducting; this circuit is not short circuit proof. Input/output differential voltage minimum is increased by  $V_{BE}$  of the pass transistor.

Figure 10. Current Boost Regulator

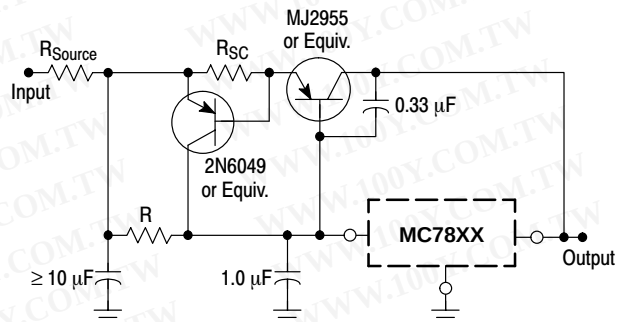

XX = 2 digits of type number indicating voltage.

The circuit of Figure 10 can be modified to provide supply protection against short circuits by adding a short circuit sense resistor,  $R_{SC}$ , and an additional PNP transistor. The current sensing PNP must be able to handle the short circuit current of the three-terminal regulator. Therefore, a four-ampere plastic power transistor is specified.

Figure 11. Short Circuit Protection

勝特力材料 886-3-5753170  
 勝特力电子(上海) 86-21-54151736  
 勝特力电子(深圳) 86-755-83298787  
[Http://www.100y.com.tw](http://www.100y.com.tw)

# MC7800, MC7800A, NCV7805

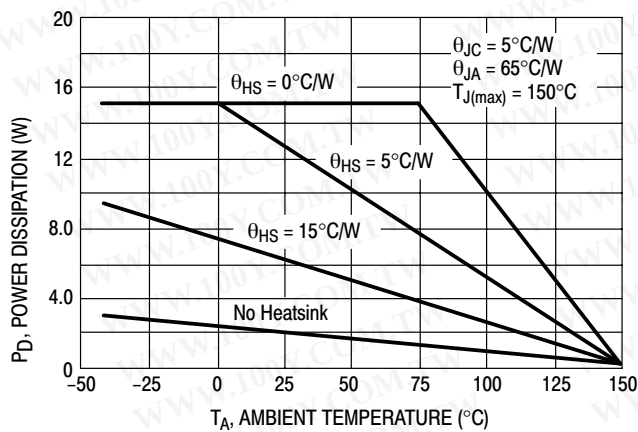


Figure 12. Worst Case Power Dissipation versus Ambient Temperature (Case 221A)

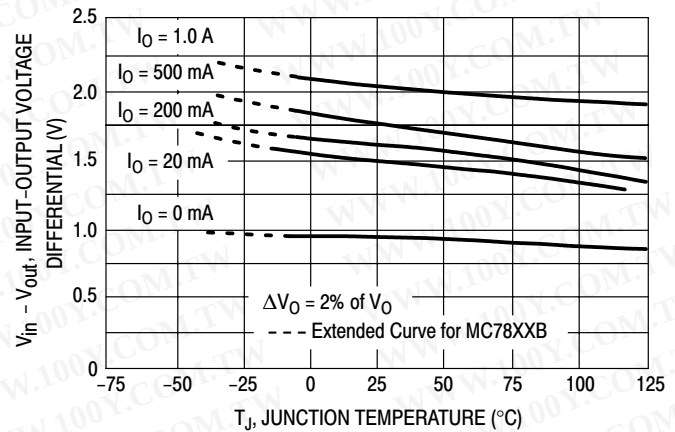


Figure 13. Input Output Differential as a Function of Junction Temperature (MC78XXC, AC, B)

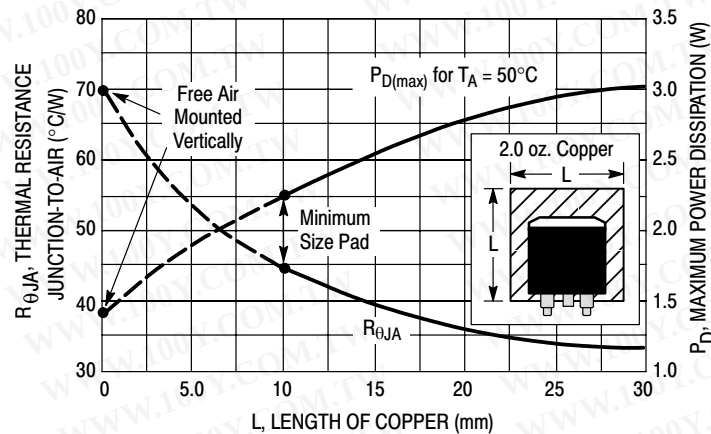


Figure 14. D2PAK Thermal Resistance and Maximum Power Dissipation versus P.C.B. Copper Length

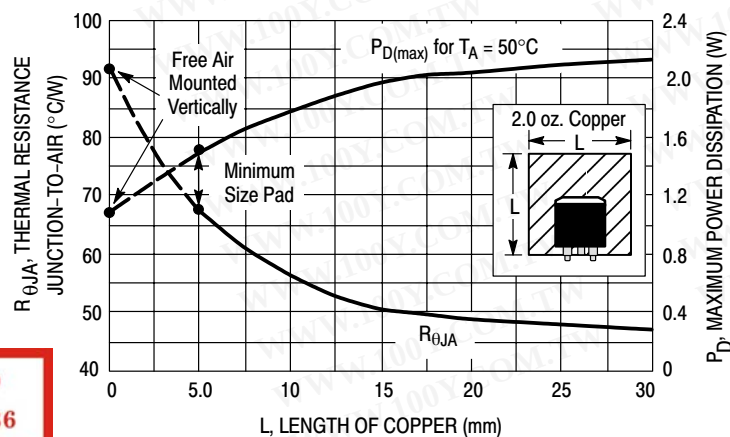


Figure 15. DPAK Thermal Resistance and Maximum Power Dissipation versus P.C.B. Copper Length

勝特力材料 886-3-5753170  
 勝特力电子(上海) 86-21-54151736  
 勝特力电子(深圳) 86-755-83298787  
[Http://www.100y.com.tw](http://www.100y.com.tw)

# MC7800, MC7800A, NCV7805

## DEFINITIONS

**Line Regulation** – The change in output voltage for a change in the input voltage. The measurement is made under conditions of low dissipation or by using pulse techniques such that the average chip temperature is not significantly affected.

**Load Regulation** – The change in output voltage for a change in load current at constant chip temperature.

**Maximum Power Dissipation** – The maximum total device dissipation for which the regulator will operate within specifications.

**Quiescent Current** – That part of the input current that is not delivered to the load.

**Output Noise Voltage** – The rms ac voltage at the output, with constant load and no input ripple, measured over a specified frequency range.

**Long Term Stability** – Output voltage stability under accelerated life test conditions with the maximum rated voltage listed in the devices' electrical characteristics and maximum power dissipation.

勝特力材料 886-3-5753170  
勝特力电子(上海) 86-21-54151736  
勝特力电子(深圳) 86-755-83298787  
[Http://www.100y.com.tw](http://www.100y.com.tw)

## ORDERING INFORMATION

| Device         | Nominal Voltage | Operating Temperature Range | Package                      | Shipping <sup>†</sup> |
|----------------|-----------------|-----------------------------|------------------------------|-----------------------|
| MC7805ABD2T    | 5.0 V           | T = -40°C to +125°C         | D <sup>2</sup> PAK           | 50 Units /Rail        |
| MC7805ABD2TG   |                 |                             | D <sup>2</sup> PAK (Pb-free) | 50 Units /Rail        |
| MC7805ABD2TR4  |                 |                             | D <sup>2</sup> PAK           | 800 / Tape & Reel     |
| MC7805ABD2TR4G |                 |                             | D <sup>2</sup> PAK (Pb-free) | 800 / Tape & Reel     |
| MC7805ABT      |                 |                             | TO 220                       | 50 Units /Rail        |
| MC7805ABTG     |                 |                             | TO 220 (Pb-free)             | 50 Units /Rail        |
| MC7805ACD2T    |                 | T = 0°C to +125°C           | D <sup>2</sup> PAK           | 50 Units /Rail        |
| MC7805ACD2TG   |                 |                             | D <sup>2</sup> PAK (Pb-free) | 50 Units /Rail        |
| MC7805ACD2TR4  |                 |                             | D <sup>2</sup> PAK           | 800 / Tape & Reel     |
| MC7805ACD2TR4G |                 |                             | D <sup>2</sup> PAK (Pb-free) | 800 / Tape & Reel     |
| MC7805ACT      |                 |                             | TO 220                       | 50 Units /Rail        |
| MC7805ACTG     |                 |                             | TO 220 (Pb-free)             | 50 Units /Rail        |
| MC7805BD2T     |                 | T = -40°C to +125°C         | D <sup>2</sup> PAK           | 50 Units /Rail        |
| MC7805BD2TG    |                 |                             | D <sup>2</sup> PAK (Pb-free) | 50 Units /Rail        |
| MC7805BD2TR4   |                 |                             | D <sup>2</sup> PAK           | 800 / Tape & Reel     |
| MC7805BD2TR4G  |                 |                             | D <sup>2</sup> PAK (Pb-free) | 800 / Tape & Reel     |
| MC7805BDT      |                 |                             | DPAK                         | 75 Units / Rail       |
| MC7805BDTG     |                 |                             | DPAK (Pb-free)               | 75 Units / Rail       |
| MC7805BDTRK    |                 |                             | DPAK                         | 2500 / Tape & Reel    |
| MC7805BDTRKG   |                 |                             | DPAK (Pb-free)               | 2500 / Tape & Reel    |

<sup>†</sup>For information on tape and reel specifications, including part orientation and tape sizes, please refer to our Tape and Reel Packaging Specifications Brochure, BRD8011/D.

\*NCV devices: T<sub>low</sub> = -40°C, T<sub>high</sub> = +125°C. Guaranteed by design. NCV prefix is for automotive and other applications requiring site and change control.

# MC7800, MC7800A, NCV7805

## ORDERING INFORMATION

| Device          | Nominal Voltage | Operating Temperature Range | Package                      | Shipping <sup>†</sup> |
|-----------------|-----------------|-----------------------------|------------------------------|-----------------------|
| MC7805BT        |                 |                             | TO 220                       | 50 Units /Rail        |
| MC7805BTG       |                 |                             | TO 220 (Pb-free)             | 50 Units /Rail        |
| NCV7805BD2T*    |                 |                             | D <sup>2</sup> PAK           | 50 Units /Rail        |
| NCV7805BD2TG*   |                 |                             | D <sup>2</sup> PAK (Pb-free) | 50 Units /Rail        |
| NCV7805BD2TR4*  |                 |                             | D <sup>2</sup> PAK           | 800 / Tape & Reel     |
| NCV7805BD2TR4G* |                 |                             | D <sup>2</sup> PAK (Pb-free) | 800 / Tape & Reel     |
| NCV7805BT*      |                 |                             | TO 220                       | 50 Units /Rail        |
| NCV7805BTG*     |                 |                             | TO 220 (Pb-free)             | 50 Units /Rail        |
| MC7805CD2T      |                 | T = 0°C to +125°C           | D <sup>2</sup> PAK           | 50 Units /Rail        |
| MC7805CD2TG     |                 |                             | D <sup>2</sup> PAK (Pb-free) | 50 Units /Rail        |
| MC7805CD2TR4    |                 |                             | D <sup>2</sup> PAK           | 800 / Tape & Reel     |
| MC7805CD2TR4G   |                 |                             | D <sup>2</sup> PAK (Pb-free) | 800 / Tape & Reel     |
| MC7805CDT       |                 |                             | DPAK                         | 75 Units / Rail       |
| MC7805CDTG      |                 |                             | DPAK (Pb-free)               | 75 Units / Rail       |
| MC7805CDTRK     |                 |                             | DPAK                         | 2500 / Tape & Reel    |
| MC7805CDTRKG    |                 |                             | DPAK (Pb-free)               | 2500 / Tape & Reel    |
| MC7805CT        |                 |                             | TO 220                       | 50 Units /Rail        |
| MC7805CTG       |                 |                             | TO 220 (Pb-free)             | 50 Units /Rail        |
| MC7806ACT       |                 | T = 0°C to +125°C           | TO 220                       | 50 Units /Rail        |
| MC7806ACTG      |                 |                             | TO 220 (Pb-free)             | 50 Units /Rail        |
| MC7806BD2T      |                 | T = -40°C to +125°C         | D <sup>2</sup> PAK           | 50 Units /Rail        |
| MC7806BD2TG     |                 |                             | D <sup>2</sup> PAK (Pb-free) | 50 Units /Rail        |
| MC7806BD2TR4    |                 |                             | D <sup>2</sup> PAK           | 800 / Tape & Reel     |
| MC7806BD2TR4G   |                 |                             | D <sup>2</sup> PAK (Pb-free) | 800 / Tape & Reel     |
| MC7806BT        |                 |                             | TO 220                       | 50 Units /Rail        |
| MC7806BTG       |                 |                             | TO 220 (Pb-free)             | 50 Units /Rail        |
| MC7806CT        |                 | T = 0°C to +125°C           | TO 220                       | 50 Units /Rail        |
| MC7806CTG       |                 |                             | TO 220 (Pb-free)             | 50 Units /Rail        |

<sup>†</sup>For information on tape and reel specifications, including part orientation and tape sizes, please refer to our Tape and Reel Packaging Specifications Brochure, BRD8011/D.

\*NCV devices: T<sub>low</sub> = -40°C, T<sub>high</sub> = +125°C. Guaranteed by design. NCV prefix is for automotive and other applications requiring site and change control.

勝特力材料 886-3-5753170  
 勝特力电子(上海) 86-21-54151736  
 勝特力电子(深圳) 86-755-83298787  
[Http://www.100y.com.tw](http://www.100y.com.tw)

# MC7800, MC7800A, NCV7805

勝特力材料 886-3-5753170  
 勝特力电子(上海) 86-21-54151736  
 勝特力电子(深圳) 86-755-83298787  
[Http://www.100y.com.tw](http://www.100y.com.tw)

## ORDERING INFORMATION

| Device         | Nominal Voltage | Operating Temperature Range | Package                      | Shipping <sup>†</sup> |
|----------------|-----------------|-----------------------------|------------------------------|-----------------------|
| MC7808ABD2T    | 8.0 V           | T = -40°C to +125°C         | D <sup>2</sup> PAK           | 50 Units /Rail        |
| MC7808ABD2TG   |                 |                             | D <sup>2</sup> PAK (Pb-free) | 50 Units /Rail        |
| MC7808ABD2TR4  |                 |                             | D <sup>2</sup> PAK           | 800 / Tape & Reel     |
| MC7808ABD2TR4G |                 |                             | D <sup>2</sup> PAK (Pb-free) | 800 / Tape & Reel     |
| MC7808ABT      |                 |                             | TO 220                       | 50 Units /Rail        |
| MC7808ABTG     |                 |                             | TO 220 (Pb-free)             | 50 Units /Rail        |
| MC7808ACT      |                 | T = 0°C to +125°C           | TO 220                       | 50 Units /Rail        |
| MC7808ACTG     |                 |                             | TO 220 (Pb-free)             | 50 Units /Rail        |
| MC7808BD2T     |                 | T = -40°C to +125°C         | D <sup>2</sup> PAK           | 50 Units /Rail        |
| MC7808BD2TG    |                 |                             | D <sup>2</sup> PAK (Pb-free) | 50 Units /Rail        |
| MC7808BD2TR4   |                 |                             | D <sup>2</sup> PAK           | 800 / Tape & Reel     |
| MC7808BD2TR4G  |                 |                             | D <sup>2</sup> PAK (Pb-free) | 800 / Tape & Reel     |
| MC7808BDT      |                 |                             | DPAK                         | 75 Units / Rail       |
| MC7808BDTG     |                 |                             | DPAK (Pb-free)               | 75 Units / Rail       |
| MC7808BDTRK    |                 |                             | DPAK                         | 2500 / Tape & Reel    |
| MC7808BDTRKG   |                 |                             | DPAK (Pb-free)               | 2500 / Tape & Reel    |
| MC7808BT       |                 |                             | TO 220                       | 50 Units /Rail        |
| MC7808BTG      |                 |                             | TO 220 (Pb-free)             | 50 Units /Rail        |
| MC7808CD2T     |                 | T = 0°C to +125°C           | D <sup>2</sup> PAK           | 50 Units /Rail        |
| MC7808CD2TG    |                 |                             | D <sup>2</sup> PAK (Pb-free) | 50 Units /Rail        |
| MC7808CD2TR4   |                 |                             | D <sup>2</sup> PAK           | 800 / Tape & Reel     |
| MC7808CD2TR4G  |                 |                             | D <sup>2</sup> PAK (Pb-free) | 800 / Tape & Reel     |
| MC7808CDT      |                 |                             | DPAK                         | 75 Units / Rail       |
| MC7808CDTG     |                 |                             | DPAK (Pb-free)               | 75 Units / Rail       |
| MC7808CDTRK    |                 |                             | DPAK                         | 2500 / Tape & Reel    |
| MC7808CDTRKG   |                 |                             | DPAK (Pb-free)               | 2500 / Tape & Reel    |
| MC7808CT       |                 |                             | TO 220                       | 50 Units /Rail        |
| MC7808CTG      |                 |                             | TO 220 (Pb-free)             | 50 Units /Rail        |

<sup>†</sup>For information on tape and reel specifications, including part orientation and tape sizes, please refer to our Tape and Reel Packaging Specifications Brochure, BRD8011/D.

\*NCV devices: T<sub>low</sub> = -40°C, T<sub>high</sub> = +125°C. Guaranteed by design. NCV prefix is for automotive and other applications requiring site and change control.

# MC7800, MC7800A, NCV7805

勝特力材料 886-3-5753170  
 勝特力电子(上海) 86-21-54151736  
 勝特力电子(深圳) 86-755-83298787  
[Http://www.100y.com.tw](http://www.100y.com.tw)

## ORDERING INFORMATION

| Device         | Nominal Voltage | Operating Temperature Range | Package                      | Shipping <sup>†</sup> |
|----------------|-----------------|-----------------------------|------------------------------|-----------------------|
| MC7809ACT      | 9.0 V           | T = 0°C to +125°C           | TO 220                       | 50 Units /Rail        |
| MC7809ACTG     |                 |                             | TO 220 (Pb-free)             | 50 Units /Rail        |
| MC7809BT       |                 | T = -40°C to +125°C         | TO 220                       | 50 Units /Rail        |
| MC7809BTG      |                 |                             | TO 220 (Pb-free)             | 50 Units /Rail        |
| MC7809CD2T     |                 | T = 0°C to +125°C           | D <sup>2</sup> PAK           | 50 Units /Rail        |
| MC7809CD2TG    |                 |                             | D <sup>2</sup> PAK (Pb-free) | 50 Units /Rail        |
| MC7809CD2TR4   |                 |                             | D <sup>2</sup> PAK           | 800 / Tape & Reel     |
| MC7809CD2TR4G  |                 |                             | D <sup>2</sup> PAK (Pb-free) | 800 / Tape & Reel     |
| MC7809CT       |                 |                             | TO 220                       | 50 Units /Rail        |
| MC7809CTG      |                 |                             | TO 220 (Pb-free)             | 50 Units /Rail        |
| MC7812ABD2T    | 12 V            | T = -40°C to +125°C         | D <sup>2</sup> PAK           | 50 Units /Rail        |
| MC7812ABD2TG   |                 |                             | D <sup>2</sup> PAK (Pb-free) | 50 Units /Rail        |
| MC7812ABD2TR4  |                 |                             | D <sup>2</sup> PAK           | 800 / Tape & Reel     |
| MC7812ABD2TR4G |                 |                             | D <sup>2</sup> PAK (Pb-free) | 800 / Tape & Reel     |
| MC7812ABT      |                 |                             | TO 220                       | 50 Units /Rail        |
| MC7812ABTG     |                 |                             | TO 220 (Pb-free)             | 50 Units /Rail        |
| MC7812ACD2T    |                 | T = 0°C to +125°C           | D <sup>2</sup> PAK           | 50 Units /Rail        |
| MC7812ACD2TG   |                 |                             | D <sup>2</sup> PAK (Pb-free) | 50 Units /Rail        |
| MC7812ACD2TR4  |                 |                             | D <sup>2</sup> PAK           | 800 / Tape & Reel     |
| MC7812ACD2TR4G |                 |                             | D <sup>2</sup> PAK (Pb-free) | 800 / Tape & Reel     |
| MC7812ACT      |                 |                             | TO 220                       | 50 Units /Rail        |
| MC7812ACTG     |                 |                             | TO 220 (Pb-free)             | 50 Units /Rail        |
| MC7812BD2T     |                 | T = -40°C to +125°C         | D <sup>2</sup> PAK           | 50 Units /Rail        |
| MC7812BD2TG    |                 |                             | D <sup>2</sup> PAK (Pb-free) | 50 Units /Rail        |
| MC7812BD2TR4   |                 |                             | D <sup>2</sup> PAK           | 800 / Tape & Reel     |
| MC7812BD2TR4G  |                 |                             | D <sup>2</sup> PAK (Pb-free) | 800 / Tape & Reel     |
| MC7812BDT      |                 |                             | DPAK                         | 75 Units / Rail       |
| MC7812BDTG     |                 |                             | DPAK (Pb-free)               | 75 Units / Rail       |

<sup>†</sup>For information on tape and reel specifications, including part orientation and tape sizes, please refer to our Tape and Reel Packaging Specifications Brochure, BRD8011/D.

\*NCV devices: T<sub>low</sub> = -40°C, T<sub>high</sub> = +125°C. Guaranteed by design. NCV prefix is for automotive and other applications requiring site and change control.

# MC7800, MC7800A, NCV7805

勝特力材料 886-3-5753170  
 勝特力电子(上海) 86-21-54151736  
 勝特力电子(深圳) 86-755-83298787  
[Http://www.100y.com.tw](http://www.100y.com.tw)

## ORDERING INFORMATION

| Device          | Nominal Voltage | Operating Temperature Range | Package                      | Shipping <sup>†</sup> |
|-----------------|-----------------|-----------------------------|------------------------------|-----------------------|
| MC7812BDTRK     | 12 V            | T = -40°C to +125°C         | DPAK                         | 2500 / Tape & Reel    |
| MC7812BDTRKG    |                 |                             | DPAK (Pb-free)               | 2500 / Tape & Reel    |
| MC7812BT        |                 |                             | TO 220                       | 50 Units /Rail        |
| MC7812BTG       |                 |                             | TO 220 (Pb-free)             | 50 Units /Rail        |
| NCV7812BD2T *   |                 |                             | D <sup>2</sup> PAK           | 50 Units /Rail        |
| NCV7812BD2TR4 * |                 |                             | D <sup>2</sup> PAK           | 800 / Tape & Reel     |
| NCV7812BT *     |                 |                             | TO 220                       | 50 Units /Rail        |
| MC7812CD2T      |                 | T = 0°C to +125°C           | D <sup>2</sup> PAK           | 50 Units /Rail        |
| MC7812CD2TG     |                 |                             | D <sup>2</sup> PAK (Pb-free) | 50 Units /Rail        |
| MC7812CD2TR4    |                 |                             | D <sup>2</sup> PAK           | 800 / Tape & Reel     |
| MC7812CD2TR4G   |                 |                             | D <sup>2</sup> PAK (Pb-free) | 800 / Tape & Reel     |
| MC7812CDT       |                 |                             | DPAK                         | 75 Units / Rail       |
| MC7812CDTG      |                 |                             | DPAK (Pb-free)               | 75 Units / Rail       |
| MC7812CDTRK     |                 |                             | DPAK                         | 2500 / Tape & Reel    |
| MC7812CDTRKG    |                 |                             | DPAK (Pb-free)               | 2500 / Tape & Reel    |
| MC7812CT        |                 |                             | TO 220                       | 50 Units /Rail        |
| MC7812CTG       |                 |                             | TO 220 (Pb-free)             | 50 Units /Rail        |
| MC7815ABD2T     | 15 V            | T = -40°C to +125°C         | D <sup>2</sup> PAK           | 50 Units /Rail        |
| MC7815ABD2TG    |                 |                             | D <sup>2</sup> PAK (Pb-free) | 50 Units /Rail        |
| MC7815ABD2TR4   |                 |                             | D <sup>2</sup> PAK           | 800 / Tape & Reel     |
| MC7815ABD2TR4G  |                 |                             | D <sup>2</sup> PAK (Pb-free) | 800 / Tape & Reel     |
| MC7815ABT       |                 |                             | TO 220                       | 50 Units /Rail        |
| MC7815ABTG      |                 |                             | TO 220 (Pb-free)             | 50 Units /Rail        |
| MC7815ACD2T     |                 | T = 0°C to +125°C           | D <sup>2</sup> PAK           | 50 Units /Rail        |
| MC7815ACD2TG    |                 |                             | D <sup>2</sup> PAK (Pb-free) | 50 Units /Rail        |
| MC7815ACT       |                 |                             | TO 220                       | 50 Units /Rail        |
| MC7815ACTG      |                 |                             | TO 220 (Pb-free)             | 50 Units /Rail        |
| MC7815BD2T      |                 | T = -40°C to +125°C         | D <sup>2</sup> PAK           | 50 Units /Rail        |
| MC7815BD2TG     |                 |                             | D <sup>2</sup> PAK (Pb-free) | 50 Units /Rail        |

<sup>†</sup>For information on tape and reel specifications, including part orientation and tape sizes, please refer to our Tape and Reel Packaging Specifications Brochure, BRD8011/D.

\*NCV devices: T<sub>low</sub> = -40°C, T<sub>high</sub> = +125°C. Guaranteed by design. NCV prefix is for automotive and other applications requiring site and change control.

# MC7800, MC7800A, NCV7805

勝特力材料 886-3-5753170  
 勝特力电子(上海) 86-21-54151736  
 勝特力电子(深圳) 86-755-83298787  
[Http://www.100y.com.tw](http://www.100y.com.tw)

## ORDERING INFORMATION

| Device        | Nominal Voltage | Operating Temperature Range | Package                      | Shipping <sup>†</sup> |
|---------------|-----------------|-----------------------------|------------------------------|-----------------------|
| MC7815BD2TR4  | 15 V            | T = -40°C to +125°C         | D <sup>2</sup> PAK           | 800 / Tape & Reel     |
| MC7815BD2TR4G |                 |                             | D <sup>2</sup> PAK (Pb-free) | 800 / Tape & Reel     |
| MC7815BDT     |                 |                             | DPAK                         | 75 Units / Rail       |
| MC7815BDTG    |                 |                             | DPAK (Pb-free)               | 75 Units / Rail       |
| MC7815BDTRK   |                 |                             | DPAK                         | 2500 / Tape & Reel    |
| MC7815BDTRKG  |                 |                             | DPAK (Pb-free)               | 2500 / Tape & Reel    |
| MC7815BT      |                 |                             | TO 220                       | 50 Units /Rail        |
| MC7815BTG     |                 |                             | TO 220 (Pb-free)             | 50 Units /Rail        |
| MC7815CD2T    |                 | T = 0°C to +125°C           | D <sup>2</sup> PAK           | 50 Units /Rail        |
| MC7815CD2TG   |                 |                             | D <sup>2</sup> PAK (Pb-free) | 50 Units /Rail        |
| MC7815CD2TR4  |                 |                             | D <sup>2</sup> PAK           | 800 / Tape & Reel     |
| MC7815CD2TR4G |                 |                             | D <sup>2</sup> PAK (Pb-free) | 800 / Tape & Reel     |
| MC7815CDT     |                 |                             | DPAK                         | 75 Units / Rail       |
| MC7815CDTG    |                 |                             | DPAK (Pb-free)               | 75 Units / Rail       |
| MC7815CDTRK   |                 |                             | DPAK                         | 2500 / Tape & Reel    |
| MC7815CDTRKG  |                 |                             | DPAK (Pb-free)               | 2500 / Tape & Reel    |
| MC7815CT      |                 |                             | TO 220                       | 50 Units /Rail        |
| MC7815CTG     |                 |                             | TO 220 (Pb-free)             | 50 Units /Rail        |
| MC7818ACT     | 18 V            | T = 0°C to +125°C           | TO 220                       | 50 Units /Rail        |
| MC7818ACTG    |                 |                             | TO 220 (Pb-free)             | 50 Units /Rail        |
| MC7818BT      |                 | T = -40°C to +125°C         | TO 220                       | 50 Units /Rail        |
| MC7818BTG     |                 |                             | TO 220 (Pb-free)             | 50 Units /Rail        |
| MC7818CD2T    |                 | T = 0°C to +125°C           | D <sup>2</sup> PAK           | 50 Units /Rail        |
| MC7818CD2TR4  |                 |                             | D <sup>2</sup> PAK           | 800 / Tape & Reel     |
| MC7818CD2TR4G |                 |                             | D <sup>2</sup> PAK (Pb-free) | 800 / Tape & Reel     |
| MC7818CT      |                 |                             | TO 220                       | 50 Units /Rail        |
| MC7818CTG     |                 |                             | TO 220 (Pb-free)             | 50 Units /Rail        |

<sup>†</sup>For information on tape and reel specifications, including part orientation and tape sizes, please refer to our Tape and Reel Packaging Specifications Brochure, BRD8011/D.

\*NCV devices: T<sub>low</sub> = -40°C, T<sub>high</sub> = +125°C. Guaranteed by design. NCV prefix is for automotive and other applications requiring site and change control.

## ORDERING INFORMATION

| Device        | Nominal Voltage | Operating Temperature Range | Package                      | Shipping <sup>†</sup> |
|---------------|-----------------|-----------------------------|------------------------------|-----------------------|
| MC7824ACT     | 24 V            | T = 0°C to +125°C           | TO 220                       | 50 Units /Rail        |
| MC7824ACTG    |                 |                             | TO 220 (Pb-free)             | 50 Units /Rail        |
| MC7824BD2T    |                 | T = -40°C to +125°C         | D <sup>2</sup> PAK           | 50 Units /Rail        |
| MC7824BD2TG   |                 |                             | D <sup>2</sup> PAK (Pb-free) | 50 Units /Rail        |
| MC7824BD2TR4  |                 |                             | D <sup>2</sup> PAK           | 800 / Tape & Reel     |
| MC7824BD2TR4G |                 |                             | D <sup>2</sup> PAK (Pb-free) | 800 / Tape & Reel     |
| MC7824BT      |                 |                             | TO 220                       | 50 Units /Rail        |
| MC7824BTG     |                 |                             | TO 220 (Pb-free)             | 50 Units /Rail        |
| MC7824CD2T    |                 | T = 0°C to +125°C           | D <sup>2</sup> PAK           | 50 Units /Rail        |
| MC7824CD2TG   |                 |                             | D <sup>2</sup> PAK (Pb-free) | 50 Units /Rail        |
| MC7824CD2TR4  |                 |                             | D <sup>2</sup> PAK           | 800 / Tape & Reel     |
| MC7824CD2TR4G |                 |                             | D <sup>2</sup> PAK (Pb-free) | 800 / Tape & Reel     |
| MC7824CT      |                 |                             | TO 220                       | 50 Units /Rail        |
| MC7824CTG     |                 |                             | TO 220 (Pb-free)             | 50 Units /Rail        |


<sup>†</sup>For information on tape and reel specifications, including part orientation and tape sizes, please refer to our Tape and Reel Packaging Specifications Brochure, BRD8011/D.

\*NCV devices: T<sub>low</sub> = -40°C, T<sub>high</sub> = +125°C. Guaranteed by design. NCV prefix is for automotive and other applications requiring site and change control.


## MARKING DIAGRAMS



TO-220-3  
T SUFFIX  
CASE 221A




\*



D<sup>2</sup>PAK-3  
D2T SUFFIX  
CASE 936



\*



DPAK-3  
DT SUFFIX  
CASE 369C


\*This marking diagram also applies to NCV78xx family.

xx = 05, 06, 08, 09, 12, 15, 18, or 24  
 y = B or C  
 A = Assembly Location  
 WL, L = Wafer Lot  
 Y = Year  
 WW = Work Week

# MC7800, MC7800A, NCV7805

## PACKAGE DIMENSIONS

TO-220-3  
T SUFFIX  
CASE 221A-09  
ISSUE AA

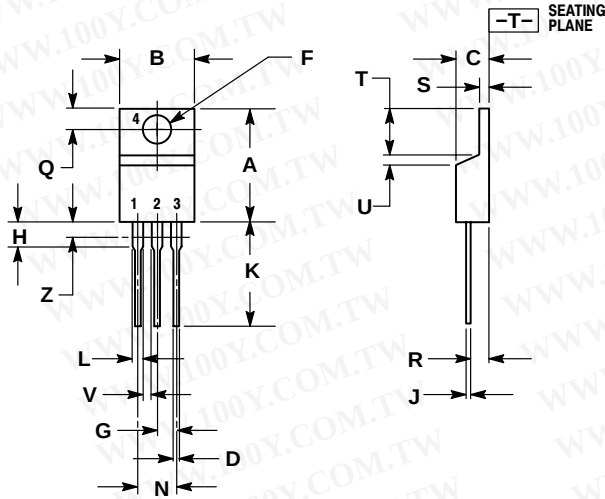

### NOTES:

1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
2. CONTROLLING DIMENSION: INCH.
3. DIMENSION Z DEFINES A ZONE WHERE ALL BODY AND LEAD IRREGULARITIES ARE ALLOWED.


| DIM | INCHES |       | MILLIMETERS |       |
|-----|--------|-------|-------------|-------|
|     | MIN    | MAX   | MIN         | MAX   |
| A   | 0.570  | 0.620 | 14.48       | 15.75 |
| B   | 0.380  | 0.405 | 9.66        | 10.28 |
| C   | 0.160  | 0.190 | 4.07        | 4.82  |
| D   | 0.025  | 0.035 | 0.64        | 0.88  |
| F   | 0.142  | 0.147 | 3.61        | 3.73  |
| G   | 0.095  | 0.105 | 2.42        | 2.66  |
| H   | 0.110  | 0.155 | 2.80        | 3.93  |
| J   | 0.018  | 0.025 | 0.46        | 0.64  |
| K   | 0.500  | 0.562 | 12.70       | 14.27 |
| L   | 0.045  | 0.060 | 1.15        | 1.52  |
| N   | 0.190  | 0.210 | 4.83        | 5.33  |
| Q   | 0.100  | 0.120 | 2.54        | 3.04  |
| R   | 0.080  | 0.110 | 2.04        | 2.79  |
| S   | 0.045  | 0.055 | 1.15        | 1.39  |
| T   | 0.235  | 0.255 | 5.97        | 6.47  |
| U   | 0.000  | 0.050 | 0.00        | 1.27  |
| V   | 0.045  | ---   | 1.15        | ---   |
| Z   | ---    | 0.080 | ---         | 2.04  |

勝特力材料 886-3-5753170  
勝特力电子(上海) 86-21-54151736  
勝特力电子(深圳) 86-755-83298787  
[Http://www.100y.com.tw](http://www.100y.com.tw)

# MC7800, MC7800A, NCV7805

## PACKAGE DIMENSIONS

D<sup>2</sup>PAK-3  
D2T SUFFIX  
CASE 936-03  
ISSUE B

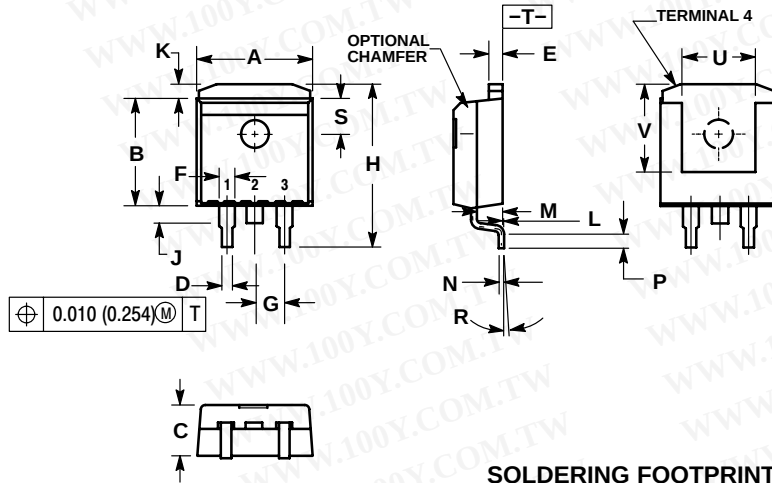


### NOTES:

1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
2. CONTROLLING DIMENSION: INCH.
3. TAB CONTOUR OPTIONAL WITHIN DIMENSIONS A AND K.
4. DIMENSIONS U AND V ESTABLISH A MINIMUM MOUNTING SURFACE FOR TERMINAL 4.
5. DIMENSIONS A AND B DO NOT INCLUDE MOLD FLASH OR GATE PROTRUSIONS. MOLD FLASH AND GATE PROTRUSIONS NOT TO EXCEED 0.025 (0.635) MAXIMUM.

| DIM | INCHES    |       | MILLIMETERS |        |
|-----|-----------|-------|-------------|--------|
|     | MIN       | MAX   | MIN         | MAX    |
| A   | 0.386     | 0.403 | 9.804       | 10.236 |
| B   | 0.356     | 0.368 | 9.042       | 9.347  |
| C   | 0.170     | 0.180 | 4.318       | 4.572  |
| D   | 0.026     | 0.036 | 0.660       | 0.914  |
| E   | 0.045     | 0.055 | 1.143       | 1.397  |
| F   | 0.051 REF |       | 1.295 REF   |        |
| G   | 0.100 BSC |       | 2.540 BSC   |        |
| H   | 0.539     | 0.579 | 13.691      | 14.707 |
| J   | 0.125 MAX |       | 3.175 MAX   |        |
| K   | 0.050 REF |       | 1.270 REF   |        |
| L   | 0.000     | 0.010 | 0.000       | 0.254  |
| M   | 0.088     | 0.102 | 2.235       | 2.591  |
| N   | 0.018     | 0.026 | 0.457       | 0.660  |
| P   | 0.058     | 0.078 | 1.473       | 1.981  |
| R   | 5° REF    |       | 5° REF      |        |
| S   | 0.116 REF |       | 2.946 REF   |        |
| U   | 0.200 MIN |       | 5.080 MIN   |        |
| V   | 0.250 MIN |       | 6.350 MIN   |        |

### SOLDERING FOOTPRINT\*

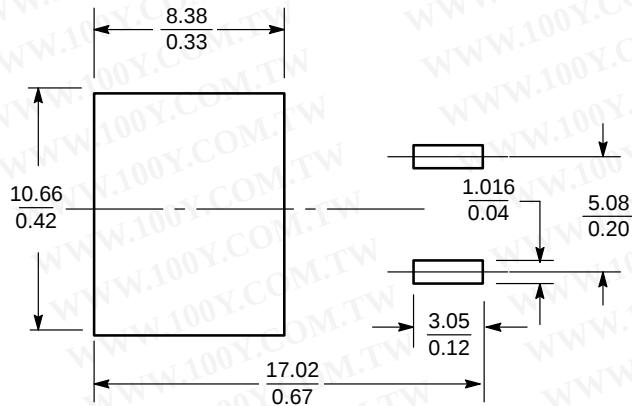

D<sup>2</sup>PAK-3

SCALE 3:1 (mm/inches)


勝特力材料 886-3-5753170  
勝特力电子(上海) 86-21-54151736  
勝特力电子(深圳) 86-755-83298787  
[Http://www.100y.com.tw](http://www.100y.com.tw)

\*For additional information on our Pb-Free strategy and soldering details, please download the ON Semiconductor Soldering and Mounting Techniques Reference Manual, SOLDERRM/D.

# MC7800, MC7800A, NCV7805

## PACKAGE DIMENSIONS


DPAK-3  
DT SUFFIX  
CASE 369C-01  
ISSUE O

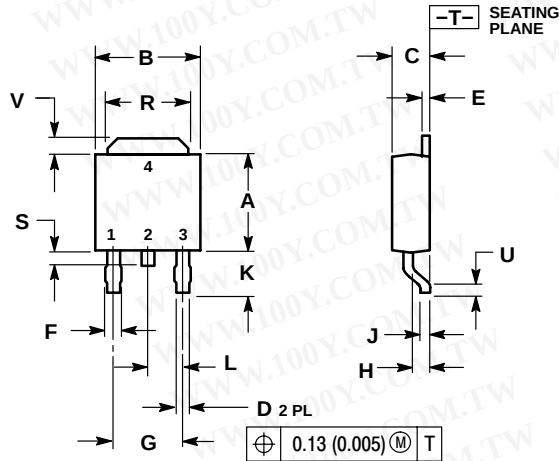

- NOTES:  
1. DIMENSIONING AND TOLERANCING  
PER ANSI Y14.5M, 1982.  
2. CONTROLLING DIMENSION: INCH.

| DIM | INCHES    |       | MILLIMETERS |      |
|-----|-----------|-------|-------------|------|
|     | MIN       | MAX   | MIN         | MAX  |
| A   | 0.235     | 0.245 | 5.97        | 6.22 |
| B   | 0.250     | 0.265 | 6.35        | 6.73 |
| C   | 0.086     | 0.094 | 2.19        | 2.38 |
| D   | 0.027     | 0.035 | 0.69        | 0.88 |
| E   | 0.018     | 0.023 | 0.46        | 0.58 |
| F   | 0.037     | 0.045 | 0.94        | 1.14 |
| G   | 0.180 BSC |       | 4.58 BSC    |      |
| H   | 0.034     | 0.040 | 0.87        | 1.01 |
| J   | 0.018     | 0.023 | 0.46        | 0.58 |
| K   | 0.102     | 0.114 | 2.60        | 2.89 |
| L   | 0.090 BSC |       | 2.29 BSC    |      |
| R   | 0.180     | 0.215 | 4.57        | 5.45 |
| S   | 0.025     | 0.040 | 0.63        | 1.01 |
| U   | 0.020     | ---   | 0.51        | ---  |
| V   | 0.035     | 0.050 | 0.89        | 1.27 |
| Z   | 0.155     | ---   | 3.93        | ---  |

## SOLDERING FOOTPRINT\*

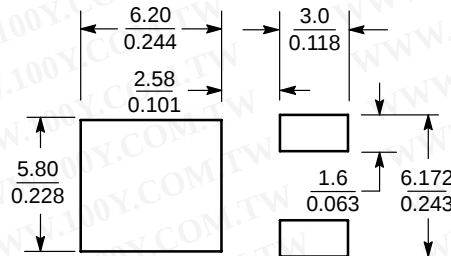

SCALE 3:1 (mm inches)

\*For additional information on our Pb-Free strategy and soldering details, please download the ON Semiconductor Soldering and Mounting Techniques Reference Manual, SOLDERRM/D.

勝特力材料 886-3-5753170  
勝特力电子(上海) 86-21-54151736  
勝特力电子(深圳) 86-755-83298787  
[Http://www.100y.com.tw](http://www.100y.com.tw)