


Electrical:



Electrical: cULus VDE
Voltage rating: 300V 125V
Current rating: 15A 15A
Wire range:
Solid wire(AWG)
Stranded wire(AWG):
Withstanding Voltage: 4KV
Operating temperature: -30 ℃ to +105 ℃
Soldering temperature: 245 ℃ ±10 ℃/5Sec.

Materials

Material:
Contact pin: Brass with Tin plated
Insulator (housing): Thermoplastic(UL94V-0)

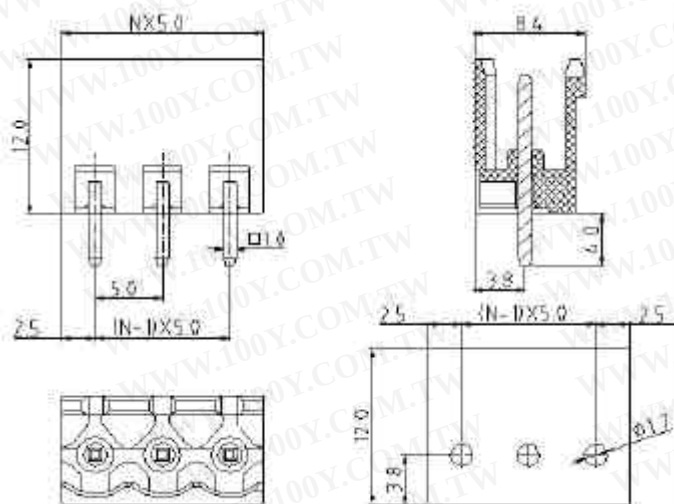

勝特力材料 886-3-5753170
勝特力電子(上海) 86-21-54151736
勝特力電子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

How to Order

00

XX

X

X

X

O

Solid Block 02

2contacts 03

3contacts 24

24contacts

7 5.0/.197" 8

10.0/.394"

0 open 1 close 5
With flange

0 Black 5 Green 6
Blue 8 Grey

0 Vertical 1 Right angle

Customer
Request