

P125系列


最小测试间距3.18mm

探针



单位: mm

针套

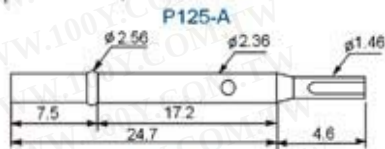

P125-A

R125-S



P125-B



P125-T



P125-E



P125-D



P125-H



P125-Q


P125-1Q Ø2.0

针杆: 磷铜镀镍
针管: 黄铜管镀金
弹簧: 琴钢线
钻孔尺寸: 2.4mm
接触弹力: 180g(280g)
额定电流: 5A

P156系列

最小测试间距3.96mm


探针



单位: mm

P156-A

针套

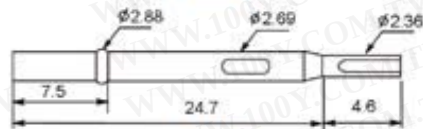


R156-S



P156-B



P156-D



P156-H



P156-Q

针杆: 磷铜镀镍
针管: 黄铜管镀金
弹簧: 琴钢线
钻孔尺寸: 2.75mm
接触弹力: 250g(380g)
额定电流: 5A

胜特力材料 886-3-5753170
胜特力电子(上海) 86-21-54151736
胜特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

注: 规格变动不另行通知