


# Alarm Fuses

## P4H Fuse

Normal blow

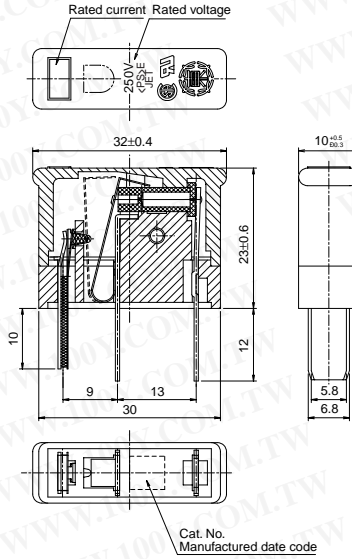

Cat. No.	Rated Current	Breaking Capacity	Typ. Resistance*1
P404H	0.4A	AC 125V 10,000A  AC/DC 250V 1,500A	2.2Ω
P405H	0.5A		1.6Ω
P413H	1.3A		0.52Ω
P420H	2A		78mΩ
P430H	3A		51mΩ
P435H	3.5A		42mΩ
P450H	5A		30mΩ
P475H	7.5A		13mΩ
P4100H	10A		10mΩ

- Physical Size / Net Weight  
32 × 10 × 35mm 9.5g
- Color  
Black
- Package  
100Pcs/Box
- Applicable Fuseholders  
Type P4 Fuseholders



Carrying Capacity	Clearing Time
110%	135% within 1 hour 200% within 2 minutes

\*1 : at 10% max. of rated current  
\*2 : Alarm contact capacity  
200VA max. 5A

勝特力材料 886-3-5753170  
 勝特力电子(上海) 86-21-54151736  
 勝特力电子(深圳) 86-755-83298787  
[Http://www.100y.com.tw](http://www.100y.com.tw)

### Clearing Characteristics

### I<sup>2</sup>t Characteristics

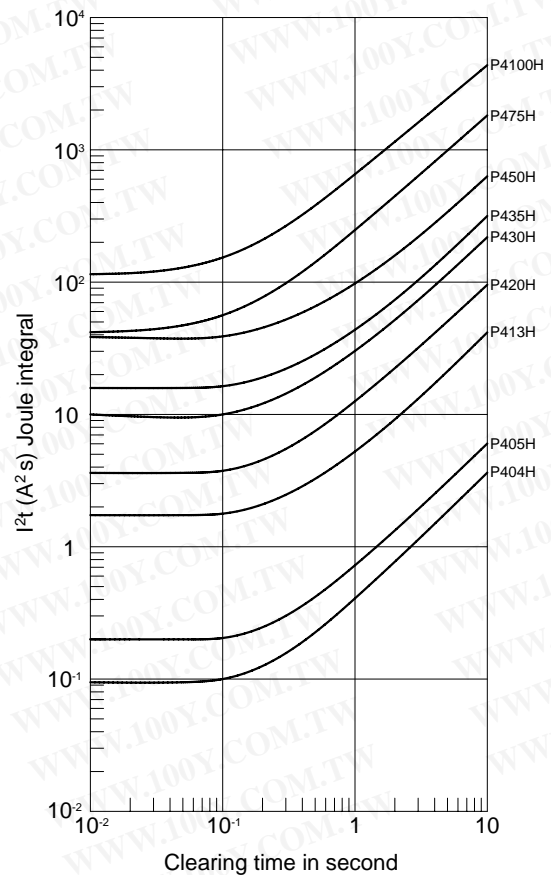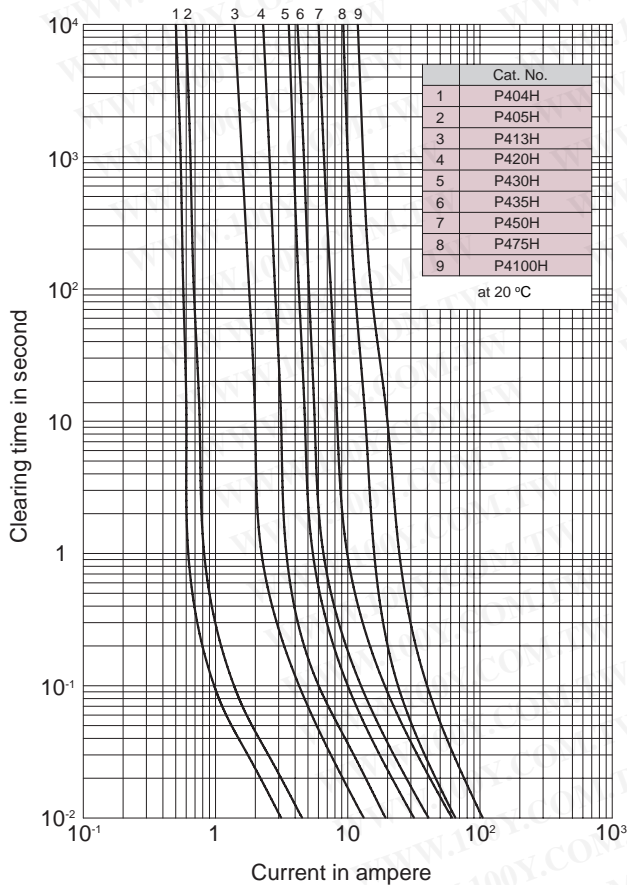

Information in this catalog may be subject to change without notice. Please confirm product information when ordering.