


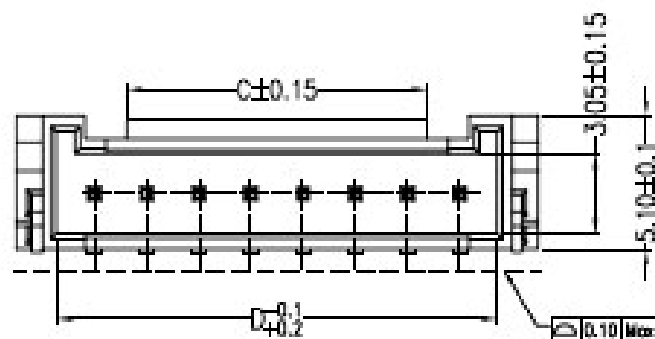
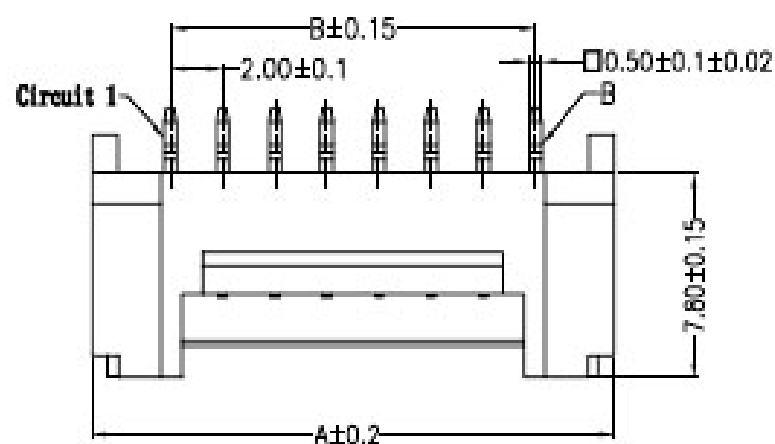


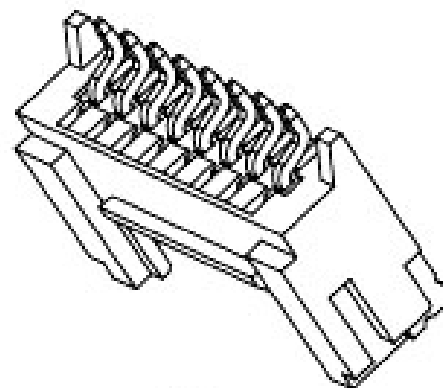

Circuits	Dimensions(mm)				Circuits	Dimensions(mm)			
	A	B	C	D		A	B	C	D
02	8.00	2.00	2.30	4.90	10	24.00	18.00	15.30	20.90
03	10.00	4.00	2.30	8.90	11	26.00	20.00	15.30	22.90
04	12.00	6.00	3.30	8.90	12	28.00	22.00	15.30	24.90
05	14.00	8.00	3.30	10.90	13	30.00	24.00	15.30	26.90
06	16.00	10.00	7.30	12.90	14	32.00	26.00	15.30	28.90
07	18.00	12.00	9.30	14.90	15	34.00	28.00	15.30	30.90
08	20.00	14.00	11.30	16.90	16	36.00	30.00	15.30	32.90
09	22.00	16.00	13.30	18.90					

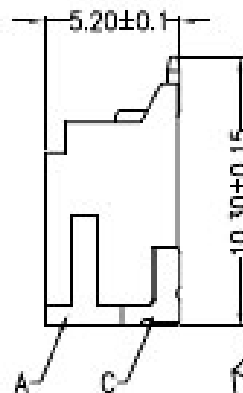

Assembly Layout

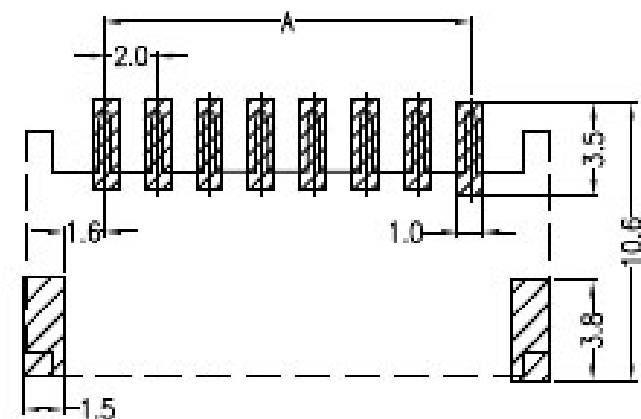

SUGGESTED PCB LAYOUT

主要技术参数 Main Specifications

- 线 数 (Poles): 02 to 16
- 接触电阻 (Contact resistance): $\leq 20 \text{ m}\Omega$
- 绝缘电阻 (Insulation resistance): $\geq 1000 \text{ M}\Omega$
- 额定电压 (Rated voltage): 250V AC DC
- 额定电流 (Rated current): 2.0A AC DC
- 耐 电 压 (Withstand Voltage): 1000V AC/minute
- 温度范围 (Temperature Range): $-25^\circ\text{C} \sim +106^\circ\text{C}$

勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-34970699
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)