


□ PLS-28 結構圖

勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-54151736
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

PLS-28-AD(F)M




PLS-28-AD(F)M

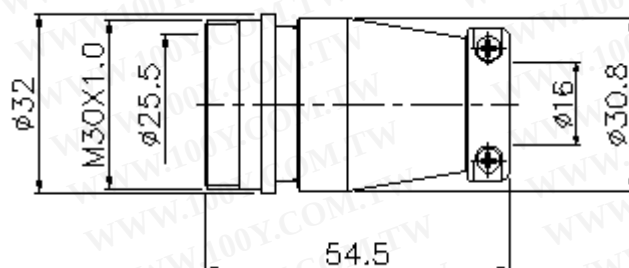

PLS-28-ADF




PLS-28-ADF

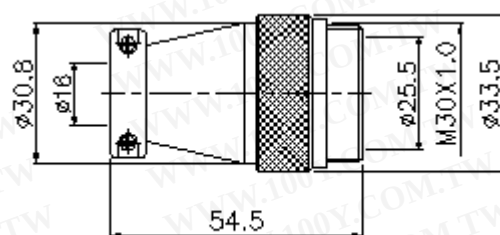

PLS-28-ADM




PLS-28-ADM

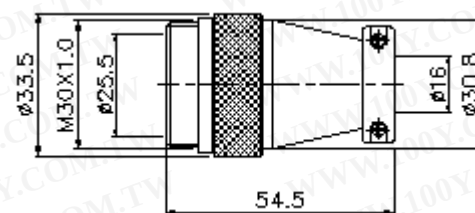


PLS-28-GPF




PLS-28-GPF

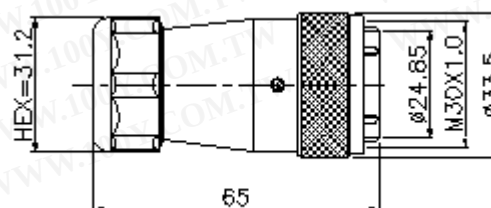


PLS-28-GPM

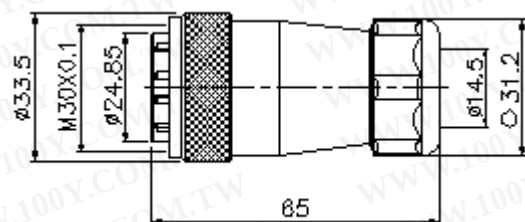


PLS-28-PF

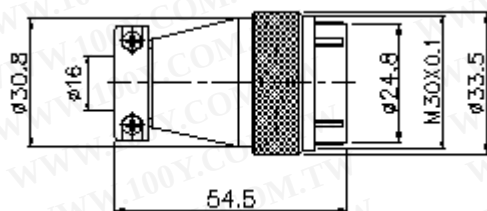

PLS-28-PM

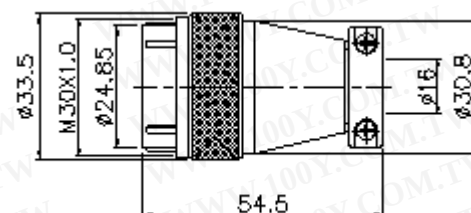


PLS-28-RF

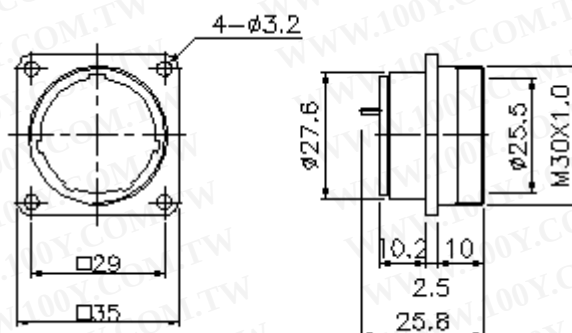


勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-54151736
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

PLS-28-RM

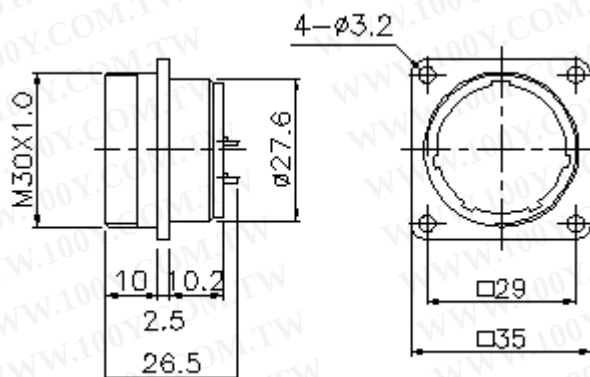

PLS-28-RCa

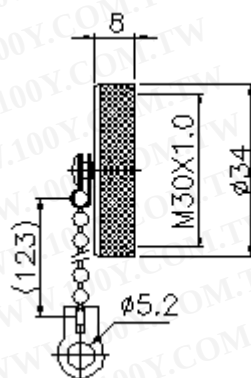

No. of contacts

Contacts
Cofiguration

Rated current/voltage

Operation limit voltage (AC.V.rms)

Withstanding voltage (AC.V.rms) 1
minute

Insulation resistance (M Ω MIN.) at
DC 500V

Contact resistance (M Ω MAX.) AT
DC 1A

Pin diameter (ϕ mm)

	7	12	16	17	20	26
Rated current/voltage	15A 250V	10A 250V	5A 250V	5A 250V	5A 250V	5A 250V
Operation limit voltage (AC.V.rms)	300	250	250	250	250	250
Withstanding voltage (AC.V.rms) 1 minute	1800	1000	1000	1000	1000	1000
Insulation resistance (M Ω MIN.) at DC 500V	1800	1000	1000	1000	1000	1000
Contact resistance (M Ω MAX.) AT DC 1A	3	5	5	5	3	3
Pin diameter (ϕ mm)	2	1.6	1.6	1.6	1.2	1.2

勝特力材料 886-3-5753170
勝特力电子(上海) 86-21-54151736
勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)