

PPT

勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-54151736
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)


10Base-T Single Port Magnetics

Fully Integrated for Adapter, Hub, and Motherboard Applications
 ♦ Desinged to Meet or Exceed IEEE802.3i-1993 Specifications

Electrical specifications@25°C-operating temperature: 0°C to 70°C

Part Number	Insertion LOSS (dB MAX)	Attenuation (XMIT) (dB Min)	Return Loss 0.1 to 10MHz (dB MIN)	Crosstalk (dB MIN)	Common Mode Rejection (XMIT) (dB MIN)	Hipot (Vrms)
	10MHz	30MHz 70MHz	100 Ω	5MHz:10MHz:30MHz:50MHz:100MHz	5MHz:10MHz 50MHz 100MHz 200MHz	
PM34-1006M	-1.0	-32 -35	-15	-50 -45 -35 -30 -35	-50 -45 -30 -25 -20	2000
PM34-1006F	-1.0	-32 -35	-15	-50 -45 -35 -30 -35	-60 -60 -55 -50 -45	2000

Mechanical(unit:inch/mm)

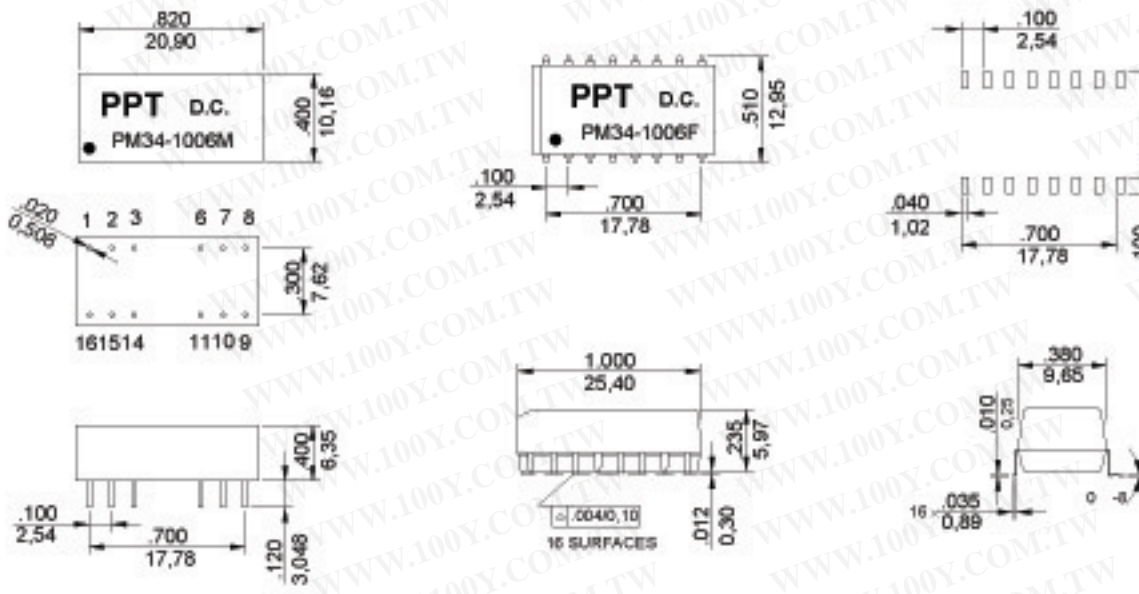

Schematic

