


PROMOVER PRODUCTS


Shape

HS-66XX

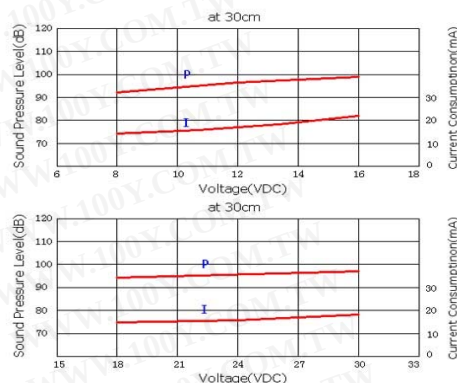

Model Number	HS-66XX						
Rated Voltage(VDC)	1.5	3	4.5	6	9	12	24
Operating Voltage(VDC)	1.2 ~ 2	2 ~ 4	3 ~ 6	4 ~ 8	6 ~ 12	8 ~ 16	20 ~ 28
Current Consumption Max(mA)	25	40	30	38	20	28	30
SPL Min. (dB) at 30cm	78	85	85	85	88	88	90
Resonant Frequency(Hz)	400±100						
Operating Temperature(°C)	-20~+60						
Storage Temperature(°C)	-20~+70						
Tone	Continuous Sound						
Material	ABS						

Dimension

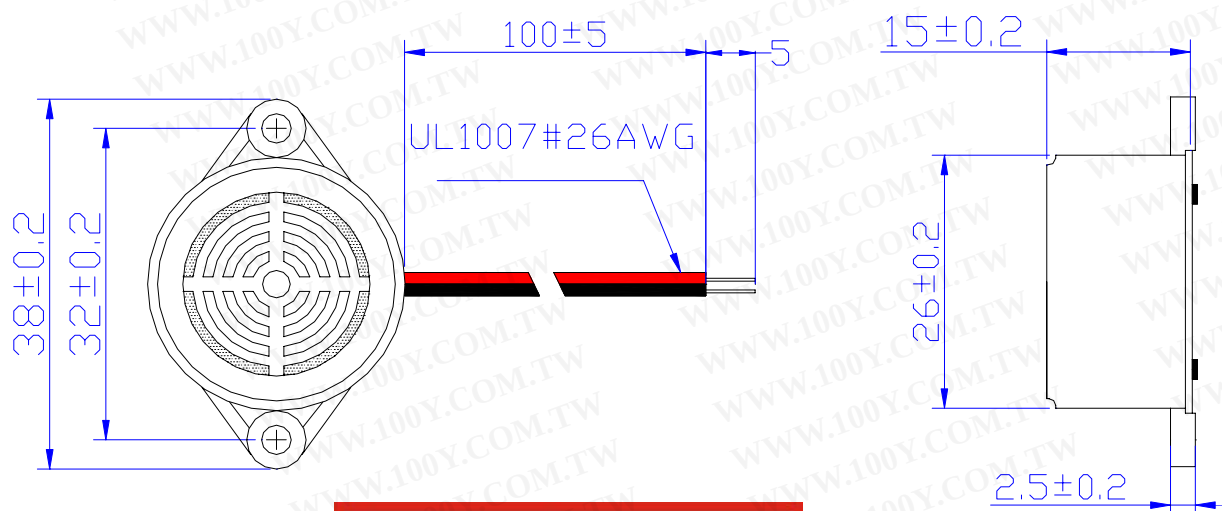

勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-54151736
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

Tolerance: ±0.5 Unit:mm