


Pin Terminals

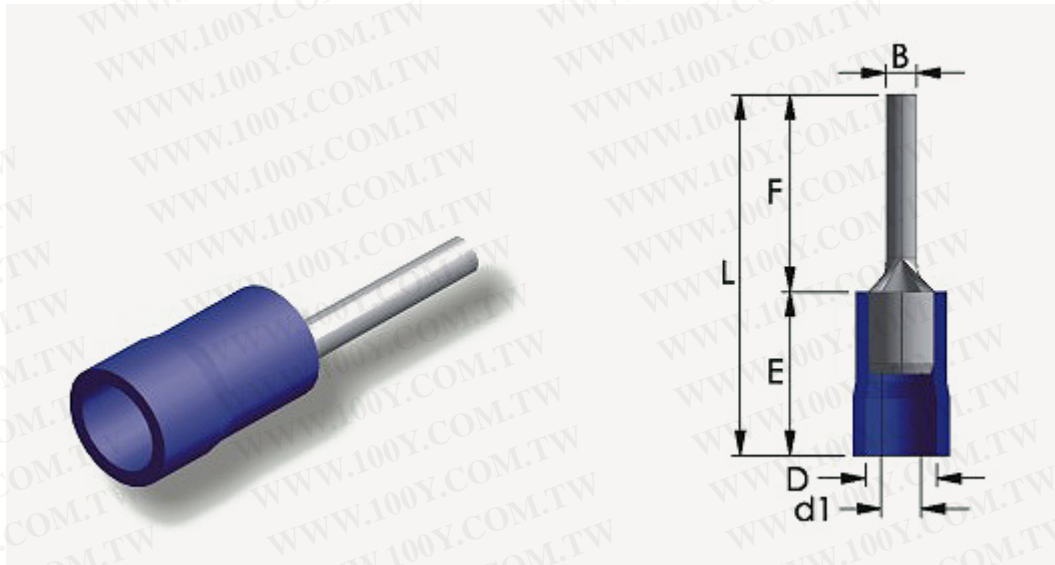

PVC INSULATED PIN TERMINALS

Feature:

1. MAXIMUM ELECTRICAL RATING: 600 VOLTS
2. MAXIMUM TEMPERATURE: 75 °C
3. TERMINAL MATERIAL: COPPER
4. PLATING: ELECTRO TIN PLATED
5. INSULATION MATERIAL: VINYL (PVC)

Specification:

WIRE RANGE AWG / mm ²	ITEM NO.	DIMENSIONS inch (mm)					
		B	L	F	E	D	d1
22~16 AWG 0.5~1.5 mm ²	PT1-9V	.075 (1.9)	.768 (19.5)	.374 (9.5)	.394 (10.0)	.161 (4.1)	.067 (1.7)
	PT1-10V		.807 (20.5)	.413 (10.5)			
	PT1-12V		.886 (22.5)	.492 (12.5)			
	PT1-13V		.925 (23.5)	.531 (13.5)			
	PT1-18V		1.122 (28.5)	.728 (18.5)			
16~14 AWG 1.5~2.5 mm ²	PT2-9V	.075 (1.9)	.768 (19.5)	.374 (9.5)	.394 (10.0)	.177 (4.5)	.091 (2.3)
	PT2-10V		.807 (20.5)	.413 (10.5)			
	PT2-12V		.886 (22.5)	.492 (12.5)			
	PT2-13V		.925 (23.5)	.531 (13.5)			
	PT2-18V		1.122 (28.5)	.728 (18.5)			
12~10 AWG 4~6 mm ²	PT5-13V	.110 (2.8)	1.031 (26.2)	.539 (13.7)	.492 (12.5)	.256 (6.5)	.134 (3.4)

勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-54151736
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)