



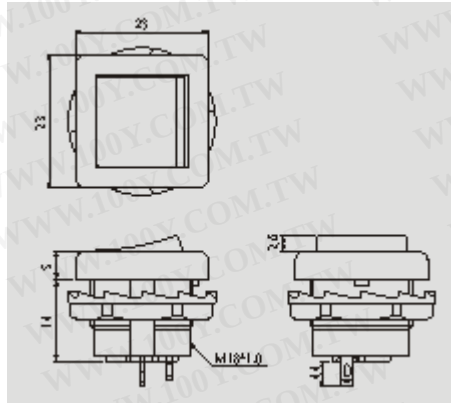

FEATURES

- MATERIAL: Actuators are nylon (UL flame: 94V-2). Terminals are silver plated brass.
- Phenolic base.


R13-136

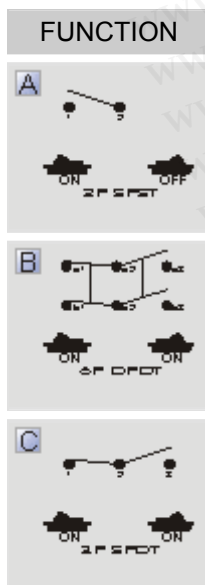

Dielectric strength

AC 1500V 1 minute

Cut-out

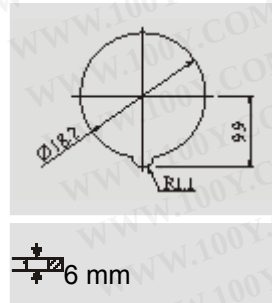

Rating

10A 125V AC

6A 250V AC

Contact resistance

50mΩ Max

Insulation resistance

DC 500V 100MΩ Min

勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-54151736
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)