


R13-402

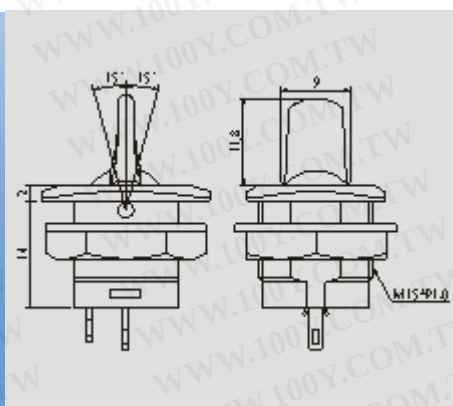

FEATURES

- MATERIAL: Frames are nylon (UL flame: 94V-2). Terminals are silver plated brass.

Rating

6A 125V AC
3A 250V AC

Contact

resistance

50mΩ Max

Insulation
resistance

DC 500V

100MΩ Min

Dielectric
strength

AC 1500V 1
minute

Cut-out

R13-402


FUNCTION

TERMINAL



0 5 10 Soder

* () =momentary



6 mm max

勝特力材料 886-3-5753170
勝特力电子(上海) 86-21-54151736
勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)