

## 15A, 400V - 600V Hyperfast Diodes

The RHRP1540 and RHRP1560 are hyperfast diodes with soft recovery characteristics ( $t_{rr} < 35\text{ns}$ ). They have half the recovery time of ultrafast diodes and are silicon nitride passivated ion-implanted epitaxial planar construction.

These devices are intended for use as freewheeling/clamping diodes and rectifiers in a variety of switching power supplies and other power switching applications. Their low stored charge and hyperfast soft recovery minimize ringing and electrical noise in many power switching circuits reducing power loss in the switching transistors.

Formerly developmental type TA49061.

## Ordering Information

| PART NUMBER | PACKAGE  | BRAND    |
|-------------|----------|----------|
| RHRP1540    | TO-220AC | RHRP1540 |
| RHRP1560    | TO-220AC | RHRP1560 |

NOTE: When ordering, use the entire part number.

## Symbol

K  
—  
▲  
—  
A

勝特力材料 886-3-5753170  
 勝特力电子(上海) 86-21-54151736  
 勝特力电子(深圳) 86-755-83298787  
[Http://www.100y.com.tw](http://www.100y.com.tw)


## Features

- Hyperfast with Soft Recovery . . . . . <35ns
- Operating Temperature . . . . . 175°C
- Reverse Voltage Up To . . . . . 600V
- Avalanche Energy Rated
- Planar Construction

## Applications

- Switching Power Supplies
- Power Switching Circuits
- General Purpose

## Packaging

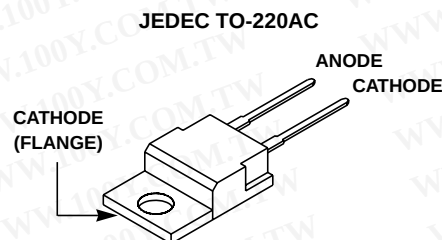

## Absolute Maximum Ratings $T_C = 25^\circ\text{C}$ , Unless Otherwise Specified

|                                                                                          | RHRP1540   | RHRP1560   | UNITS |
|------------------------------------------------------------------------------------------|------------|------------|-------|
| Peak Repetitive Reverse Voltage . . . . . $V_{RRM}$                                      | 400        | 600        | V     |
| Working Peak Reverse Voltage . . . . . $V_{RWM}$                                         | 400        | 600        | V     |
| DC Blocking Voltage . . . . . $V_R$                                                      | 400        | 600        | V     |
| Average Rectified Forward Current . . . . . $I_{F(AV)}$<br>( $T_C = 140^\circ\text{C}$ ) | 15         | 15         | A     |
| Repetitive Peak Surge Current . . . . . $I_{FRM}$<br>(Square Wave, 20kHz)                | 30         | 30         | A     |
| Nonrepetitive Peak Surge Current . . . . . $I_{FSM}$<br>(Halfwave, 1 Phase, 60Hz)        | 200        | 200        | A     |
| Maximum Power Dissipation . . . . . $P_D$                                                | 100        | 100        | W     |
| Avalanche Energy (See Figures 10 and 11) . . . . . $E_{AVL}$                             | 20         | 20         | mJ    |
| Operating and Storage Temperature . . . . . $T_{STG}, T_J$                               | -65 to 175 | -65 to 175 | °C    |

# RHRP1540, RHRP1560

## Electrical Specifications $T_C = 25^\circ\text{C}$ , Unless Otherwise Specified

| SYMBOL          | TEST CONDITION                                        | RHRP1540 |     |     | RHRP1560 |     |     | UNITS                     |
|-----------------|-------------------------------------------------------|----------|-----|-----|----------|-----|-----|---------------------------|
|                 |                                                       | MIN      | TYP | MAX | MIN      | TYP | MAX |                           |
| $V_F$           | $I_F = 15\text{A}$                                    | -        | -   | 2.1 | -        | -   | 2.1 | V                         |
|                 | $I_F = 15\text{A}, T_C = 150^\circ\text{C}$           | -        | -   | 1.7 | -        | -   | 1.7 | V                         |
| $I_R$           | $V_R = 400\text{V}$                                   | -        | -   | 100 | -        | -   | -   | $\mu\text{A}$             |
|                 | $V_R = 600\text{V}$                                   | -        | -   | -   | -        | -   | 100 | $\mu\text{A}$             |
|                 | $V_R = 400\text{V}, T_C = 150^\circ\text{C}$          | -        | -   | 500 | -        | -   | -   | $\mu\text{A}$             |
|                 | $V_R = 600\text{V}, T_C = 150^\circ\text{C}$          | -        | -   | -   | -        | -   | 500 | $\mu\text{A}$             |
| $t_{rr}$        | $I_F = 1\text{A}, dI_F/dt = 100\text{A}/\mu\text{s}$  | -        | -   | 35  | -        | -   | 35  | ns                        |
|                 | $I_F = 15\text{A}, dI_F/dt = 100\text{A}/\mu\text{s}$ | -        | -   | 40  | -        | -   | 40  | ns                        |
| $t_a$           | $I_F = 15\text{A}, dI_F/dt = 100\text{A}/\mu\text{s}$ | -        | 20  | -   | -        | 20  | -   | ns                        |
| $t_b$           | $I_F = 15\text{A}, dI_F/dt = 100\text{A}/\mu\text{s}$ | -        | 15  | -   | -        | 15  | -   | ns                        |
| $Q_{RR}$        | $I_F = 15\text{A}, dI_F/dt = 100\text{A}/\mu\text{s}$ | -        | 40  | -   | -        | 40  | -   | nC                        |
| $C_J$           | $V_R = 10\text{V}, I_F = 0\text{A}$                   | -        | 60  | -   | -        | 60  | -   | pF                        |
| $R_{\theta JC}$ |                                                       | -        | -   | 1.5 | -        | -   | 1.5 | $^\circ\text{C}/\text{W}$ |

### DEFINITIONS

$V_F$  = Instantaneous forward voltage ( $p_w = 300\mu\text{s}$ ,  $D = 2\%$ ).

$I_R$  = Instantaneous reverse current.

$t_{rr}$  = Reverse recovery time (See Figure 9), summation of  $t_a + t_b$ .

$t_a$  = Time to reach peak reverse current (See Figure 9).

$t_b$  = Time from peak  $I_{RM}$  to projected zero crossing of  $I_{RM}$  based on a straight line from peak  $I_{RM}$  through 25% of  $I_{RM}$  (See Figure 9).

$Q_{RR}$  = Reverse Recovery Charge.

$C_J$  = Junction Capacitance.

$R_{\theta JC}$  = Thermal resistance junction to case.

$p_w$  = Pulse Width.

$D$  = Duty Cycle.

勝特力材料 886-3-5753170  
 勝特力电子(上海) 86-21-54151736  
 勝特力电子(深圳) 86-755-83298787  
[Http://www.100y.com.tw](http://www.100y.com.tw)

## Typical Performance Curves

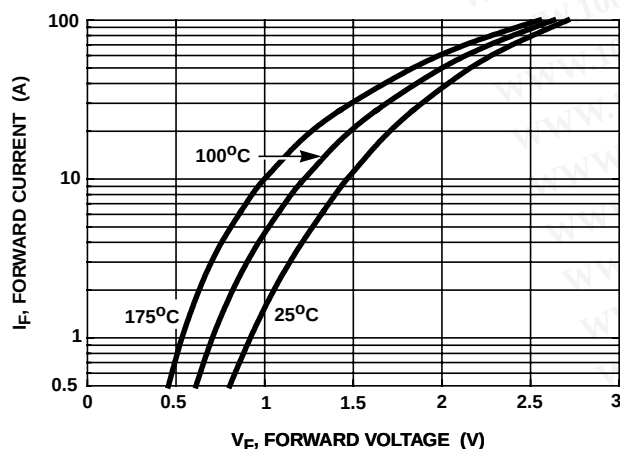


FIGURE 1. FORWARD CURRENT vs FORWARD VOLTAGE

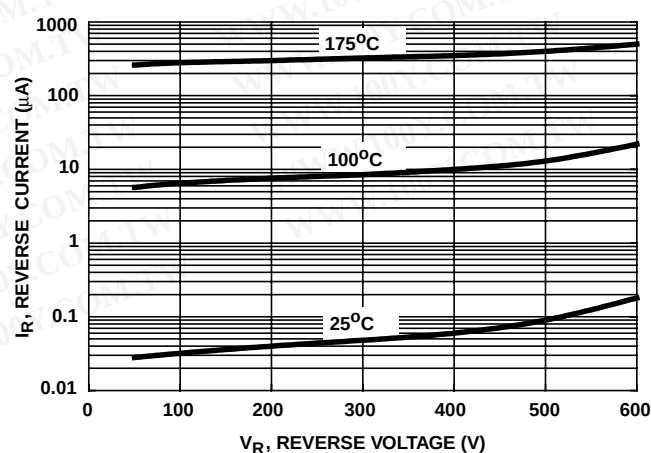


FIGURE 2. REVERSE CURRENT vs REVERSE VOLTAGE

# Typical Performance Curves (Continued)

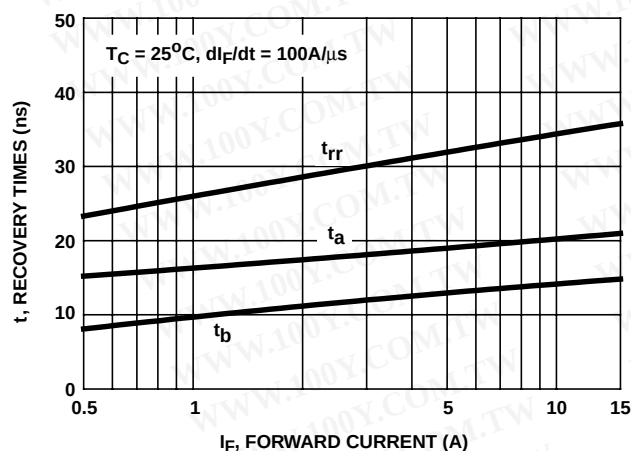


FIGURE 3.  $t_{rr}$ ,  $t_a$  AND  $t_b$  CURVES vs FORWARD CURRENT

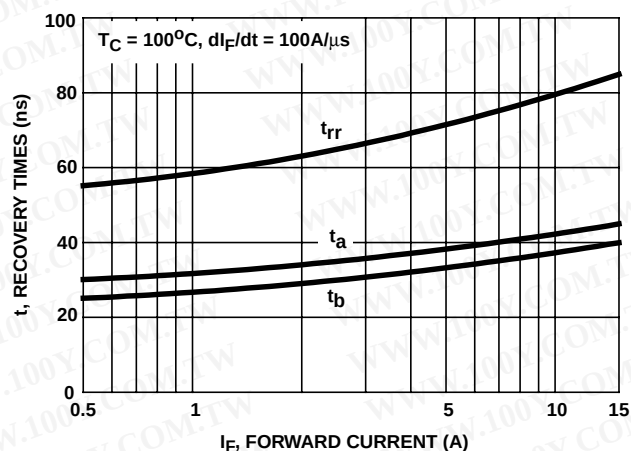


FIGURE 4.  $t_{rr}$ ,  $t_a$  AND  $t_b$  CURVES vs FORWARD CURRENT

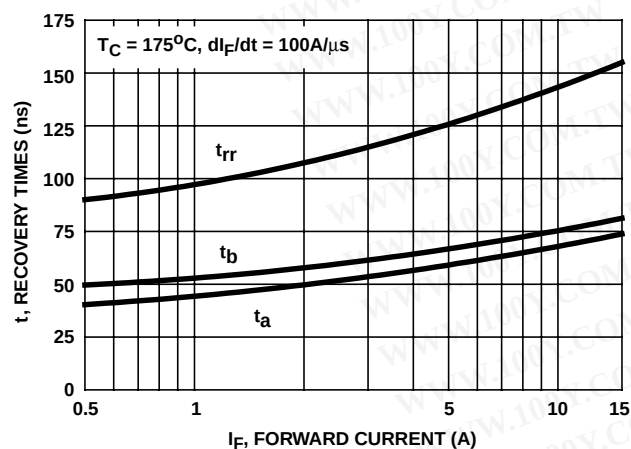


FIGURE 5.  $t_{rr}$ ,  $t_a$  AND  $t_b$  CURVES vs FORWARD CURRENT

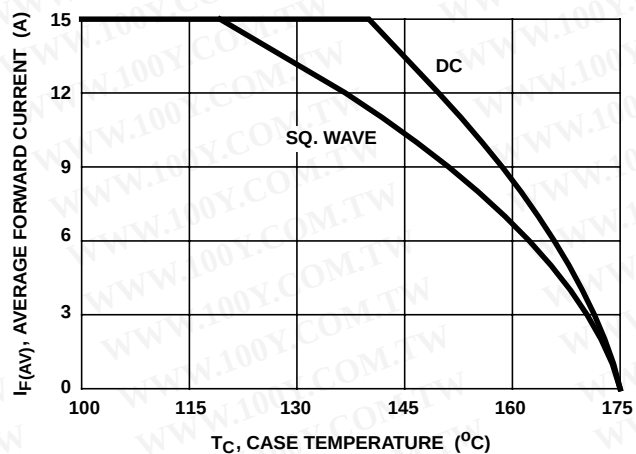


FIGURE 6. CURRENT DERATING CURVE

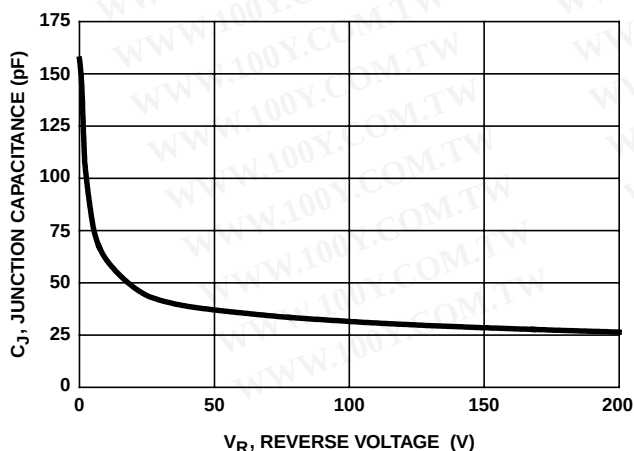
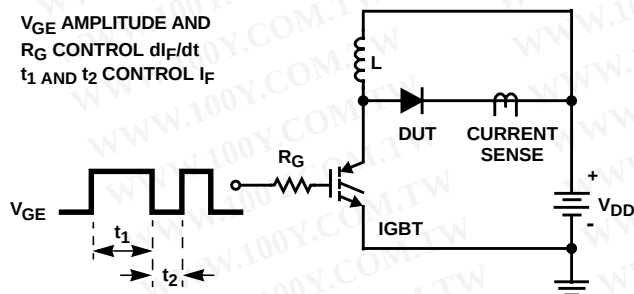
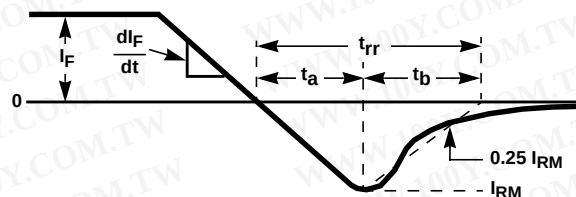


FIGURE 7. JUNCTION CAPACITANCE vs REVERSE VOLTAGE

勝特力材料 886-3-5753170  
 勝特力电子(上海) 86-21-54151736  
 勝特力电子(深圳) 86-755-83298787  
[Http://www.100y.com.tw](http://www.100y.com.tw)

## Test Circuits and Waveforms

FIGURE 8.  $t_{rr}$  TEST CIRCUITFIGURE 9.  $t_{rr}$  WAVEFORMS AND DEFINITIONS

$I_{MAX} = 1A$   
 $L = 40mH$   
 $R < 0.1\Omega$   
 $E_{AVL} = 1/2LI^2 [V_{R(AVL)}/(V_{R(AVL)} - V_{DD})]$   
 $Q_1 = \text{IGBT (}BV_{CES} > DUT V_{R(AVL)}\text{)}$

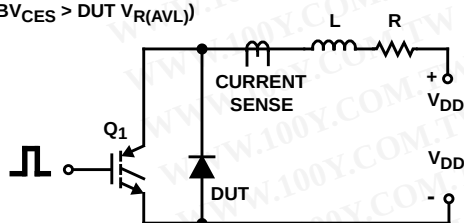


FIGURE 10. AVALANCHE ENERGY TEST CIRCUIT

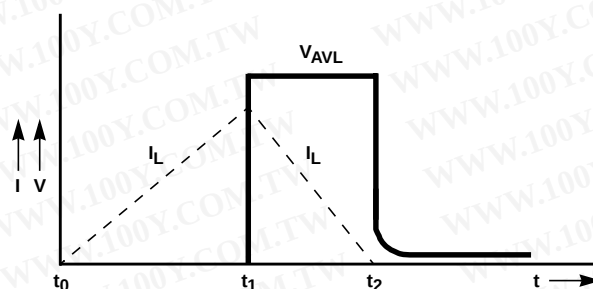


FIGURE 11. AVALANCHE CURRENT AND VOLTAGE WAVEFORMS

勝特力材料 886-3-5753170  
勝特力电子(上海) 86-21-54151736  
勝特力电子(深圳) 86-755-83298787  
[Http://www.100y.com.tw](http://www.100y.com.tw)

All Intersil semiconductor products are manufactured, assembled and tested under **ISO9000** quality systems certification.

Intersil semiconductor products are sold by description only. Intersil Corporation reserves the right to make changes in circuit design and/or specifications at any time without notice. Accordingly, the reader is cautioned to verify that data sheets are current before placing orders. Information furnished by Intersil is believed to be accurate and reliable. However, no responsibility is assumed by Intersil or its subsidiaries for its use; nor for any infringements of patents or other rights of third parties which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of Intersil or its subsidiaries.

For information regarding Intersil Corporation and its products, see web site **[www.intersil.com](http://www.intersil.com)**