


NON-INSULATED RING TERMINALS

勝特力材料 886-3-5753170
勝特力电子(上海) 86-21-54151736
勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

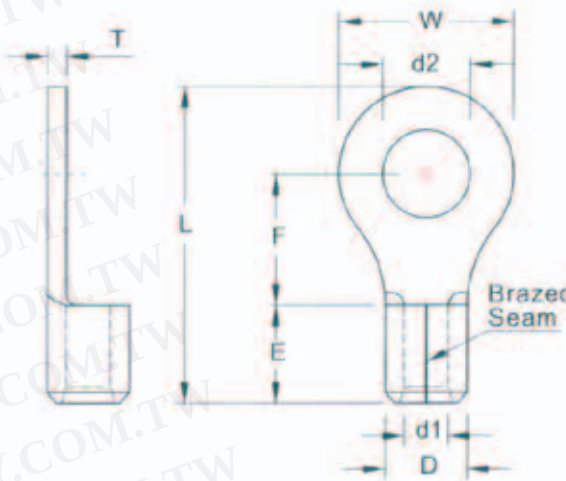

MAXIMUM ELECTRIC CURRENT:


A.W.G.	4	2
AMP.	125	170

TERMINAL MATERIAL: COPPER

WIRE RANGE A.W.G. mm ²	ITEM NO.		STUD SIZE		DIMENSION inch mm							CRIMPING TOOL	Q'TY BOX
	BRAZED SEAM	BUTTED SEAM	d2		W	F	L	E	D	d1	T		
4 A.W.G. 22 mm ²	RNB22-10 *		3/8	.413 10.5	.650 16.5	.531 13.5	1.319 33.5					IZUMI MODEL 9H-60(EP-38) WITH DIE INDEX NO:22 OR K.S. MODEL KH-120 LY-2045E WITH DIE INDEX NO:22 OR 25	250
	RNBL22-10		3/8	.413 10.5	.689 17.5	.630 16.0	1.445 36.7						200
	RNB22-11		7/16	.453 11.5									200
	RNB22-12		1/2	.512 13.0	.866 22.0	.776 19.7	1.673 42.5						200
	RNB22-14		9/16	.591 15.0				.472 12.0	.453 11.5	.303 7.7	.067 1.7		200
	RNB22-16		5/8	.669 17.0									200
	RNB22-18		11/16	.748 19.0	1.181 30.0	.953 24.2	2.008 51.0						200
	RNB22-20		3/4	.827 21.0									200
2 A.W.G. 38 mm ²	RNB38-5		#10	.209 5.3								IZUMI MODEL 9H-60(EP-38) WITH DIE INDEX NO:38 OR K.S. MODEL KH-120 WITH DIE INDEX NO:35	200
	RNBS38-6 *		1/4	.252 6.4	.602 15.3	.685 17.4	1.535 39.0						200
	RNBL38-6		1/4	.252 6.4	.866 22.0	.697 17.7	1.681 42.7						200
	RNBS38-8 *		5/16	.331 8.4	.602 15.3	.685 17.4	1.535 39.0						200
	RNBL38-8		5/16	.331 8.4	.866 22.0	.697 17.7	1.681 42.7						200
	RNBS38-10 *		3/8	.413 10.5	.602 15.3	.685 17.4	1.535 39.0						200
	RNBL38-10		3/8	.413 10.5									200
	RNB38-11		7/16	.453 11.5				.551 14.0	.524 13.3	.370 9.4	.071 1.8		200
	RNB38-12 *		1/2	.512 13.0	.866 22.0	.697 17.7	1.681 42.7						200
	RNB38-13		9/16	.551 14.0									200
	RNB38-14		9/16	.591 15.0									200
	RNB38-16		5/8	.669 17.0									200
	RNB22-18		11/16	.748 19.0	1.181 30.0	.917 23.3	2.047 52.0						200
	RNB38-20		3/4	.827 21.0									200

NON-INSULATED RING TERMINALS

勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-54151736
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

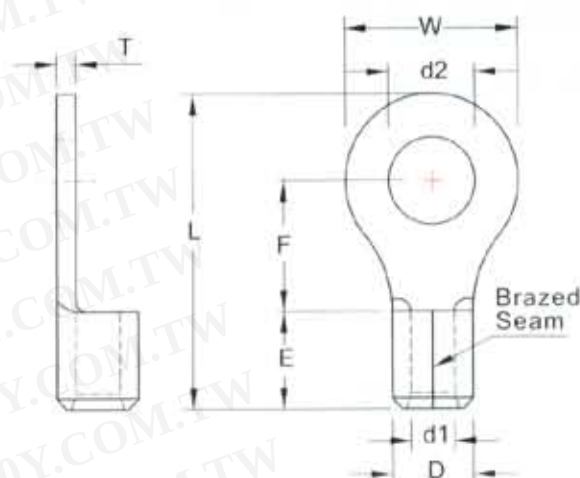

MAXIMUM ELECTRIC CURRENT:

A.W.G.	1/0	2/0
AMP	230	265

TERMINAL MATERIAL: COPPER

WIRE RANGE A.W.G. mm ²	ITEM NO.		STUD SIZE		DIMENSION ^{inch} mm						CRIMPING TOOL	Q'TY BOX	
	BRAZED SEAM	BUTTED SEAM	d2		W	F	L	E	D	d1			T
1/0 A.W.G. 60 mm ²	RNB60-6		1/4	.252 6.4	.866 22.0	.815 20.7	1.957 49.7					IZUMI MODEL 9H-2 9H-150 12#A WITH DIE INDEX NO:60 OR K.S. MODEL KH-120 WITH DIE INDEX NO:50	100
	RNB60-8		5/16	.331 8.4									100
	RNB60-10		3/8	.413 10.5									100
	RNB60-11		7/16	.453 11.5									100
	RNB60-12		1/2	.512 13.0									100
	RNB60-13		9/16	.551 14.0	1.260 32.0	.925 23.5	2.264 57.5				100		
	RNB60-14		9/16	.591 15.0							100		
	RNB60-16		5/8	.669 17.0							100		
	RNB60-18		11/16	.748 19.0							100		
	RNB60-20		3/4	.827 21.0							100		
	RNB60-22		7/8	.906 23.0							100		
2/0 A.W.G. 70 mm ²	RNB70-6		1/4	.252 6.4	.945 24.0	.787 20.0	1.969 50.0					IZUMI MODEL 9H-2 9H-150 12#A WITH DIE INDEX NO:70 OR K.S. MODEL KH-150 WITH DIE INDEX NO:70	100
	RNB70-8		5/16	.331 8.4									100
	RNB70-10		3/8	.413 10.5									100
	RNB70-11		7/16	.453 11.5									100
	RNB70-12		1/2	.512 13.0									100
	RNB70-13		9/16	.551 14.0	1.260 32.0	1.024 26.0	2.402 61.0				100		
	RNB70-14		9/16	.591 15.0							100		
	RNB70-16		5/8	.669 17.0							100		
	RNB70-18		11/16	.748 19.0							100		
	RNB70-20		3/4	.827 21.0							100		
	RNB70-22		7/8	.906 23.0							100		