

# CR1220

3V Lithium Battery  
Swiss Made

勝特力材料 886-3-5753170  
 勝特力电子(上海) 86-21-54151736  
 勝特力电子(深圳) 86-755-83298787  
 Http://www.100y.com.tw


## Technical Data Sheet

### Specifications

Chemical System	Li / MnO <sub>2</sub>
Nominal Voltage	3 V
Rated Capacity	38 mAh
Standard Discharge Current	0,05 mA
Max. Cont. Discharge Current	1,0 mA
Average Weight	0,8 g
Temperature Range	-30 - +70 °C
Self Discharge at 23°C	< 1% / year


### Dimensions

(According to IEC 60086)

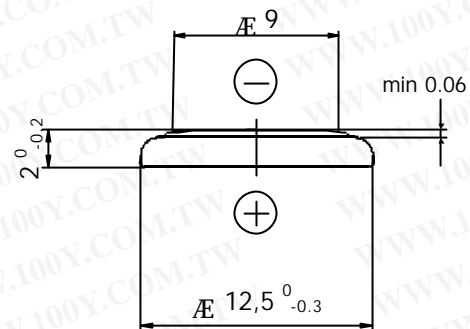


### Performance


Discharge performance at 23°C

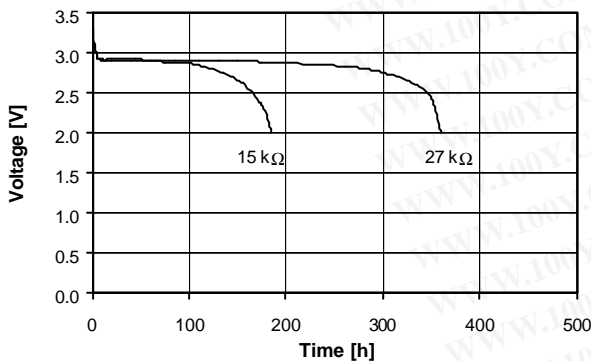


Discharge performance at 23°C

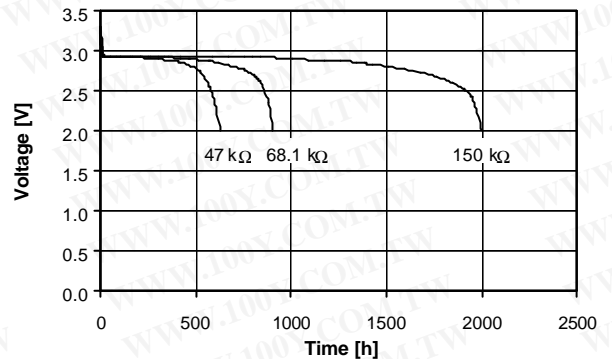

Temperature performance Load 27kΩ

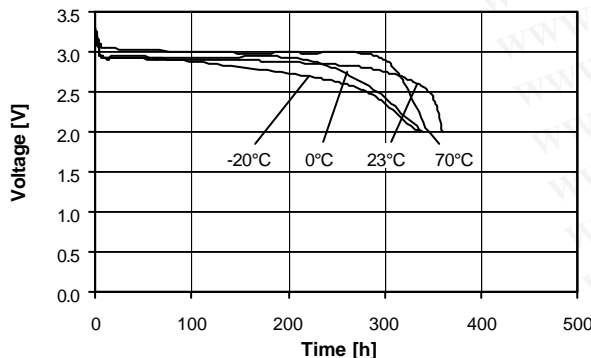

Cell capacity at various loads

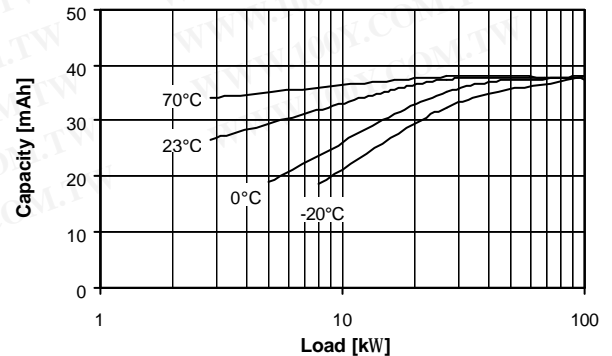

Information and contents in this data sheet are for reference purpose only. They do not constitute any warranty or representation and are subject to change without notice. For most current information and further details, please contact your Renata representative.

Rev. CR1220.04 10/01