

Si photodiode

S9032-02

RGB color sensor



S9032-02 is a color sensor molded into a plastic package having a 3-channel (RGB) photodiode sensitive to the blue ($\lambda_p=460$ nm), green ($\lambda_p=540$ nm) and red ($\lambda_p=620$ nm) regions of the spectrum. S9032-02 has a 3-segment (RGB) circular active area of $\phi 2$ mm.

Features

- 3-channel (R, G, B) Si photodiode
- Surface-mount small plastic package
- Spectral response range close to the human eye sensitivity
- No sensitivity in the near IR region
- Active area: 3-segment (RGB) circular active area of $\phi 2$ mm

Applications

- Color adjustment for LED back light system for LCD
- Color adjustment for LCD projector
- Color tester
- Color detection

勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-54151736
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)


■ Absolute maximum ratings

Parameter	Symbol	Value	Unit
Reverse voltage	V_R Max	10	V
Operating temperature	T_{opr}	-25 to +85	°C
Storage temperature	T_{stg}	-40 to +100	°C

■ Electrical and optical characteristics ($T_a=25$ °C, per element)


Parameter	Symbol	Condition	Min.	Typ.	Max.	Unit	
Spectral response range	λ	Blue	-	400 to 540	-	nm	
		Green	-	480 to 600	-		
		Red	-	590 to 720	-		
Peak sensitivity wavelength	λ_p	Blue	-	460	-	nm	
		Green	-	540	-		
		Red	-	620	-		
Photo sensitivity	S	$\lambda=\lambda_p$	Blue	0.13	0.18	-	A/W
			Green	0.18	0.23	-	
			Red	0.11	0.16	-	
Dark current	I_D	$V_R=1$ V All elements	-	5	100	pA	
Temperature coefficient of I_D	T_{CID}		-	1.12	-	times/°C	
Rise time	t_r	$V_R=0$ V, $R_L=1$ k Ω 10 to 90 %	-	0.2	-	μ s	
Terminal capacitance	C_t	$V_R=0$ V $f=10$ kHz	-	40	80	pF	

■ Spectral response

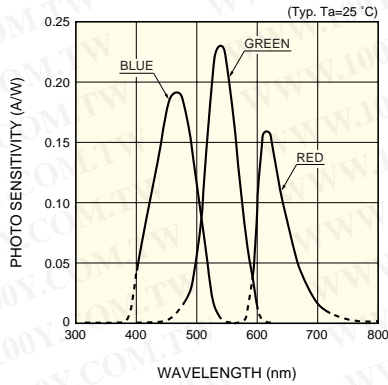


KSPDB0246EA

■ Dark current vs. reverse voltage

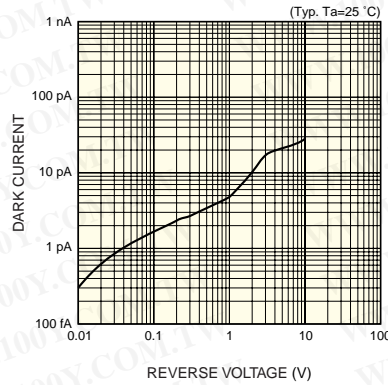


KSPDB0218EA

■ Terminal capacitance vs. reverse voltage

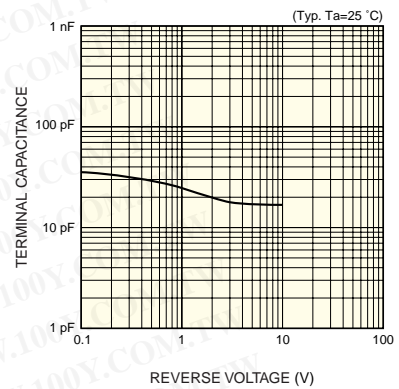

KSPDB0219EA

■ Dimensional outline (unit: mm)

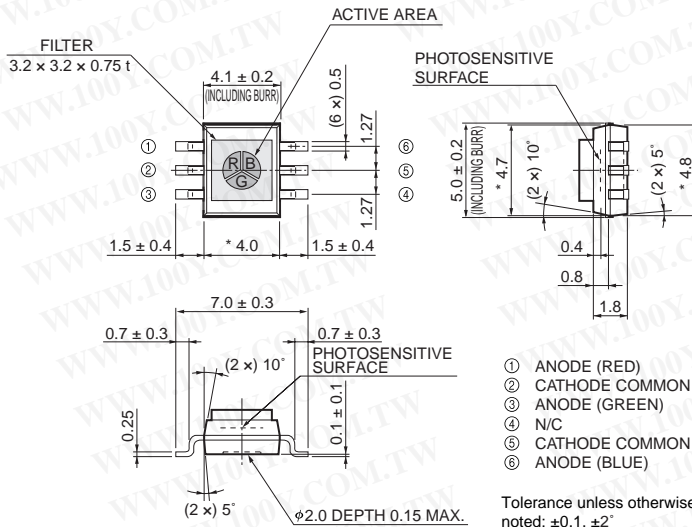

- ① ANODE (RED)
- ② CATHODE COMMON
- ③ ANODE (GREEN)
- ④ N/C
- ⑤ CATHODE COMMON
- ⑥ ANODE (BLUE)

Tolerance unless otherwise noted: $\pm 0.1, \pm 2^\circ$
 Shaded area indicates burr.
 Chip position accuracy with respect to the package dimensions marked *
 $X, Y \leq \pm 0.2, \theta \leq \pm 2^\circ$

KSPDA0162EA

勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-54151736
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)