

## SUPER FAST GLASS PASSIVATED RECTIFIERS


勝特力材料 886-3-5753170  
 勝特力电子(上海) 86-21-54151736  
 勝特力电子(深圳) 86-755-83298787  
[Http://www.100y.com.tw](http://www.100y.com.tw)

## FEATURES:

- Plastic package has Underwriters Laboratory Flammability Classification 94V-0
- Ideally suited for freewheeling diode power factor correction applications
- Excellent high temperature switching
- Optimized to reduce switching losses
- High temperature soldering guaranteed : 250°C /10 second,0.25"(6.35mm)from case

## MECHANICAL DATA

Case : JEDEC TO-220AB molded plastic  
 Terminals : Leads solderable per MIL-STD-750 Method 2026  
 Position : As marked  
 Mounting Position : Any  
 Mounting Torque : 5 in - lbs.max  
 Weight : 0.08 ounce,2.24grams

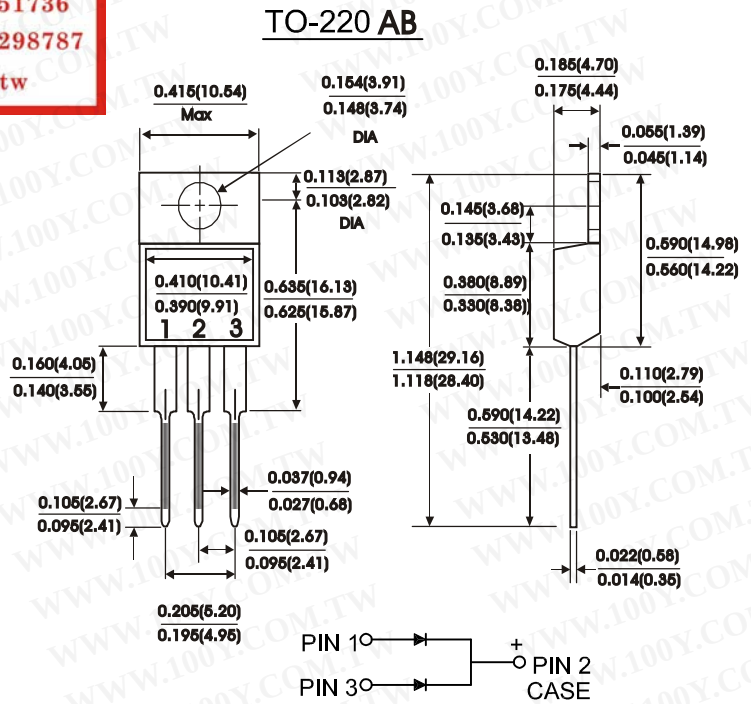

Dimensions in inches and (millimeters)

## MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Rating at 25 °C ambient temperature unless otherwise specified.

Single phase half wave, 60 Hz resistive or inductive load.

For capacitive load, derate current by 20%.

| Characteristic                                                                                                   | Symbol            | SF 10005CT    | SF 1001CT | SF 1002CT | SF 1003CT | SF 1004CT | SF 1006CT | Units          |
|------------------------------------------------------------------------------------------------------------------|-------------------|---------------|-----------|-----------|-----------|-----------|-----------|----------------|
| Maximum recurrent peak reverse voltage                                                                           | V <sub>RRM</sub>  | 50            | 100       | 200       | 300       | 400       | 600       | Volts          |
| Maximum RMS voltage                                                                                              | V <sub>RMS</sub>  | 35            | 70        | 140       | 210       | 280       | 420       | Volts          |
| Maximum DC blocking voltage                                                                                      | V <sub>DC</sub>   | 50            | 100       | 200       | 300       | 400       | 600       | Volts          |
| Maximum average forward rectified current at T <sub>c</sub> =100°C                                               | I <sub>(AV)</sub> | 10.0          |           |           |           |           |           | Amps           |
| Peak forward surge current 8.3ms single half sine-wave superimposed on rated load (JEDEC Method)(Per leg)        | I <sub>FSM</sub>  | 100           |           |           |           |           |           | Amps           |
| Maximum instantaneous forward voltage (Per leg) I <sub>F</sub> =5.0A                                             | V <sub>F</sub>    | 1.0           |           |           | 1.30      |           | 1.70      | Volts          |
| Maximum DC reverse current at rated DC blocking voltage (Per leg) T <sub>c</sub> =25 °C<br>T <sub>c</sub> =125°C | I <sub>R</sub>    | 10.0<br>500.0 |           |           |           |           |           | μA             |
| Typical reverse recovery time(NOTE 1)(Per leg)                                                                   | T <sub>RR</sub>   | 35            |           |           |           |           |           | nS             |
| Typical junction capacition (NOTE 2)(Per leg)                                                                    | C <sub>J</sub>    | 50            |           |           |           |           |           | P <sub>F</sub> |
| Operating temperature range                                                                                      | T <sub>J</sub>    | -55to+150     |           |           |           |           |           | °C             |
| Storage temperature range                                                                                        | T <sub>stg</sub>  | -55to+150     |           |           |           |           |           | °C             |

## NOTES:

(1)Reverse Recovery Test CONDITION :  $I_F=0.5A$ ,  $I_R=1.0A$ ,  $I_{RR}=0.25A$

(2)Measured at 1MHZ and reverse Voltage of 4.0V

(3)Marking : SF10005CT = SF10005 (Without Marking "CT")  
 Symbol Marking

# RATINGS AND CHARACTERISTIC CURVES SF10005CT THRU SF1006CT

FIG.1 - TYPICAL FORWARD CURRENT DERATING CURVE

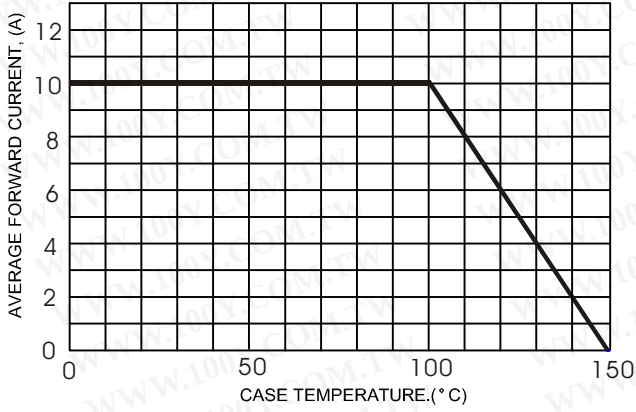


FIG.2 - TYPICAL FORWARD CHARACTERISTICS

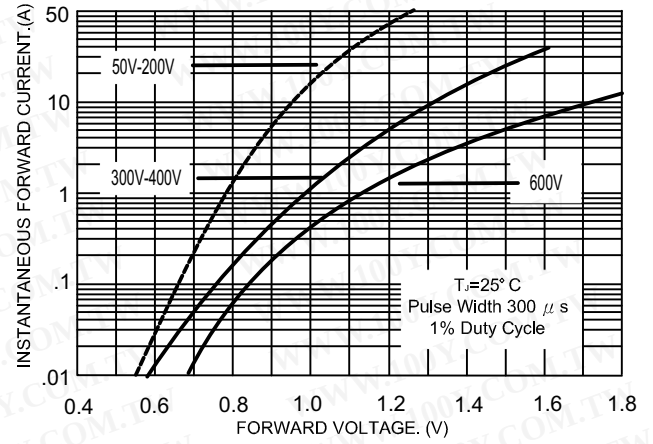


FIG.3 - MAXIMUM NON-REPETITIVE FORWARD SURGE CURRENT

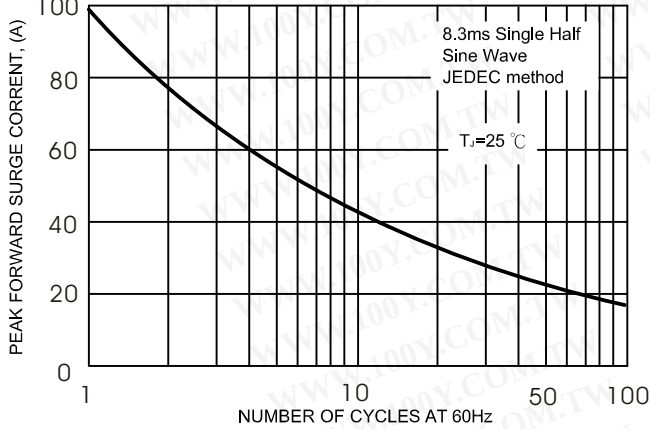


Figure 6 GR1 Test Circuit

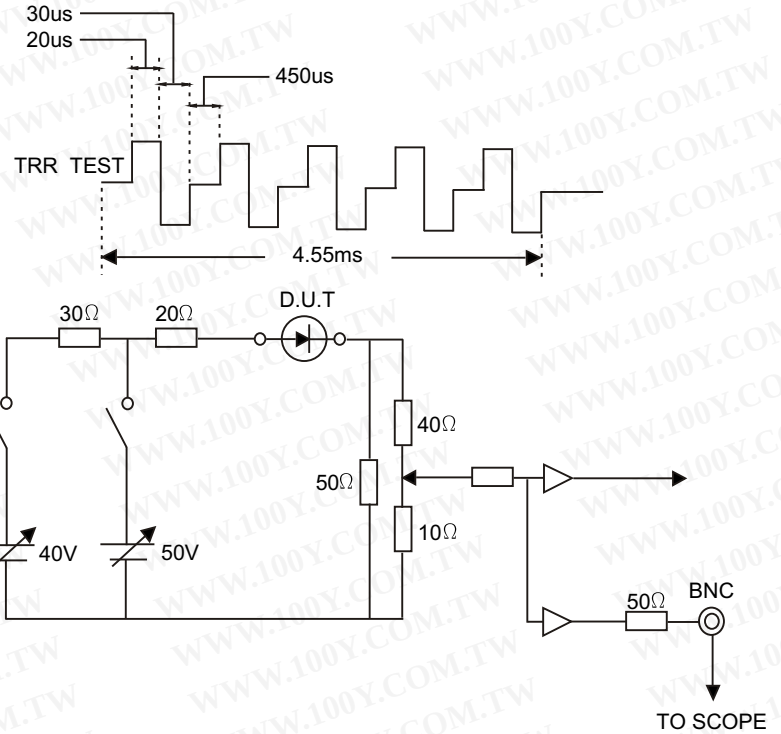


FIG.4- TYPICAL JUNCTION CAPACITANCE



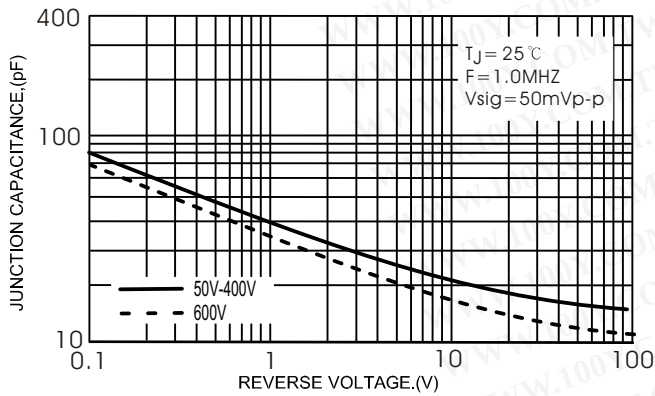


FIG.5- TYPICAL REVERSE CHARACTERISTICS

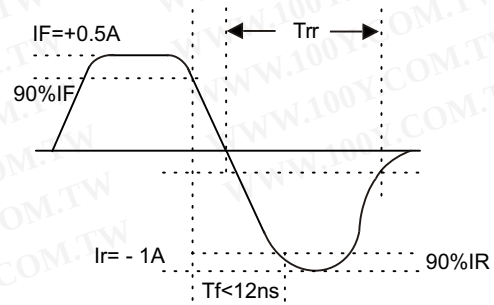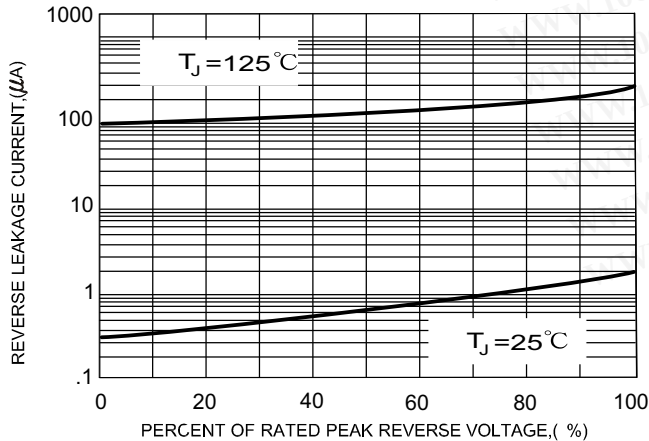

勝特力材料 886-3-5753170  
 勝特力电子(上海) 86-21-54151736  
 勝特力电子(深圳) 86-755-83298787  
[Http://www.100y.com.tw](http://www.100y.com.tw)